

JINBEI

与您共创 美好影像世界

CREATE FANTASTIC IMAGING



JINBEI CAMERA FLASH | 2023

金贝摄影闪光灯



上海金贝摄影器材实业有限公司

Shanghai Jinbei Photographic Equipments Co., LTD.

上海市长宁区定西路788号7楼H座 (200052)

7H Block, No.788 DingXi Road, 200052 Shanghai, P.R.China

Tel: +86-21-61169322

Fax: +86-21-61169286


scb@goldenshell.com.cn

品牌故事

BRAND STORY

上海金贝摄影器材实业有限公司创立于1995年，专注摄影、摄像光源行业近三十年。是一家集产品研发、设计、制造、销售、服务于一体的综合性专业器材企业。总部位于中国上海，业务遍及全球各个国家和地区。金贝品牌以稳定、可靠的产品品质，切合市场需求的产品，坚持匠心精神的企业文化，创造出一代又一代性能卓越、技术领先的专业光源产品及附件，成为摄影、视频、直播行业中最具影响力的品牌之一。

Shanghai Jinbei Photographic Equipment Industrial Co., Ltd. was founded in 1995, specializing in photography and videography light source industry for nearly 30 years. Jinbei is a comprehensive professional equipment enterprise integrating product R&D, design, manufacturing, sales and service. Headquartered in Shanghai, China, the company has developed the business in various countries and regions around the world. Jinbei brand created generations of professional light source products and accessories with excellent performance and leading technology with stable and reliable product quality, products with market-demands, and enterprise culture of ingenuity. Jinbei has become one of the most influential brands in the photography, video and live streaming industries.

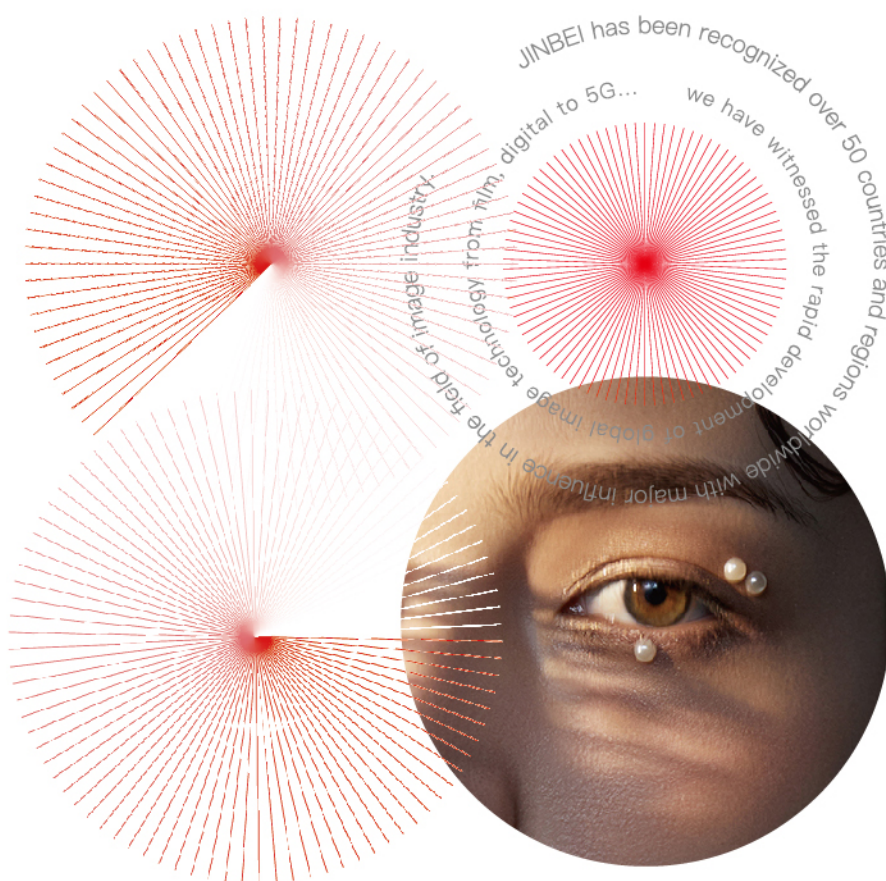



作为闪光灯领域的先驱者，金贝摄影光源拥有丰富的产品线，包括影室闪光灯、外拍闪光灯、机顶闪光灯及专业塑光附件。结合多年沉淀的技术优势，金贝产品在闪光持续时间、回电速度、新能源锂电池等重点技术领域持续创新突破。金贝始终追求高品质的影像画质，在凝固动态瞬间，画质锐度等方面满足摄影师的专业需求。

作为 COB 点光源常亮灯的先行者，金贝不断研发出可调色温区间大、显色性高、RGB 色谱全的高品质 LED 产品，并融合了人性化的 APP 灯光控制系统。操作便捷、性能稳定、色彩精准的金贝影视光源产品助力了摄像和直播领域的兴起及发展。

金贝拥有雄厚的研发技术团队，大型生产基地，先进的生产设备，科学的管理体系，保证产品的性能与质量。金贝人将继续响应市场需求，发挥自身研发、品牌、企业精神等优势，将前沿科研成果应用于摄影、摄像、直播等光源产品领域，与您共创美好的影像世界。

As a pioneer in the field of flash, Jinbei's flash and strobe has a rich product line, including studio flash, outdoor flash, speedlite and professional modifier accessories. Combined with the technical advantages of years, Jinbei products continue to innovate and make breakthroughs in key technical fields such as flash duration, recycling time, and new energy lithium batteries. Jinbei always pursues high quality image quality, and meets the demands of photographers in terms of freezing dynamic moments and sharpness of image quality.

As the forerunner of COB constant light source, Jinbei has continuously developed high-quality LED products with large tunable color temperature range, high color rendering, and full RGB color spectrum, combining humanized APP lighting control system. With convenient operation, stable performance and accurate color, Jinbei LED light source products helped the rise and development in the field of videography and live streaming.

Jinbei has a strong R&D technical team, large production base, advanced production equipment, scientific management system to ensure the performance and quality of products. Jinbei team will continue to respond to market demand, give full play to research and development, brand, enterprise spirit and other advantages. By applying cutting-edge scientific research results to photography, videography, live-streaming and other light source products, Jinbei creates fantastic imaging with you.

目录

CONTENTS

影室闪光灯

Studio Flash

- 06 PILOT III PRO 商业级影室闪光灯
High Flash Duration Studio Flash
- 08 MSN PRO专业高速影室闪光灯
High-speed Sync Studio Flash
- 10 DPXII专业影室闪光灯
Professional Studio Flash
- 11 DMII专业便携影室闪光灯
Professional Portable Studio Flash
- 12 SPARK 400D电商网拍摄影灯
E-commerce Studio Flash
- 13 DE网拍小型摄影灯
Portable Studio Flash

外拍闪光灯

Battery-powered Monolight

- 15 HD610-PRO高速一体外拍灯
Battery-powered Monolight
- 16 HD-400PRO高速外拍闪光灯
Battery-powered Monolight
- 17 HD200-PRO便携高速外拍灯
Battery-powered Monolight

机顶闪光灯

Speedlite

- 19 HD-2MAX/HD-2MAX(S)高速机顶灯
HD-2MAX/HD-2MAX(S) HSS Speedlite
- 21 HD-1/HD-1(S)机顶闪光灯
HD-1/HD-1(S) HSS Speedlite
- 22 Hi900/Hi900(S)机顶闪光灯
Hi900/Hi900(S) HSS Speedlite
- 23 Hi5复古机顶灯
Hi5 HSS Retro Speedlite
- 24 机顶灯选购附件
Speedlight Optional Accessories



引闪器

Flash Trigger

摄影附件

Photographic Accessories

- 25 TR-Q7II/TR-Q6II复合热靴引闪器
Integrated Hot-shoe Flash Trigger
- 26 TR-V6II通用热靴引闪器
Integrated Hot-shoe Flash Trigger
- 27 TR-A3/A9交流供电通用引闪器
Ac Powered Universal Flash Trigger

- 28 金贝标准三爪卡口反光罩/附件
Jinbei Standard Mount Reflector / Accessory
- 29 束光筒/反光罩/聚光筒
Focusing Snoot / Reflector / Spot snoot
- 30 M/DM系列柔光箱
M/DM Softbox
- 31 KE系列深口柔光箱
KE Deep Quick Open Softbox
- 32 65/85/105cm深抛柔光箱
Deep Beauty Dish Softbox
- 32 球型柔光罩
Quick Ball Softbox

- 33 深口直反射柔光箱
Deep Reflective Softbox
- 34 专业旗板/柔光屏
Professional Frame Scrim Diffuser
Folding Frame Scrim Diffuser
- 35 专业摄影灯架系列
Professional Photography Light Stand Series
- 43 反光伞/柔光伞/太阳伞
Reflective Umbrella/Soft Umbrella/Sun Umbrella
- 44 横杆背景架/电动升降架/天花路轨
Background Stand/Electric Lifting Frame/Ceiling Rail
- 45 套装箱包/灯架袋
Bag/Stand Bag



凌
Ling Lei
磊

PILOT III PRO 商业级影室闪光灯

High Flash Duration Studio Flash

STUDIO FLASH

影室
闪光灯

06



调焦闪光管
Zoom flash tube



规格参数 Parameters

型号 Type	PILOTIII-800pro	PILOTIII-1200pro
编码 Code	1.01.021812	1.01.021813-1
功率 Power / 指数GN	800Ws/GN90	1200Ws/GN110
功率调节 Flash power variation	6档调光, M: 4.0-9.0(1/32-1/1)	
回电时间 Recycling time	0.3-1.2s	0.3-1.3s
同步模式 SYNC mode	标准模式 Nor	
闪光持续时间 Flash duration (t=0.5)	1/4700s~1/20000s	1/3500s~1/20000s
造型灯 Modeling lamp	30W LED (色温 Color temperature: 4100K±200K)	
色温 Color temperature	5500K±100K	
金贝2.4GHz无线系统 JINBEI wireless system	适配TR-Q7II复合热靴引闪器, 兼容TR-V6II/TR-Q6II引闪器 Compatible with TR-Q7II /TR-V6II/TR-Q6II	
遥控距离 Range >100m	兼容 Compatible with Canon/Nikon/Sony/Fuji/Panasonic/Olympus	
频道 CH	31个频道, CH: 01-31	
组别 GR	16个组别, GR: A/B/C/D/E/F/G/H/I/J/L/O/P/Q/S/U	
光敏感应 Cell / 蜂鸣 Beep / 蒙版模式 Easy cap / 延迟闪光 Delay	支持 Support	
电源 Operating	AC 195-265V 50/60Hz 15A AC 195-265V 50/60Hz 20A	
尺寸 Dimensions(LxWxH)	455x150x220mm	470x150x220mm

1/3500~1/20000s



1200Ws

高闪光持续时间

High flash duration

全光1.3s回电

1.3s recycling time at full power



定制O型闪光管

Customized 'O' type flash tube



调焦闪光管

Zoom flash tube



标准色温

Constant colour temperature



30W LED

Modeling lamp

拍摄案例 Photography case



闪光持续时间高达1/20000s

Flash duration up to 1/20000s

选购附件 Optional accessories



M9专业反光罩

M9 Inch professional reflector

#1.08.011202

φ24cm H:19.5cm

70°照射角度 Beam



KE-35x140

专业格栅柔光箱

Softbox with Grid

#1.07.051113

35x140cm



M-9四页挡板套装

Reflector barndoor

#1.08.031603



10°/30°/60° 蜂窝网

Honey comb

#1.08.031604 #1.08.031602

#1.08.031601



摄影作品：凌磊

MSN PRO 专业高速影室闪光灯

High-speed Sync Studio Flash

STUDIO FLASH

影室
闪光灯

08



规格参数 Parameters

型号 Type	MSN-400pro	MSN-600pro	MSN-800pro	MSN-1200pro
编码 Code	1.01.021716	1.01.021717	1.01.021718	1.01.021719
功率 Power / 指数GN	400Ws/GN66	600Ws/GN80	800Ws/GN90	1200Ws/GN110
功率调节 Flash power variation	9档调光: 1.0~9.0(1/256~1/1) / HSS高速: 4.0~9.0(1/32~1/1)			
回电时间 Recycling time	0.05~0.8s			0.05~0.9s
同步模式 SYNC mode	标准模式 Nor / 定格模式 Fre / 高速同步模式 HSS			
闪光持续时间 Flash duration	标准 Nor: 1/900s~1/8500s / 定格 Fre: 1/900s~1/56000s			
造型灯 Modeling lamp	30W LED (色温 Color temperature: 4100K±200K)			
色温 Color temperature	Nor: 5500K±100K / HSS: 5500K±300K / Fre: 5400K-9500K			
金贝2.4GHz无线系统 JINBEI wireless system	适配TR-Q7II复合热靴引闪器, TR-Q6 II复合热靴引闪器 Compatible with TR-Q7II and TR-V6			
遥控距离 Range	>100m 兼容 Compatible with Canon/Nikon/Sony/Fuji/Panasonic/Olympus			
频道 CH	32个频道, CH: 00~31			
组别 GR	16个组别, GR: A/B/C/D/E/F/G/H/I/J/L/O/P/Q/S/U			
光敏感应 Cell / 蜂鸣 Beep / 蒙版模式 Easycap / 频闪模式 Multi-flash/主控模式	支持 Support			
电源 Operating	AC 195~245V 50/60Hz 20A 保险丝 Fuse			
尺寸 Dimensions(LxWxH)	380(400Ws)/415(600Ws)/425(800Ws)/475(1200Ws)x145x225mm			

选购附件 Optional accessories



DPφ6聚光筒
Spot snoot
#1.08.041303
尺寸 Dimensions:
H: 22.8cm



KE-90/KE-120深口柔光箱
Softbox
#1.07.051120 #1.07.051121
尺寸 Dimensions:
φ90cm/φ120cm



CK-1 魔术腿灯架
Steel Light Stand
#1.09.051101

M-6 旋转式多用不锈钢
影视灯架
Rotatable multifunctional
stainless Steel Light
Stand
#1.09.051304

HSS 1/8000 s

高速同步闪光

High-speed sync up to 1/8000s

1/56000s

高闪光持续时间

High flash duration



800Ws

全光0.8s回电

Full power 0.8s recycling time



高速连拍20张/秒

High-speed burst 20fps



恒定色温

Constant Colour temperature



30W LED

Modeling lamp

拍摄案例 Photography case



1/56000s高闪光持续时间





DPXII 专业影室闪光灯

Professional Studio Flash

STUDIO FLASH

影室
闪光灯

10



高强度连续拍摄
Continuous flash shooting



600Ws
全光0.9s回电
0.9s recycling time at full power



蒙版快速抠底
EasyCap mode



25W LED
Modeling lamp



恒定色温
Constant colour temperature



内置无线接收
Built-in wireless wreceiver



1.延迟闪光按键 2.闪光测试按键 3.3.5mm闪光同步插孔 4.蜂鸣提示音/造型灯回电提示同步亮暗按键 5.调光/确认按钮 6.蒙版/主控模式 7.电源插座 8.造型灯开关 9.无线接收模式/光敏感应按钮 10.GR/CH蒙版设置

规格参数 Parameters

型号 Type	DPX-400II	DPX-600II	DPX-800II	DPX-1000II
编码 Code	1.01.021613	1.01.021614	1.01.021615	1.01.021616
功率 Power / 指数GN	400Ws/GN66	600Ws/GN80	800Ws/GN90	1000Ws/GN103
功率调节 Flash power variation	7档调光: 3.0~9.0(1/64~1/1)			
回电时间 Recycling time	0.05~0.8s	0.05~0.9s	0.05~0.9s	0.05~0.9s
同步模式 SYNC mode	标准模式 Nor mode (Nikon<1/320s, Canon / Sony / Fuji<1/250s)			
闪光持续时间 Flash duration	1/800s~1/2500s			
造型灯 Modeling lamp	25W LED (色温 Color temperature: 4100K±200K)			
色温 Color temperature	5500K±200K			
金贝2.4GHz无线系统 JINBEI wireless system	适配TR-V6II通用型引闪器, 兼容TR-Q7II复核热靴引闪器 Compatible with TR-V6II/Compatible with TR-Q7II			
遥控距离 Range	300m			
频道 CH	32个频道, CH: 00~31			
组别 GR	16个组别, GR: A/B/C/D/E/F/G/H/I/J/L/O/P/Q/S/U			
光敏感应 Cell / 蜂鸣 Beep / 蒙版模式 EasyCap / 延迟闪光 Delay	支持 Support			
电源 Operating	AC 195~245V 50/60Hz 20A 保险丝 Fuse			
尺寸 Dimensions(LxWxH)	335(L)x125(W)x225(H)mm		370(L)x125(W)x225(H)mm	

拍摄案例 Photography case



电商服装/人像摄影/商业摄影
Commercial/ Portrait/ E-Commercial Shooting

DMII 专业便携影室闪光灯

Professional Portable Studio Flash

STUDIO FLASH

影室
闪光灯

11



 连续拍摄不过热
Continuous flash shooting

 600Ws
全光1s回电
1s recycling time at full power

 蒙版快速抠底
EasyCap mode

 15W LED
Modeling lamp

 5500K±200K标准色温
Constant colour temperature

 CHGR
内置无线接收
Built-in wireless receiver



规格参数 Parameters

型号 Type	DMII-3	DMII-4	DMII-5	DMII-6
编码 Code	1.01.011310	1.01.011311	1.01.011312	1.01.011313
功率 Power / 指数GN	300Ws/GN60	400Ws/GN66	500Ws/GN72	600Ws/GN80
功率调节 Flash power variation	7档调光: 3.0~9.0 (1/64~1/1)			
回电时间 Recycling time	0.1~0.8s	0.1~0.9s	0.1~0.9s	0.1~1.0s
同步模式 SYNC mode	标准模式 Nor mode (Nikon<1/320s, Canon / Sony / Fuji<1/250s)			
闪光持续时间 Flash duration	1/800s~1/2200s			
造型灯 Modeling lamp	15W LED (色温 Color temperature: 4100K±200K)			
色温 Color temperature	5500K±200K			
金贝2.4GHz无线系统 JINBEI wireless system	适配TR-V6II通用型引闪器, TRS-V引闪器 Compatible with TR-V6, TRS-V flash driver			
遥控距离 Range	>100m			
频道 CH	32个频道, CH: 00~31			
组别 GR	16个组别, GR: A/B/C/D/E/F/G/H/I/J/L/O/P/Q/S/U			
光敏感应 Cell / 蜂鸣 Beep / 蒙版模式 EasyCap	支持 Support			
电源 Operating	AC 195~245V 50/60Hz 15A 保险丝 Fuse			
尺寸 Dimensions(LxWxH)	270x135x205mm			

拍摄案例 Photography case



电商服装/人像摄影/商业摄影
Commercial/ Portrait/ E-Commercial Shooting

选购附件 Optional accessories

 55°标准反光罩
55°standard reflector
#1.08.011201
φ20cm H:15cm
55°照射角度 Beam



KE-100专业八角柔光箱
Octagonal softbox
#1.07.051118
φ100cm



JB-A标准附件套装
JB-A accessory set
#1.08.051101



100cm 黑银/本白柔光太阳伞
Black/Silver/White Umbrella
#3.10.041101 #3.10.041103
φ100cm

SPARK 400D 电商网拍摄影灯

E-commerce Studio Flash

STUDIO FLASH
影室
闪光灯

12



规格参数 Parameters

型号 Type	SPARK-400D
编码 Code	1.01.021111
功率 Power / 指数GN	400Ws/GN66
功率调节 Flash power variation	6档调光 4.0~9.0 (1/32—1/1)
回电时间 Recycling time	0.1-0.9s
同步模式 SYNC mode	标准模式 Nor mode (Nikon<1/320s, Canon / Sony / Fuji<1/250s)
闪光持续时间 Flash duration	1/800s-1/2200s
造型灯 Modeling lamp	15W LED (色温 Color temperature: 4100K±200K)
色温 Color temperature	5500K±200K
金贝2.4GHz无线系统 JINBEI wireless system	选配TR-V6II发射器, 兼容TR-Q7II/TR-Q6II/TRS-V5II闪器 Optional TR-V6II transmitter, compatible with TR-Q7II/TR-Q6II/TRS-V flash
遥控距离 Range	>100m
频道 CH	32个频道, CH: 00-31
组别 GR	16个组别, GR: A/B/C/D/E/F/G/H/I/J/L/O/P/Q/S/U
光敏感应 Cell / 蜂鸣 Beep / 蒙版模式 Easycap	支持 Support
电源 Operating	AC 195~245V 50/60Hz 15A 保险丝 Fuse
尺寸 Dimensions(LxWxH)	265x132x215mm

拍摄案例 Photography case



选购附件 Optional accessories



M-950八角柔光箱
Octagonal softbox
#1.07.031107
φ95cm



M-60x90 柔光箱
Softbox
#1.07.031102
尺寸 Dimensions: 60x90cm



MII-束光筒
Conical snoot
#1.08.041102
尺寸 Dimensions:
φ8cm φ6.2cm H:25cm



JB-2600FP气垫铝灯架
Aluminium stand
#1.09.041401-1



电商网拍/服装人像/网销产品
E-commerce Shoot/Portrait/Online Sales Products



适配TR-A9交流供电16通道引闪器
TR-A9 Flash Trigger

规格参数 Parameters

型号 Type	DE-250
编码 Code	1.01.011501
功率 Power / 指数GN	250Ws/GN50
功率调节 Flash power variation	6档调光: 1/32~1/1
回电时间 Recycling time	0.5~1.3s
同步模式 SYNC mode	标准模式 Nor mode (Nikon<1/320s, Canon / Sony / Fuji<1/250s)
闪光持续时间 Flash duration	1/800s~1/2000s
造型灯 Modeling lamp	5W LED (色温 Color temperature: 3500K±300K)
造型灯模式 Modeling lamp mode	全光 Full / 关闭 Off
色温 Color temperature	5500K±200K
同步插孔 SYNC	3.5mm
同步电压 Voltage	DC5V
光敏感应 Cell / LED 回电指示灯	支持 Support
电源 Operating	AC 195~245V 50/60Hz 5A 保险丝 Fuse
尺寸 Dimensions(LxWxH)	195x95x155mm



连续拍摄不过热
Continuous flash shooting



全光1.3s回电
Full power 1.3s recycling time



5500K标准色温
Constant colour temperature



灯体轻巧便携
Compact and portable



5W LED
Modeling lamp


选购附件 Optional:




DE-50x70柔光箱
Softbox
#1.07.011303
50x70cm



DE-60八角柔光箱
Octagonal softbox
#1.07.011304
φ60cm



DE250反光灯罩
portable reflector
#1.08.051305
φ15cm H:10.7cm



DE250附件套装
Accessory set
#1.08.061101



DII-小型束光筒
Conical snoot
#1.08.051303
φ6.2cm H:15.5cm

拍摄案例 Photography case



A woman is standing in a vast desert landscape, wearing a highly ornate traditional Chinese costume. The costume is primarily red, with a long, flowing skirt and a jacket featuring intricate gold and green floral embroidery. She wears a red hat with a large, feathery plume. Her hair is styled in a traditional updo. The background consists of rolling sand dunes under a bright blue sky filled with soft, white clouds. The lighting is bright, suggesting a sunny day.

外拍闪光灯

Battery-Powered
Monolight

摄影作品

HD610-PRO 高速一体外拍灯

Battery-Powered Monolight

Battery-Powered Monolight
外拍
闪光灯
15



可选配AC/DC
室内外两用
Dual AC/DC use



规格参数 Parameters

型号 Type / 编码 Code	HD-610pro / 1.02.011707
功率 Power / 指数GN	600Ws/GN80
功率调节 Flash power variation	9档调光: 1.0~9.0(1/256~1/1) / HSS高速: 4.0~9.0(1/32~1/1)
回电时间 Recycling time	0.05~0.9s
同步模式 SYNC mode	标准模式 Nor / 定格模式 Fre / 高速同步模式 HSS
闪光持续时间 Flash duration	标准 Nor: 1/850s~1/8500s / 定格 Fre: 1/850s~1/25000s
造型灯 Modeling lamp	25W LED (色温 Color temperature: 4100K±200K)
色温 Color temperature	Nor: 5500K±100K / HSS: 5500K±300K / Fre: 5400K~9500K
金贝2.4GHz无线系统 JINBEI wireless system	适配TR-Q7II复合热靴引闪器, 兼容TR-V6引闪器 Compatible with TR-Q7II and TR-V6
遥控距离 Range >100m	兼容 Compatible with Canon/Nikon/Sony/Fuji/Panasonic/Olympus
频道 CH	32个频道, CH: 00~31
组别 GR	16个组别, GR: A/B/C/D/E/F/G/H/I/J/L/O/P/Q/S/U
光控 Cell / 蜂鸣 Beep / 蒙版模式 Easy cap / 固件升级 Firmware upgrades	支持 Support
锂电池 Lithium battery	DC 16.8V 6000mAh
续航 Capacity	全光 Full >360次
尺寸 Dimensions(LxWxH)	345x120x180mm

标准配件 Standard accessories



MH色片灯罩 (含滤色纸*6)
Magnetic reflector (with gels)
(including color filter*6)
#1.08.011705

选配 Optional:



交流适配器
Ac adapter
#1.06.040163



DC 16.8V 6000锂电池
Lithium battery



TR-Q7II复合热靴引闪器
TR-Q7II Flash Trigger

HSS/TTL

高速同步/自动测光
High-speed sync / TTL flash

600Ws

全光0.9s回电
Full power 0.9s recycling time



25W LED
Modeling lamp



高速连拍20张/秒
High-speed burst 20fps

>360

全功率续航
Full power capacity

产品特点 Features

金贝 HD-610PRO 专业外拍闪光灯, 拥有 600Ws 大功率 HSS 1/8000s 高速闪光同步, 满足高速抓拍瞬间定格。0.05 ~ 0.9s 快速回电, 9 级调光, 与相机同步支持 20 张 / 秒高速连拍, 闪光持续时间高达 1/25000s, 质感清晰细腻。恒定色温 5500k±100K, 25W LED 暖光造型灯, 对焦清晰明了。DC16.8V/6000mAh 大容量锂电池, 全功率连续闪光 >360 次。内置 2.4G 无线系统, APP 无线遥控调节, 兼容多品牌 TTL 自动闪光系统。标配 HM 色片灯罩和 6 种颜色色片, 营造拍摄效果。选配 AC 电源适配器满足摄影棚长时间拍摄需求。保荣附件卡口兼容各种塑光附件, 拍摄轻松自如。

Jinbei HD-610PRO is a professional outdoor strobe. Output power is up to 600Ws, and high-speed shutter sync is up to 1/8000s. Fast recycling time takes 0.05s to 0.9s, and makes the 20FPS burst shooting possible. It also supports 9 F-stop adjustable ranges to create a suitable power output.

HD-610PRO's flash duration is up to 1/25000s for capturing sharp and vivid images. It also support constant color temperature that falls in 5500K±100K, and equipped a 25W warm LED modelling lamp for you to have a sharp focus.

HD-610PRO is powered by a DC16.8V/6000mAh Li-ion battery that support up to 360 flashes on full power output. AC adapter is also available for studio photography.

Built-in 2.4G wireless system allows controlling the flash by a trigger or via Jinbei App. MH reflector and 6 color gels include in the delivery can help to create any type of shooting. Bowens mounts supports all various light-shape accessory.

HD-400PRO 高速外拍闪光灯

Battery-Powered Monolight

Battery-Powered Monolight
外拍
闪光灯

16



规格参数 Parameters

型号 Type / 编码 Code	HD-400pro / 1.02.011706
功率 Power / 指数GN	400Ws/GN66
功率调节 Flash power variation	9档调光: 1.0~9.0(1/256~1/1) / TTL: ± 3.0 EV
回电时间 Recycling time	0.05~0.9s
同步模式 SYNC mode	标准模式 Nor / 定格模式 Fre / 高速同步模式 HSS
闪光持续时间 Flash duration	标准 Nor: 1/1000s~1/8500s / 定格 Fre: 1/1000s~1/20000s
造型灯 Modeling lamp	20W LED (色温 Color temperature: 4100K $\pm$ 200K)
色温 Color temperature	Nor: 5500K $\pm$ 100K / HSS: 5500K $\pm$ 300K / Fre: 5400K~9500K
金贝2.4GHz无线系统 JINBEI wireless system	适配TR-Q7II复合热靴引闪器, 兼容TR-V6引闪器 Compatible with TR-Q7II and TR-V6
遥控距离 Range >100m	兼容 Compatible with Canon/Nikon/Sony/Fuji/Panasonic/Olympus
频道 CH	32个频道, CH: 00~31
组别 GR	16个组别, GR: A/B/C/D/E/F/G/H/I/J/L/O/P/Q/S/U
光控 Cell / 蜂鸣 Beep / 蒙版模式 EasyCap / 固件升级 Firmware upgrades	支持 Support
锂电池 Lithium battery	DC 14.8V 4400mAh
续航 Capacity	全光 Full >450次
尺寸 Dimensions(LxWxH)	280x125x190mm

标准配件 Standard accessories



DC 14.8V 4400锂电池
Lithium battery



锂电池充电器
Lithium battery charger



ϕ 14cm外拍灯罩
(包含5片磁吸式滤色片)
Magnetic reflector (with gels)
#1.08.011704



套装箱
case bag

HSS/TTL

高速同步/自动测光
High-speed sync /TTL flash



全光0.9s回电
Full power 0.9s recycling time

> 450

全功率续航
Full power capacity



20W LED
Modeling lamp



一体式便携设计
Integrated fuselage battery

产品特点 Features

金贝 HD-400PRO TTL 高速一体式外拍闪光灯, 拥有 400Ws 大功率 HSS 1/8000s 高速闪光同步, 满足高速抓拍瞬间定格。0.05 ~ 0.9s 快速回电, 9 级调光, 与相机同步支持 20 张 / 秒高速连拍, 闪光持续时间高达 1/25000s, 质感清晰细腻。恒定色温 5500k $\pm$ 100K, 20W LED 造型灯。DC14.8V/4400mAh 大容量锂电池, 全功率连续闪光>450 次, 支持边充电边闪光满足摄影棚使用。内置 2.4G 无线系统, APP 无线遥控调节, 兼容多品牌 TTL 自动闪光系统。标配 5 种颜色色片, 渲染画面气氛。保荣附件卡口兼容各种塑光附件, 拍摄轻松自如。

Jinbei HD-400PRO is a professional outdoor strobe. Output power is up to 400Ws, and high-speed shutter sync is up to 1/8000s. Fast recycling time takes 0.05s to 0.9s, and makes the 20FPS burst shooting possible. It also supports 9 F-stop adjustable ranges to create a suitable power output.

HD-400PRO's flash duration is up to 1/25000s for capturing sharp and vivid images. It also support constant color temperature that falls in 5500K $\pm$ 100K, and equipped a 20W warm LED modelling lamp for you to have a sharp focus.

HD-400PRO is powered by a DC14.8V/4400mAh Li-ion battery that support up to 450 flashes on full power output. When connected with an AC adapter, in studio use is also available.

Built-in 2.4G wireless system allows controlling the flash by a trigger or via Jinbei App. 4 color gels include in the delivery can help to create any type of shooting. Bowens mounts supports all various light-shape accessory.

HD200-PRO 便携高速外拍灯

Battery-Powered Monolight

Battery-Powered Monolight
外拍
闪光灯

17



功率大，体积小
小型口袋闪光灯

Portable Battery Monolight

规格参数 Parameters

型号 Type / 编码 Code	HD-200pro / 1.02.011709
功率 Power / 指数GN	200Ws/GN45
功率调节 Flash power variation	9档调光: 1.0~9.0(1/256~1/1) / TTL: ± 3.0 EV
回电时间 Recycling time	0.05~1.3s
同步模式 SYNC mode	标准模式 Nor / 定格模式 Fre / 高速同步模式 HSS
闪光持续时间 Flash duration	标准 Nor: 1/800s~1/8000s / 定格 Fre: 1/800s~1/20000s
造型灯 Modeling lamp	5W LED (色温 Color temperature: 4700K~5000K)
色温 Color temperature	Nor: 5500K ± 150 K / HSS: 5500K ± 300 K / Fre: 5200K~9000K
金贝2.4GHz无线系统 JINBEI wireless system	适配TR-Q7II复合热靴引闪器，兼容TR-V6引闪器 Compatible with TR-Q7II and TR-V6
遥控距离 Range >100m	兼容 Compatible with Canon/Nikon/Sony/Fuji/Panasonic/Olympus
频道 CH	32个频道, CH: 00~31
组别 GR	16个组别, GR: A/B/C/D/E/F/G/H/I/J/L/O/P/Q/S/U
光控 Cell / 蜂鸣 Beep / 蒙版模式 Easycap / 固件升级 Firmware upgrades	支持 Support
锂电池 Lithium battery / 续航 Capacity	DC 14.8V 2500mAh / 全光 Full >450次
同步插孔 SYNC	3.5mm / DC 5V
尺寸 Dimensions(LxWxH)	230x80x142mm

HSS/TTL

高速同步/自动测光
High-speed sync / TTL flash



全光1.3s回电
Full power 1.3s recycling time



5W LED
Modeling lamp

> 450

全功率续航
Full power capacity



一体式便携设计
Integrated fuselage battery

产品特点 Features

金贝 HD-200PRO 便携外拍闪光灯，拥有 200Ws 全光 1.3s 快速回电，闪光持续时间高达 1/20000s，质感清晰细腻。DC14.8V/2500mAh 大容量锂电池，全光 >450 次。体积小巧功能全，在光线复杂的情况下能够轻松自如获取拍摄效果。选配 AC 电源适配器满足摄影棚长时间拍摄需求，可转接保荣附件卡口兼容各种塑光附件。广泛适用于人像、静物、旅拍等拍摄需求。

Jinbei HD-200PRO portable strobe supports 200Ws and 1.3s power recycling at full power. The flash duration is up to 1/25000s for capturing sharp and vivid images. HD200-PRO is powered by a DC14.8V/2500mAh Li-Ion battery that support up to 450 flashes on full power output. The light weight and compact design creates the possibility to use under mixed lighting environment. When connected with an AC adapter, in-studio use is also available. Bowens mounts adapter expands the use of Bowens mount light-shape accessory

标准配件 Standard accessories



反光罩
Reflector



反光罩转接环
Reflector adapter
蜂窝网
Honey comb



DC14.8V 2500mAh
锂电池 & 充电器
lithium battery & Charger



滤色纸 x 6
Gels x 6



套包包
Case bag

选配 Optional:



HD-200束光筒
Conical snoot
#1.08.051306



HD-200转接环
Transfer bracket
#3.09.011102



HD-200柔光球
Soft ball
#1.08.012206



HD-65柔光箱
Soft box
#1.07.011308





摄影作品：张毅

产品特点 Features

金贝HD-2MAX机顶专业闪光灯采用Ω型闪光管80Ws输出功率，大直径圆形灯头设计点光源输出，光线均匀柔美，层次丰富，光比反差小。3W LED造型灯位于闪光中心在弱光环境对焦准确，测光精准，造型方便。复合热靴设计兼容佳能，尼康，富士，松下等，解决了一台闪光灯可适配多品牌相机，减少用户使用成本。2.8寸大触摸彩屏，中英文界面，全智能操作灵敏。DC11.1V/1600mAh大容量锂电池，1.3s快速回电全功率闪光达500次。科学的散热系统，全光连闪达100次，满足抓拍连拍的需求。金贝内置无线引闪系统，收发一体。磁吸式塑光附件，轻松控制和塑造光线。轻巧便携附件丰富，广泛适用于人像、静物、旅拍等拍摄需求。

Jinbei HD-2MAX professional speedlite has a built-in Ω flash bulb and supports 80Ws output. The design of round head provides the smooth, rich-layered and even-covering flash.

It also has a 3W LED modelling lamp at the center of the flash bulb to adjust focus in low-light environment.

The integrated hot shoe design makes it capable for multiple camera brands, without any other adapters. 2.8" full color touchable screen provides a dual-language UI and smart, intuitive interface. The HD-2MAX is powered by a DC11.1V/1600mAh Li-ion battery that support up to 500 flashes on full power output and a 1.3s recycling time. It also has a cooling system and support burst shooting up to 100 flashes.

HD-2MAX has a wireless built in with master, slave and speedlite modes. With its support of wide variety of magnetic accessories, it covers the use range of portrait, still life, travel photography and more.

HD-2MAX/HD-2MAX(S) 高速机顶灯

HD-2MAX/HD-2MAX(S) HSS Speedlite

Speedlight

高速
机顶灯

19



HSS/TTL

高速同步/自动测光
High-speed sync / TTL flash



全光1.3s回电
Full power 1.3s recycling time



Ω型专业闪光灯管
Ω professional flash tube



2.8寸触摸彩屏
2.8" touch color screen

> 500次

全功率续航
Full power capacity



3W LED
Modeling lamp

复合热靴 兼容多种相机品牌

Integrated Hot-shoe for multiple camera brands

适用佳能/尼康/富士/松下/奥林巴斯系列相机

Suitable for Canon/Nikon/Fuji/Panasonic/Olympus series cameras



复合热靴
Integrated Hot-shoe



索尼专用热靴
SONY Hot-shoe

专业Ω闪光灯管 Professional Ω flash tube

HD-2MAX圆头机顶灯
Round overhead flash

普通机顶闪光灯
Common top flash



180°照射角度
光线扩散均匀
180° Irradiation Angle
Uniform light diffusion



照射角度小
中心与边缘光比反差大
Low irradiation Angle
The contrast between center
and edge light ratio is large



适配TR-Q7II复合热靴引闪器
TR-Q7II Flash Trigger



标准配件 Standard accessories



DC11.1V 1600mAh
锂电池Li-ion Battery



灯头反光板
Bounce Card



灯头保护套
Protection Package



冷靴支架
Cold Shoe Holder



DC5V 3A充电头/Type-C
Charging Head



电池充电底座
Charging Base

规格参数 Parameters

型号 Type / 编码 Code	HD-2MAX / 1.02.011710	HD-2MAX (S)Sony / 1.02.011711
功率 Power / 指数GN	80Ws/GN60	
功率调节 Flash power variation	9档调光: 1.0-9.0(1/256-1/1) / TTL: ±3.0EV	
回电时间 Recycling time	0.05-1.3s	
同步模式 SYNC mode	前后帘同步 Rear Curtain SYNC / 高速同步HSS	
闪光持续时间 Flash duration	标准 Nor: 1/1700s-1/29600s / 定格 Fre: 1/2250s-1/80000s	
造型灯 Modeling lamp	3W LED (色温 Color temperature: 3100K~3400K)	
色温 Color temperature	5500K±200K	
金贝2.4GHz无线系统 JINBEI wireless system	适配TR-Q7II复合热靴引闪器 Compatible with TR-Q7II	
遥控距离 Range >100m	兼容 Compatible with Canon/Nikon/Sony/Fuji/Panasonic/Olympus	
频道 CH	31个频道, CH: 01-31	
组别 GR	16个组别, GR: A/B/C/D/E/F/G/H/I/J/L/O/P/Q/S/U	
蜂鸣 Beep / 对焦辅助 Focus peak / 固件更新 Firmware upgrades	支持 Support	
锂电池 Lithium battery / 续航 Capacity	DC 11.1V 1600mAh / 全光 Full >500次	
尺寸 Dimensions(LxWxH)	215(L)x79(W)x79(H)mm	



摄影作品：是阿开

产品特点 Features

金贝HD-1机顶专业闪光灯采用80Ws输出功率大直径圆形灯头设计，边缘光比反差小。3W LED造型灯3级亮度手动调节，在弱光环境下，辅助对焦，造型清晰。复合热靴设计兼容佳能，尼康，富士，松下等，解决了一台闪光灯可适配多品牌相机，减少用户使用成本。DC7.4V/2500mAh大容量锂电池，1.5s全光快速回电全功率闪光约500次。专业的散热系统，全光连闪达100次，满足连续抓拍的需求。金贝内置无线引闪系统，收发一体。磁吸式塑光附件，轻松控制和塑造光线。广泛适用于人像、静物、旅拍等拍摄需求。

Jinbei HD-1 professional shoe mount flash supports 80Ws output. With its round head design, it provides an even flash light coverage.

It also has a 3W LED modelling lamp that supports 3-stop to adjust focus in low-light environment.

The integrated hot shoe design makes it capable of working with multiple camera brands, without any other adapters.

HD-1 is powered by a DC7.4V/2500mAh Li-ion battery that support up to 500 flashes on full power output and a 1.5s recycling. It also has a cooling system and support burst shooting up to 50 full power flashes.

HD-1 has a wireless built in with master, slave and speedlite modes. With its support of wide variety of magnetic accessories, it covers the use range of portrait, still life, travel photography and more.

摄影作品：

HD-1/HD-1(S) 机顶闪光灯

HD-1/HD-1(S) HSS Speedlite

Speedlight

高速
机顶灯

21



HSS/TTL

高速同步/自动测光
High-speed sync /TTL flash



0.05~1.5s回电
Recycling time

全光闪~500次

大容量锂电池
Li-ion Battery



磁吸式附件
Magnetic attachment

复合热靴 兼容多种相机品牌

Integrated Hot-shoe for multiple camera brands

适用佳能/尼康/富士/松下/奥林巴斯系列相机

Suitable for Canon/Nikon/Fuji/Panasonic/Olympus series cameras



复合热靴
Integrated Hot-shoe



索尼专用热靴
SONY Hot-shoe



适配TR-Q6II闪光灯
TR-Q6II Flash Trigger

规格参数 Parameters

型号 Type / 编码 Code	HD-1/ 1.02.011714	HD-1(S)1.02.011715
功率 Power / 指数 GN	80Ws / GN60	
回电时间 Recycling Time	约0.05 ~ 1.5s	
功率调节 Flash Power Variation	M手动/HSS高速同步: 1.0-9.0(1/256-1/1) / TTL: $\pm$ 3.0EV	
灯头电动变焦 (Flash Head 6-speed Electric Zoom)	6档, 0~5 (范围约24~200mm)	
闪光模式 Flash Mode	M 手动模式 / FRE 定格模式 / TTL 自动模式	
同步模式 SYNC	前后帘同步Front / Rear Curtain SYNC / 高速同步HSS	
闪光持续时间 Flash Duration (t=0.5)	标准Nor: 1/800-1/10000s 定格Fre: 1/1500-1/50000s	
色温 Color Temperature	6000K $\pm$ 150K	
造型灯 Modeling Lamp	LED COB 3W (5000K~200K)	
金贝2.4GHz无线系统 JINBEI Wireless System	选配TR-Q6II复合热靴引闪器 Compatible with JINBEI TR-Q6II Transmitter	
遥控距离Range > 100m	兼容 Canon/Nikon/Sony/Fuji/Panasonic/Olympus	
频道 CH / 组别 GR 主控模式(Master)——31个频道 CH: 01-31 / 6个组别 GR: A/B/C/D/E/F	从属模式(Slave)——31个频道 CH: 01-31 / 16个组别 GR: A/B/C/D/E/F/G/H/I/J/L/O/P/Q/S/U 佳能RT模式(Canon ZigBee)——ON / OFF (ID: 00 ~ 99)	
锂电池 Lithium Battery / 续航 Capacity	DC 7.4V 2500mAh / 全光 Full 约500次	
电池寿命Battery Life 300次完全充放电 (电池容量约80%) 300 Charge Cycles(To 80% Capacity Left)		
自定义休眠时间设定(自动关机时间同步关联)	OFF, 5/15/30 分钟 (minute)	
蜂鸣 Buzz / 对焦辅助 AF Focus / 固件更新 Firmware Upgrades	支持 Support	
尺寸 Dimensions / 重量 Weight 195(L)x75(W)x65(H)mm / 460g(不含电池 Without Battery)		

标准配件 Standard accessories



DC 7.4V 2500mAh
锂电池Li-ion Battery



灯头保护套
Protection Package



冷靴支架
Cold Shoe Holder



DC5V 3A充电头
Charging Head



电池充电底座
Charging Base



Type-C数据线
Data Line

拍摄案例 Photography case



Hi900/Hi900(S) 机顶闪光灯

Hi900/Hi900(S) HSS Speedlite

Speedlight

高速
机顶灯

22



HSS/TTL

高速同步/自动测光

High-speed sync / TTL flash



全光1.5s回电

Full power 1.5s recycling time

全光闪≈500次

大容量锂电池

Li-Ion Battery



内置无线

Built-in wireless

复合热靴 兼容多种相机品牌

Integrated Hot-shoe for multiple camera brands

适用佳能/尼康/富士/松下/奥林巴斯系列相机

Suitable for Canon/Nikon/Fuji/Panasonic/Olympus series cameras



复合热靴

Integrated Hot-shoe



索尼专用热靴

SONY Hot-shoe



适配TR-Q6II闪光灯
TR-Q6II Flash Trigger

规格参数 Parameters

型号 Type / 编码 Code	Hi-900 / 1.02.011712	Hi-900(S) / 1.02.011713
功率 Power / 指数 GN	80Ws / GN60	
回电时间 Recycling Time	0.05 ~ 1.5s	
功率调节 Flash Power Variation	M手动/HSS高速同步: 1.0~9.0(1/256~1/1) / TTL: ±3.0EV	
灯头电动变焦 (Flash Head 6-speed Electric Zoom)	6档, 0~5 (范围约24~200mm)	
闪光模式 Flash Mode	M 手动模式 / FRE 定格模式 / TTL 自动模式	
同步模式 SYNC	前后帘同步Front / Rear Curtain SYNC / 高速同步HSS	
闪光持续时间 Flash Duration (t=0.5)	标准Nor: 1/800~1/10000s 定格Fre: 1/1500~1/50000s	
色温 Color Temperature	6000K±150K	
造型灯 Modeling Lamp	LED 3W (5500K±200K)	
金贝2.4GHz无线系统 JINBEI Wireless System 遥控距离Range>100m	选配TR-Q6II复合热靴引闪器 Compatible with JINBEI TR-Q6II Transmitter 兼容 Canon/Nikon/Sony/Fuji/Panasonic/Olympus	
频道 CH / 组别 GR 主控模式(Master)——31个频道 CH: 01~31 / 6个组别 GR: A/B/C/D/E/F 从属模式(Slave)——31个频道 CH: 01~31 / 16个组别 GR: A/B/C/D/E/F/G/H/I/J/L/O/P/Q/S/U 佳能RT模式(Canon ZigBee)——ON / OFF (ID: 00 ~ 99)		
锂电池 Lithium Battery / 续航 Capacity	DC 7.4V 2500mAh / 全光 Full ≈ 500次	
电池寿命Battery Life 300次完全充放电 (电池容量约80%) 300 Charge Cycles(To 80% Capacity Left)		
自定义休眠时间设定(自动关机时间同步关联)	OFF, 5/15/30 分钟 (minute)	
蜂鸣 Buzz / 对焦辅助 AF Focus / 固件更新 Firmware Upgrades	支持 Support	
尺寸 Dimensions / 重量 Weight 195(L)x75(W)x65(H)mm / 460g(不含电池 Without Battery)		

标准配件 Standard accessories



DC 7.4V 2500mAh
锂电池Li-Ion Battery



灯头保护套
Protection Package



冷靴支架
Cold Shoe Holder



DC5V 3A充电头
Charging Head



电池充电底座
Charging Base



Type-C数据线
Data Line

拍摄案例 Photography case



Hi5 复古机顶灯

Hi5 HSS Retro Speedlite

Speedlight

高速
机顶灯

23



规格参数 Parameters

型号 Type/ 编码 Code	Hi5 / 1.02.011716 (灰) 1.02.011716-1 (红) 1.02.011716-2 (粉)
功率 power / GN指数	26Ws / GN16
回电时间 Recycling time	0.02-1.6s
调光范围 Output range	7档F-stop(1 / 1-1 / 64)
闪光持续时间T 0.5 Flash duration	1 / 3000-49000s
色温 Color temperature	6000 ±200K
闪光模式 Flash Mode	M手动模式 / A自动模式 / S1从机光敏模式 / S2从机光敏模式 Cell Sensor Mode 1&2
电池容量 Battery volumn	3.7V 2500mAh锂电池 (Lithium)
续航 Endurance	全光 (Full power) > 650次
充电时长 Charging time	5V 2A Max. / 75分钟 min / Tpye-C
电量显示 Battery indicator	打开并拨动到OFF位置后闪光测试按钮指示灯闪烁次数 ((The number of twinkle time in TEST button indicates) (1次0-25% / 2次25%-50% / 3次50%-75% / 4次75%-100%)
休眠 Sleep mode	无操作后3分钟 (3 minutes after no operation)
标配附件 Accessory	柔光罩 diffuser
尺寸 Dimensions(mm)/ 重量 Weight	90(L)x55(W)x75(H) / 215g

产品特点 Features

金贝 Hi5 新复古机顶闪光灯轻巧便携单触点设计兼容各品牌微单热靴相机体积小巧功能齐全。采用仪表转轴设计原理把 ISO、光圈距离融为一体，在 M 手动模式下灵活转动可解读拍摄参数带来的即兴乐趣，在 A 档模式下与相机自动档同步闪光捕捉稍纵即逝的创意影像。Hi5 新能源锂电池设计，闪光指数 GN16，0.02 ~ 1.6s 快速回电，可高速连拍，全功率闪光大于 650 次。经典复古的造型及快捷操控满足旅行拍摄、亲友聚会、记录儿童成长，迷上你、陪伴你人生的精彩瞬间。

Jinbei Hi5 retro speedlite is a portable battery speedlite. By using single-pin hot-shoe design, it's compatible with various brands of cameras. The instrument axis design integrates the ISO, aperture and distance. In M manual mode, flexibly rotates the axis to match camera's shooting data to feel the fun of manual mechanical shooting. In Auto mode, set the camera to P or Auto mode to capture fleeting creative images. Hi5 uses lithium battery, guide number 16, 0.02 ~ 1.6s fast recycling time, high-speed continuous shooting, full power flash more than 650 times.



机顶灯 选购附件

Speedlight Optional Accessory

Speedlight

高速
机顶灯

24



HD-2磁吸柔光球
Diffuse ball
1.08.012205



HD-2MAX灯头反光板
Bounce card
1.08.901015



HD-2 色片蜂窝网套装
Accessory set
1.08.012207



HD机顶灯磁吸反光罩
Magnetic reflector
1.08.012303



Hi900柔光盒
Soft box
1.08.012302



Hi900附件转接环
Adapter ring
1.08.012301



ET-2附件转接支架
Bowens adapter
3.09.011101



A-2热靴支架
Hotshoe adapter
#3.09.011108



S-32-33"柔光伞
Diffuser umbrella
3.10.011101



40"黑银反光伞
Silver umbrella
3.10.021201



phi65深抛柔光箱/格栅
Deep softbox/Grid
1.07.081131 # 1.07.041226



MH色片灯罩
Magnetic reflector with gels
1.08.011705



HD-2反光板
Reflector
1.08.012204



MK-9相机云台
Camera head
3.09.011303



EQ-190摄影灯架
Steel stand
1.09.031501-1



EQ-220便携摄影灯架
Steel stand
1.09.031504

TR-Q7II/TR-Q6II 复合热靴引闪器

Integrated Hot-shoe Flash Trigger

Flash Trigger

引闪器

25



复合热靴
Integrated Hot-shoe



索尼专用热靴
SONY Hot-shoe



复合热靴
Integrated Hot-shoe



索尼专用热靴
SONY Hot-shoe

TR-Q7II复合热靴/TR-Q7II(S)索尼热靴

产品特点 Features

复合热靴设计兼容佳能, 尼康, 富士, 松下等, 解决了一台引闪器可适配多品牌相机, 选配索尼热靴转换器可配索尼相机减少用户使用成本。人性化设计三段式可视角度调节。内置锂电池续航连续触发闪光大于 10 万次, 发射功率高, 提升抗干扰性能, 解决频繁更换电池烦恼满足高强度连续拍摄。LCD 大屏操作智能便捷, 2.4GHz 频率发射距离可达 100M, 多频道控制, 信号稳定, 可远距离触发金贝系列闪光灯和机顶闪光灯。内置蓝牙支持苹果、安卓手机, APP 智能无线遥控。全面支持 TTL 自动闪光、手动闪光、1/8000s 高速同步、曝光补偿、闪光灯焦段、造型灯光控制, 分频分组等功能。支持 OTA 固件在线升级。引闪由我, 创意无限。

Integrated hot-shoe design makes it easily work with multiple camera brands, such as, Canon, Nikon, Fujifilm, Panasonic, Olympus. Sony hot-shoe version and Sony adapter are optional.

Adjustable angle design makes it more users friendly. The chargeable built-in Li-ion battery supports up to trigger 100,000 flashes with high anti-interference ability. 2.0" colorful LCD display creates more convenient operation. 2.4GHz covers the range up to 100 meters. Channel and Group matches wireless system built-in Jinbei's flash and speedlite. Jinbei App (Android and iOS) controls the trigger via Bluetooth.

Main functions includes TTL, Manual, HSS(up to 1/8000s), EV exposure, Zoom, etc. Type-C and OTA are both support for firmware updating.

规格参数 Parameters

型号 Type	TR-Q7II/TR-Q7II(S)
编码 Code	1.06.021612/1.06.021613
无线频率 Wireless Frequency / 发射距离 Range	2.4GHz / ≥100m
CH频道 Channel: 01-32	GR组别 Group: A/B/C/D/E/F
拍摄模式 Shooting Mode	TTL自动模式 (Auto) /M手动模式 Manual
闪光模式 SYNC	前帘 Front curtain SYNC/后帘 Rear curtain SYNC/高速同步 HSS
标准闪光同步速度Standard shutter speed	Nikon<1/320s, Canon / Sony / Fuji<1/250s
蓝牙 Bluetooth	支持 Support
锂电池规格 Lithium battery	DC3.8V 1500mAh
续航时间 Capacity	连续遥控触发闪光10万次以上 Continuously trigger for over 100,000 times
尺寸 Dimensions(LxWxH)	106x65x24mm
重量Weight	120g

TR-Q6II复合热靴/TR-Q6II(S)索尼热靴

产品特点 Features

复合热靴设计高速引闪器兼容佳能, 尼康, 富士, 松下等, 解决了一台引闪器可适配多品牌相机, 选配索尼热靴转换器可配索尼相机减少用户使用成本。LCD 屏操作智能便捷, 2.4GHz 频率发射距离可达 100M, 多频道控制, 信号稳定, 抗干扰性强, 可远距离触发金贝系列闪光灯和机顶闪光灯。内置蓝牙支持苹果、安卓手机, APP 智能无线遥控。全面支持 TTL 自动闪光、手动闪光、1/8000s 高速同步、曝光补偿、闪光灯焦段、造型灯光控制, 分频分组独立调节等功能。支持 OTA 固件在线升级。可用上热靴打通金贝系统无线功能, 实现和其它品牌机顶灯闪光同步离机引闪。引闪由我, 创意无限。

Integrated hot-shoe design makes it easily work with multiple camera brands, such as, Canon, Nikon, Fujifilm, Panasonic, Olympus. Sony hot-shoe version and Sony adapter are optional.

Adjustable angle design makes it more users friendly. LCD display creates more convenient operation. 2.4GHz covers the range up to 100 meters. Channel and Group matches wireless system built-in Jinbei's flash and speedlite. Jinbei App (Android and iOS) controls the trigger via Bluetooth.

Main functions includes TTL, Manual, HSS(up to 1/8000s), EV exposure, Zoom, etc. OTA is supported for firmware updating.

Upper single-pin hot-shoe brings other brands' flash into Jinbei wireless system.

规格参数 Parameters

型号 Type	TR-Q6II/TR-Q6II(S)
编码 Code	1.06.021614/1.06.021615
无线频率 Wireless Frequency / 发射距离 Range	2.4GHz / ≥100m
CH频道 Channel: 01-31	GR组别 Group: A-F(APP:A-U)
无线模式 Wireless Mode	主控模式 Master mode /从属模式 Slave mode
拍摄模式 Shooting Mode	TTL自动 Auto(±3.0)/M手动模式 Manual(1.0-9.0)
闪光模式 SYNC	前帘同步 Front curtain / 后帘同步 Rear curtain / 高速同步 HSS / 定格模式 Fre
标准闪光同步速度Standard shutter speed	Nikon<1/320s, Canon / Sony / Fuji<1/250s
蓝牙 Bluetooth	支持 Support
供电方式 Power supply mode	DC 1.5V AA 5号电池 battery x 2
固件更新 Firmware upgrades	使用手机APP通过OTA固件升级OTA to upgrade firmware
蜂鸣 Buzz / 造型灯 Modeling light	支持 Support
2.5mm同步口	通过2.5mm同步插孔控制相机拍摄
2.5mm SYNC slot	Control camera shutter through a 2.5mm jack
灯头变焦设置 Zoom set	AU / 24 / 28 / 35 / 50 / 70 / 80 / 105 / 200
尺寸 Dimensions(LxWxH)	76x68x53mm
重量Weight	100g(不含电池 Without Battery)

TR-V6II 通用热靴引闪器

Universal Hot-shoe Flash Trigger



TR-V6II 通用型分组分频引闪器

Universal hot shoe, compatible with multi camera brands

产品特点 Features

通用型金属热靴底座可兼容多品牌单反微单相机，高清 LCD 显示屏分频分组独立调节，调光范围广 9 档调光 /0.1 级微调，2.4GHz 频率，抗干扰性强发射距离 >100 米。适用于金贝内置无线闪光灯、机顶闪光灯系列。广泛适用于婚纱摄影棚、电商摄影棚、摄影工作室摄影创作。

The universal hot shoe design makes it easily work with multiple camera brands. LCD display creates more convenient operation. Flash power adjustable for 9 F-stop with 0.1 each. 2.4GHz covers the range up to 100 meters. Channel and Group matches wireless system built-in Jinbei's flash and speedlite for photography of wedding, e-commerce and professional studios.

规格参数 Parameters

型号 Type	TR-V6II
编码 Code	1.06.021702-1
无线频率 Wireless Frequency / 发射距离 Range	2.4GHz / ≥100m
CH频道 Channel: 00-31 GR组别 Group: A/B/C/D/E/F/G/H/I/J/L/O/P/Q/S/U	
拍摄模式 Shooting Mode	M手动模式 Manual
闪光模式 SYNC	前帘 Front curtain SYNC
标准闪光同步速度 Standard shutter speed	Nikon <1/320s, Canon / Sony / Fuji <1/250s
蜂鸣 Buzz / 造型灯 Modeling light	支持 Support
供电方式 Power supply mode	DC 1.5V AAA 7号电池 battery x 2
续航时间 Capacity	>110小时 Hours
自动关机 Automatic shutdown	10分钟无任何操作自动关机 Automatic shutdown without any operation for 10minutes
尺寸 Dimensions(LxWxH)	70x49x42mm
重量 Weight	800g

Flash Trigger

引闪器

26



TRS-V通用型引闪器

Universal flash trigger

#1.06.031702

产品特点 Features

通用型金属热靴底座可兼容多品牌单反微单相机，2.4GHz 无线引闪，1/250s 标准闪光同步，兼容多品牌相机，多频道独立工作。抗干扰性强发射距离 >100 米。适用于金贝内置无线影室闪光灯、机顶闪光灯系列。选配 TR-RV 无线接收器，可适配市面上多品牌影室闪光灯。广泛适用于婚纱摄影棚、电商摄影棚、摄影工作室摄影创作。

The universal hot shoe design makes it easily work with multiple camera brands under a standard shutter sync up to 1/250s.

2.4GHz covers the range up to 100 meters. Channel and Group matches wireless system built-in Jinbei's flash and speedlite for photography of wedding, e-commerce and professional studios. By pairing with Jinbei TR-RV receiver, other brands' flash can bring into Jinbei wireless system.



TR-RV无线接收器

Wireless receiver

#1.06.031706

产品特点 Features

通用型分频分组无线引闪接收器，适用于 $\phi 3.5\text{mm}$ 同步插口影室闪光灯，解决同一摄影棚不同品牌影室闪光灯同时使用。2.4GHz 无线接收，1/250s 标准闪光同步，抗干扰性强接收距离 >100 米。内置锂电池，可长时间接收闪光触发。支持 Type-C/ 充电宝充电随用随充。可适配金贝各型号引闪器兼容使用。解决市面上多品牌影室闪光灯同步引闪。广泛适用于婚纱摄影棚、电商摄影棚、摄影工作室摄影创作。

It is a universal 3.5mm flash trigger receiver that is compatible with any flash has a 3.5mm trigger jack.

It works on 2.4GHz with the range covering up to 100 meters and support the standard shutter sync up to 1/250s. The built-in Li-ion battery supports continuous long time work, and it can be charged via USB-C slot.

TR-A3/A9 交流供电通用引闪器

Ac Powered Universal Flash Trigger

Flash Trigger

引闪器

27



TR-A3/TR-A9无线引闪器套装

Wireless trigger set

产品特点 Features

影室闪光灯通用热靴引闪器兼容多品牌相机, $\phi 3.5\text{mm}$ 同步插头交流供电接收器降低使用成本, 2.4GHz 无线引闪抗干扰性强, 100M 远距离无线引闪触发, 支持 1/250s 标准闪光同步, 多频道独立工作互不干扰。兼容多品牌影室闪光灯同步闪光。广泛适用于婚纱摄影棚、电商摄影棚、摄影工作室摄影创作。

The universal AC powered flash trigger transmitter and receiver set is designed for compatibility. The universal hot shoe trigger can work with multi camera brands cameras, and the 3.5mm AC powered receiver is made for many other flashes with no wireless built-in.

The set works on 2.4GHz with the range covering up to 100 meters, and supports the standard shutter sync up to 1/250s.

It is perfect working with studio flashes and hot shoe flashes of many brands and for photography of wedding, e-commerce and professional studios.

规格参数 Parameters

型号 Type	TR-A3	TR-A9
编码 Code	1.06.014003	1.06.011901
无线频率 Wireless Frequency / 引闪距离 Range	2.4GHz / $\geq 100\text{m}$	
通道数量 Channels	4	16
同步速度 SYNC speed	1/250s	
发射器电源 Power Source	CR2032 3V 电池 (Battery)	
接收器电源 Power Source	AC195~245V 50/60Hz	

拍摄案例 Photography case



金贝标准三爪卡口反光罩/附件

Jinbei Standard Mount Reflector / Accessory

Photographic Accessories
摄影附件

28



14cm外拍便携反光罩

14cm magnetic reflector with gels

#1.08.011704 ϕ 14cm H:8.5cm

亮度高小巧便携，工程塑料外壳强度高，可配外拍闪光灯、机顶闪光灯，磁吸色片，光效多变，渲染柔化光线轮廓，提升画面感。

High reflection, compact and super portable with strong structure. Works with outdoor flashes and speedlite. Color gels to create a rich light environment and soft light effects.

标配 ST:




白/黄/红/蓝/绿 磁吸色片各×1
Diffuser/yellow/red/blue/green color gel x 1

选配 Optional:



蜂窝网(含支架)
Honey comb with holder
#1.08.031504



金贝标准卡口

Jinbei Standard Mount



MH色片灯罩

MH magnetic reflector with gels

#1.08.011705 ϕ 9.3cm H:10.6cm

磁吸式锁扣，色纸变化多，亮度高小巧便携，工程塑料外壳强度高，可配外拍闪光灯、机顶闪光灯，渲染柔化光线轮廓，提升画面感。

Magnetic connector, high reflection, compact and super portable with strong structure. Works with outdoor flashes and speedlite. Color gels to create a rich light environment and soft light effects.

标配 ST:



柔光/黄/红/蓝/绿/CTO色纸各×1

Diffuser/yellow/red/blue/green/CTO gel x 1



55°便携反光罩

55°portable reflector

ϕ 18cm H:12cm


#1.08.011401

55°照射角度 Beam

亮度高光质硬，橘皮银色反光层，交叉反射均匀，层次感丰富，立体感强，配有插伞孔，可配便携蜂窝网，满足摄影棚便携外拍。

Textured silver reflection providing high and hard light, even cross-reflecting and texture, making the shooting subject stereoscopic. An umbrella insert also compatible with honey comb sets.

选配 Optional:



55°便携反光罩蜂窝网套装
55°portable reflector honey comb set
#1.08.031101



45°长焦反光罩

45° telephoto reflector

ϕ 28cm H:34.5cm

#1.08.011601

45°照射角度 Beam

照射角度 45°，圆点高光，强力耀光，阴影明显轮廓柔和，层次感丰富。适配旗板、柔光屏、硫酸纸、蜂窝网。适用于广告人像、艺术写真、产品静物等专业拍摄需求。

45-degree telephoto reflector providing a round-spot high light for an efficient exposure, high on the light ratio yet soft on the outline and rich textures.

It can work with diffuser flag, diffuser board, diffuser papers and honey comb. It is suitable for commercial portrait, art photography, still life or other professional applications.

选配 Optional:



S15° 蜂窝网
Honey comb

#1.08.031402



M30° 蜂窝网
Honey comb

#1.08.031402



55°标准反光罩

55°standard reflector

ϕ 20cm H:15cm

#1.08.011201

55°照射角度 Beam

亮度高光质硬，橘皮银色反光层，交叉反射均匀，层次感丰富，立体感强，轮廓光清晰，可配 JB-A 附件蜂窝网控制光照方向提高光比反差。适配旗板、柔光屏、硫酸纸，满足不同专业摄影需求。

Textured silver reflection providing high and hard light, even cross-reflecting and texture, making the shooting subject stereoscopic. It is compatible with JB-A honey comb sets for a precise light direction and provide a high light ration. It can also work with other light-softening accessories for professional applications.

选配 Optional:



JB-A标准罩附件套装
JB-A accessory set
#1.08.051101



S15° 蜂窝网
Honey comb
#1.08.031202



M30° 蜂窝网
Honey comb
#1.08.031201



M9专业反光罩

Professional reflector

ϕ 24cm H:19.5cm

#1.08.011202

70°照射角度 Beam

大直径深口设计送光远，强度高，光照均匀，反光罩内进行多次交叉反射，光线均匀且层次丰富，增强立体感，27mm 导光槽，精准控光光线饱和度高，轮廓清晰。适配旗板、柔光屏、硫酸纸、挡光板、蜂窝网。

With its 24cm parameter and 19cm depth design, this reflector transmits the long-range, high-intensity and even light. After multiple cross-reflecting inside the reflector, the light is even, rich in texture and enhances the vividness of the scene. With the 27mm light guide, it can precisely control the light orientation. It can also work with diffuser flag, diffuser board, diffuser papers and honey comb that make it perfect for commercial portrait, art photography, still life or other professional applications.




M-9四页挡板套装
Reflector barndoor
#1.08.031603


M-9专业反光罩蜂窝网
Honey comb



10° 蜂窝网
1.08.031604



30° 蜂窝网
1.08.031602



60° 蜂窝网
1.08.031601

束光筒/反光罩/聚光筒

Focusing snoot / Reflector / Spot Snoot

Photographic Accessories
摄影附件

29



MII-束光筒 (两个口径蜂窝网)

Conical snoot

#1.08.041102

φ8cm φ6.2cm H:25cm

束光筒简称猪嘴，锥形约束光线缩小照射范围，加蜂窝网格产生平行光使光型明暗反差强，更好的拍摄人物、静物产品局部形状的轮廓。光线质感强适用于人像发丝光，低调人像局部用光。产品拍摄明暗质感表现力强，阴影清晰，细节锐度高。

The conical snoot creates more concentrate light. With the honey comb, light orientation improved an enhanced light ratio and make it perfect for outlining the portrait, still light or more. It can be used to highlight the hair, or specific zones with it for more contrast, light and shade ratio and sharpness.



斜口背景罩

Background Reflector

#1.08.011801

φ30cm φ18cm

70°照射角度 Beam

斜口式设计椭圆形光束，产生渐变光效果，适用于渐变背景光，发型光和轮廓光，可选配柔光纸、色片纸渲染不同的光影效果，广泛应用艺术人像、静物产品专业拍摄。

The background reflector delivers a gradient light that is perfect for lighting the background, the hair or outline.

It can work with diffuser, color gels for rich light effects and is suitable for art portrait photography, still life or other professional shootings.



QZ-40雷达反光罩 (银色)

QZ-40 beauty dish

#1.08.011901

φ40cm H:14cm



QZ-50雷达反光罩 (白色)

QZ-50 beauty dish

#1.08.012001

φ50cm H:20cm

选配 Optional:

QZ-41雷达罩蜂窝网
φ40cm H:16mm

#1.08.031501

QZ-51雷达罩蜂窝网
φ50cm H:16mm

#1.08.031502

雷达反光罩又称美人蝶光线，通过二次反射光线扩散均匀，光质硬中带柔层次感丰富。搭配蜂窝网方向性更强，轮廓光清晰，阴影更加自然。人像拍摄肤色靓丽，轮廓光立体感强，发丝光锐度高，广泛适用于艺术人像、专业产品拍摄。

The beauty dish creates an even the light by dual reflection. The light is softened and rich in texture. With honey comb grid it delivered an oriental light that highlight the outline, makes the shades more natural. It is perfect for portrait photography by providing beautiful skin tone, stereoscopic effects and sharpness. It is also suitable for other professional shooting scenes.



QZ-50-1可换卡口式雷达反光罩 (银色)

mount replaceable beauty dish

#1.08.012002

φ40cm H:14cm



DPφ6聚光筒

Spot snoot

#1.08.041303

H: 22.8cm

闪光灯调焦聚光筒选用专业光学凹凸镜，65mm 口径，调焦伸缩可达150mm，可灵活更换各种艺术造型片和滤色片，形色合一满足光影变幻，图案和色彩随意掌控。广泛适用背景特效、人物、产品拍摄艺术造型，满足专业摄影创作光影虚实艺术效果。

The 65cm parameter spot snoot is equipped with professional optical lenses providing n 150mm zooming. It can also work with color gels or gobos for rich effects. It is perfect for creating art background, portrait shooting, product photography.

标配 ST:



镜头保护套
Lens protective bag




红/黄/蓝/绿/橙滤色片各1
Red/yellow/blue/green/OTC
color gel 1 pcs each



圆形卡盘
Gobo holder



圆形卡盘
Gobo*8

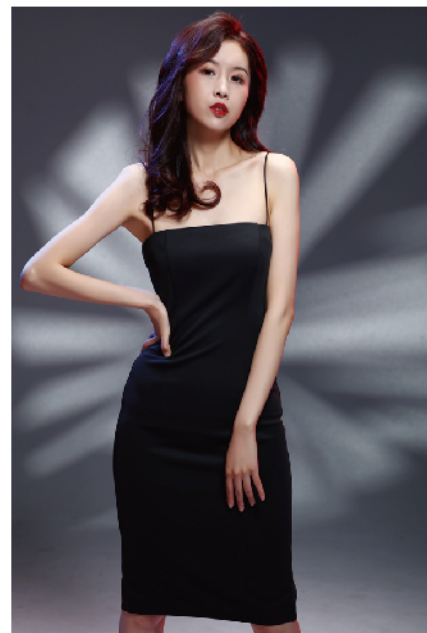

M系列 普及型柔光箱

M Softbox

Photographic Accessories
摄影附件

30

柔光箱的作用是将点光源转变为面光源，使光质柔和，容易控制光线照射位置，明暗过渡有层次产生立体感。柔光箱不同的尺寸大小决定了光照范围通过距离来控制光的软硬程度。通常八角柔光箱作主光和顶光，方形柔光箱作辅光和底光，长条柔光箱作轮廓光。

The role of the soft box is to transform the point light source into a surface light source, so that the light quality is soft, it is easy to control the position of the light irradiation, and the transition of light and dark has a three-dimensional sense. The different sizes of the soft box determine the light range through the distance to control the soft and hard degree of light. Usually the octagonal soft box is the main light and top light, the square soft box is the auxiliary light and the bottom light, and the long soft box is the outline light.



柔光箱 softbox

尺寸 Dimensions: 60x60/60x90/70x100/80x120/70x140cm


M-60x60 #1.07.031101	M-60x90 #1.07.031102
M-70x100 #1.07.031103	M-80x120 #1.07.031105
M-70x140 #1.07.031106	



八角柔光箱 Octagonal softbox

尺寸 Dimensions: $\phi 95/\phi 120/\phi 140$ cm

M-950 #1.07.031107 M-1200 #1.07.031109 M-1400 #1.07.031108

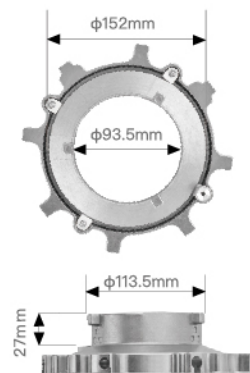

弧形骨架设计

Curved frame design

专业的弧形骨架设计，光线均匀、柔和、色彩饱和度高、光质细腻。Professional curved skeleton design, uniform light, soft, high color saturation, delicate light quality.



橘皮压花反光面料

Orange peel embossed reflective fabric

反光均匀保证光线在内部交叉反射达到均匀的出光效果。银色面料涂层不掉落。Uniform reflection ensures that the light is cross-reflected in the interior to achieve a uniform light effect. Silver fabric coating does not drop.

Uniform reflection ensures that the light is cross-reflected in the interior to achieve a uniform light effect. Silver fabric coating does not drop.



双层柔光布


Double soft cloth

内层柔光布形成二次反射，使柔光箱光照均匀，中心于四角的光比小于 0.5 级光圈。The inner layer of soft light cloth forms a secondary reflection, so that the light of the soft light box is uniform, and the light ratio in the center of the four corners is less than 0.5 aperture.

The inner layer of soft light cloth forms a secondary reflection, so that the light of the soft light box is uniform, and the light ratio in the center of the four corners is less than 0.5 aperture.

DM系列 柔光箱

DM Softbox

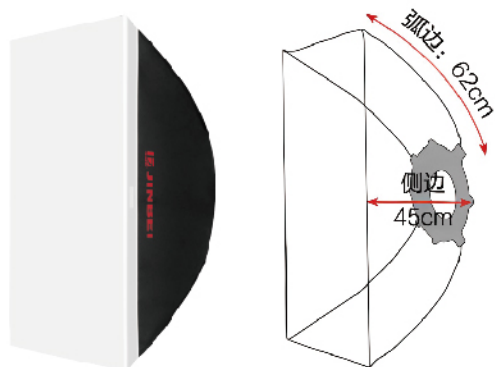


DM-60x90 柔光箱 Softbox

#1.07.021107 60x90cm



DM-90 八角柔光箱 Octagonal softbox

#1.07.021106 $\phi 90$ cm



KE系列 深口柔光箱-盘杆一体快速安装

KE Deep Quick Open Softbox


Photographic Accessories
摄影附件

31



KE-60x90
专业柔光箱/柔光箱格栅
Softbox/Grid
#1.07.051115 #1.07.051201
尺寸 Dimensions: 60x90cm

KE-70x100
专业柔光箱/柔光箱格栅
Softbox/Grid
#1.07.051116 #1.07.051202
70x100cm

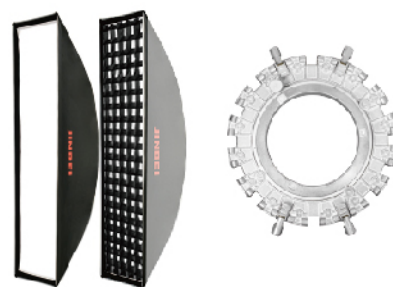


KE-25x100
专业格栅柔光箱
Softbox with Grid
#1.07.051112
25x100cm

KE-35x140
专业格栅柔光箱
Softbox with Grid
#1.07.051113
35x140cm




KE-40x180
专业格栅柔光箱
Softbox with Grid
#1.07.051114
40x180cm

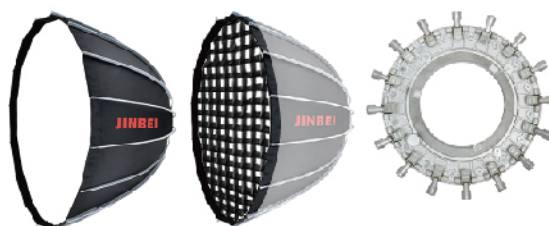


KE-90
深口柔光箱/柔光箱格栅
Softbox/Grid
#1.07.051120 #1.07.051205
尺寸 Dimensions: φ90cm

KE-120
深口柔光箱/柔光箱格栅
Softbox/Grid
#1.07.051121 #1.07.051206
φ120cm

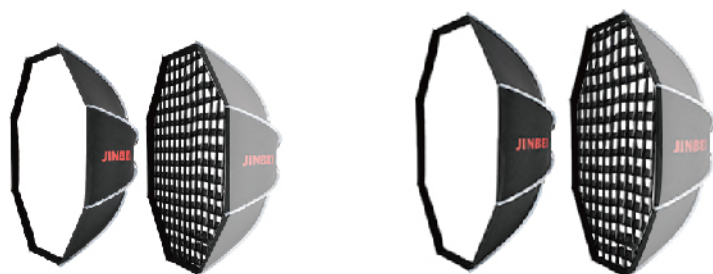

KE-100专业八角柔光箱/柔光箱格栅
Octagonal softbox/Grid
#1.07.051118 #1.07.051203
φ100cm

KE-120专业八角柔光箱/柔光箱格栅
Octagonal softbox/Grid
#1.07.051117 #1.07.051207
φ120cm

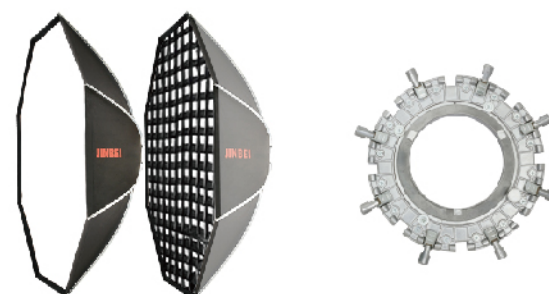

KE-150专业八角柔光箱/柔光箱格栅
Octagonal softbox/Grid
#1.07.051119 #1.07.051204
φ150cm

型号	高度	宽度	深度	弧边	收合高度
KE-60x90	90cm	60cm	47.5cm	65cm	72cm
KE-70x100	100cm	70cm	45.5cm	70cm	74cm
KE-25x100	100cm	25cm	40.5cm	55cm	58cm
KE-35x140	140cm	35cm	48cm	81cm	84cm
KE-40x180	180cm	40cm	58.5cm	100cm	90cm


型号	直径	深度	弧边	收合高度	导光槽
KE-90	φ90cm	62cm	70cm	76cm	5cm
KE-120	φ120cm	72cm	86cm	92cm	5cm
KE-100	φ100cm	47cm	60cm	65cm	5cm
KE-120	φ120cm	45cm	65cm	72cm	5cm
KE-150	φ150cm	56cm	82cm	90cm	5cm

65/85/105cm深抛柔光箱

Deep Beauty Dish Softbox

深口抛物线柔光箱采用抛物线设计深度大，光线交叉密度均匀层次感丰富，定向控光，明暗清晰，送光距离远。格栅具有约束光线、平行送光，光线隔离更清晰使立体感更强。KE专业柔光箱采用快装卡盘设计，选用专业反光布和柔光面料，装拆收合更便捷。满足人像摄影、直播视频专业要求。

Deep polishing soft box adopts parabola design depth, light cross density uniform layer sense rich, directional light control, clear light and dark, long light sending distance. The grille has a constraint light, parallel light transmission, clearer light isolation and stronger three-dimensional sense. KE professional soft box adopts quick loading chuck design, selection of professional reflective cloth and soft fabric, assembly and disassembly more convenient. Meet the professional requirements of portrait photography and live video.

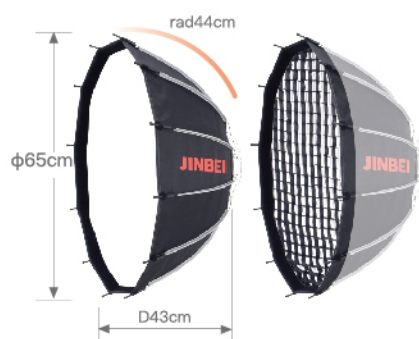

65CM深抛柔光箱/柔光箱格栅

Soft/Grid

#1.07.081131 #1.07.041226

φ65cm rad44cm D43cm




85CM深抛柔光箱/柔光箱格栅

Soft/Grid

#1.07.081132 #1.07.041227

φ85cm rad58cm D51cm

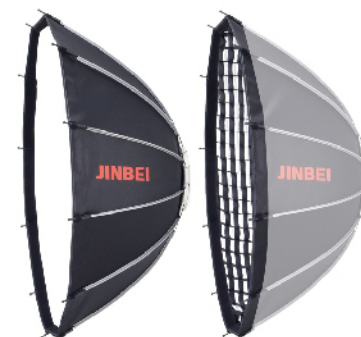

105CM深抛柔光箱/柔光箱格栅

Soft/Grid


#1.07.081130 #1.07.041228

φ105cm rad63.5cm D52cm



球型柔光罩

Quick Ball Softbox



φ56球型柔光罩

Quick ball softbox

φ51cm D43.5cm

#1.08.021110

φ65球型柔光罩

Quick ball softbox

φ65cm D56cm

#1.08.021103

φ85球型柔光罩

Quick ball softbox

φ85cm D72cm

#1.08.021104



φ100球型柔光罩

Quick ball softbox

φ100cm D67cm

#1.08.021106

φ120球型柔光罩 (含遮光布)

Quick ball softbox

φ120cm D81.5cm

#1.08.021107



φ100柔光罩遮光布

Light control skirt for
100cm quick ball softbox

#1.08.051204



深口直反射 柔光箱

Deep Reflective Softbox

Photographic Accessories
摄影附件

33



φ90深口直反射柔光箱
(含格栅)

φ90cm Deep Reflective
Softbox (with Grid)
#1.07.081123
φ90cm



φ90深口直反射柔光箱
格栅

φ90cm Deep Reflective
Softbox Grid
φ90cm


深口直反射柔光箱具有直射柔光箱又有反射伞的作用，送光距离远，光效面积大，一般用于主光、填充光、平行及动态抓拍。

Deep reflection soft box has the function of direct soft box and reflective umbrella, the light sending distance is far, the light effect area is large, and it is generally used for main light, fill light, parallel and dynamic capturing.



φ120深口直反射柔光箱
(含格栅)

φ120cm Deep Reflective
Softbox (with Grid)
#1.07.081124
φ120cm



φ120深口直反射柔光箱
格栅

φ120cm Deep Reflective
Softbox Grid
φ120cm



φ90/φ120深口直反射柔光箱
——反射应用

Application

φ90cm/φ120cm
(选配深口柔光箱反射应用套件)
(Optional zoom focusing system)



φ140深口直反射柔光箱
(含格栅)

φ140cm Deep Reflective
Softbox (with Grid)
#1.07.081125
φ140cm



φ140深口直反射柔光箱
格栅

φ140cm Deep Reflective
Softbox Grid
φ140cm



φ140深口直反射柔光箱
——反射应用

Application

尺寸 Dimensions: φ140cm
(标配深口柔光箱反射应用套件)
(With zoom focusing system)



深口柔光箱反射应用套件


Zoom focusing system

#1.07.081127

TD-180 深口抛物线太阳伞

TD-180 Deep Parabolic Umbrella

#3.10.041402

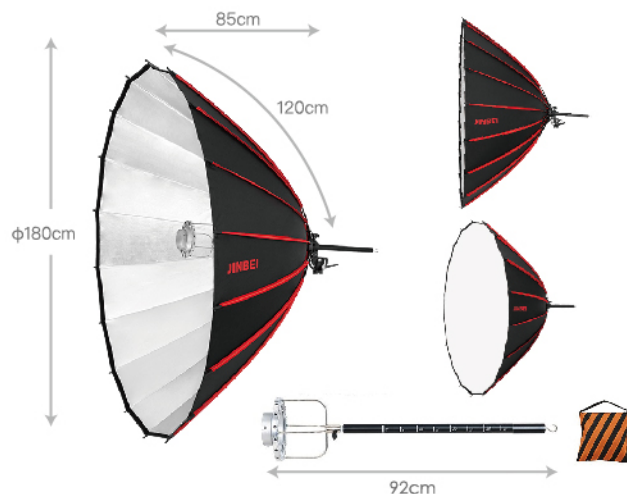

专业旗板/柔光屏

Professional Frame Scrim Diffuser/Folding Frame Scrim Diffuser

Photographic Accessories
摄影附件

34



HD-15x21中型柔光屏
Folding frame scrim diffuser

#3.11.031401
尺寸 Dimensions: 150x210cm

适用灯架
Recommend for:
CK-1/CK-2/JF-238A灯架



HD-240 中型柔光屏/HD-300 大型柔光屏
Folding frame scrim diffuser

#3.11.031402 #3.11.031403
240x240cm / 300x300cm

适用灯架 Recommend for:
CK-1/CK-2/JF-238A
MF-3000F/JB-4200
M-8重型影视两用灯架



LH-75x90不锈钢旗板
Frame scrim diffuser

#3.11.031501 75x90cm

LH-75x90黑色旗板吸光布
Black cloth

#3.11.031506

推荐配置 Recommended:
CK-1/CK-2/JF-238A灯架
JB11-038A多功能圆饼夹
CK-2圆饼夹/CK横杠

旗板、柔光屏光线均匀柔和、光比大层次丰富、质感强。可选配吸光布，提升立体感。

灯与被摄物之间灵活调节距离，起到光线柔硬的作用。通常配合反光灯罩，灵活控光满足不同人像产品拍摄专业要求。

Flag plate, soft light screen light is uniform and soft, light is rich in layers and strong texture. Optional light absorbing cloth, enhance the three-dimensional sense.

The distance between the lamp and the subject is flexibly adjusted to play the role of soft and hard light. Usually with reflective lampshade, flexible light control to meet the professional requirements of different portrait products.

DH-140小滑轮直播灯架

Light stand with wheel

#1.09.031308

- Ⓐ 1400mm
- Ⓑ 510mm
- Ⓒ 510mm
- Ⓓ $\phi 16/20/24/28$
- Ⓔ 680mm
- Ⓕ 3Kg
- Ⓖ 1.3Kg



L-2000A/2400A折叠铝灯架

Folding stand

#1.09.031301 #1.09.031302

- Ⓐ 2150mm
- Ⓑ 500mm
- Ⓒ 500mm
- Ⓓ $\phi 13/16/19/22/25$
- Ⓔ 640mm
- Ⓕ 3Kg
- Ⓖ 1.0Kg
- Ⓐ 2200mm
- Ⓑ 560mm
- Ⓒ 575mm
- Ⓓ $\phi 19/22/26/29.5$
- Ⓔ 760mm
- Ⓕ 4.5Kg
- Ⓖ 1.54Kg



EQ-3双头冷靴+摄影灯架套装

Double cold boots + stand set

EQ-3双头冷靴手机夹
#3.09.011204

EQ-190摄影灯架
#1.09.031501-1

EQ-3灯架袋
#1.12.011303



EQ-190摄影灯架

Steel stand

#1.09.031501-1

- Ⓐ 2000mm
- Ⓑ 730mm
- Ⓒ 705mm
- Ⓓ $\phi 19/22/25$
- Ⓔ 880mm
- Ⓕ 3.5Kg
- Ⓖ 0.9Kg



EQ-200便携摄影灯架

Aluminium stand

#1.09.031503

- Ⓐ 2100mm
- Ⓑ 820mm
- Ⓒ 690mm
- Ⓓ $\phi 16/19/22$
- Ⓔ 800mm
- Ⓕ 4Kg
- Ⓖ 1.25Kg



EQ-220便携摄影灯架

Aluminium stand

#1.09.031504

- Ⓐ 2200mm
- Ⓑ 890mm
- Ⓒ 780mm
- Ⓓ $\phi 19/22.5/25$
- Ⓔ 1020mm
- Ⓕ 4.5Kg
- Ⓖ 1.5Kg



EQ-250摄影灯架(钢管)

Steel stand

#1.09.031506

- Ⓐ 2500mm
- Ⓑ 1050mm
- Ⓒ 870mm
- Ⓓ $\phi 22/25/30$
- Ⓔ 1100mm
- Ⓕ 5Kg
- Ⓖ 1.95Kg



JB-280摄影灯架(钢管)

Steel stand

#1.09.041203

- Ⓐ 2800mm
- Ⓑ 1140mm
- Ⓒ 955mm
- Ⓓ $\phi 25/30/35$
- Ⓔ 1200mm
- Ⓕ 6Kg
- Ⓖ 2.3Kg



JB-300型铝灯架

Aluminium stand

#1.09.041301

- Ⓐ 3000mm
- Ⓑ 1200mm
- Ⓒ 1040mm
- Ⓓ $\phi 25/30/35$
- Ⓔ 1200mm
- Ⓕ 7Kg
- Ⓖ 2.3Kg



专业气垫铝灯架

Air Cushion Aluminum Light Stand

Photographic Accessories
摄影附件

36

MZ-2400专业气垫铝灯架
Air-cushion aluminium stand
#1.09.041701

- Ⓐ 2400mm
- Ⓑ 1050mm
- Ⓒ 890mm
- Ⓓ $\phi 20/25/30$
- Ⓔ $\phi 22mm$
- Ⓕ 1040mm
- Ⓖ 6Kg
- Ⓗ 1.9Kg

MZ-3000专业气垫铝灯架
Air-cushion aluminium stand
#1.09.041702

- Ⓐ 3000mm
- Ⓑ 1260mm
- Ⓒ 1045mm
- Ⓓ $\phi 25/30/35$
- Ⓔ $\phi 22mm$
- Ⓕ 1200mm
- Ⓖ 8Kg
- Ⓗ 2.7Kg

MZ-3800专业气垫铝灯架
Air-cushion aluminium stand
#1.09.041703

- Ⓐ 3800mm
- Ⓑ 1285mm
- Ⓒ 1070mm
- Ⓓ $\phi 25/30/35/40$
- Ⓔ $\phi 25mm$
- Ⓕ 1200mm
- Ⓖ 10Kg
- Ⓗ 3.3 Kg

MZ-4800专业气垫铝灯架
Air-cushion aluminium stand
#1.09.041704

- Ⓐ 4800mm
- Ⓑ 1360mm
- Ⓒ 1145mm
- Ⓓ $\phi 20/25/30/35/40$
- Ⓔ $\phi 25mm$
- Ⓕ $\phi 1200mm$
- Ⓖ 10Kg
- Ⓗ 3.6Kg



JB-2600FP气垫铝灯架
Aluminium stand
#1.09.041401-1

- Ⓐ 2650mm
- Ⓑ 1060mm
- Ⓒ 910mm
- Ⓓ $\phi 22.5/26/29.5$
- Ⓔ $\phi 22mm$
- Ⓕ 1060mm
- Ⓖ 7Kg
- Ⓗ 1.9Kg



JB-3000FP气垫铝灯架
Aluminium stand
#1.09.041402

- Ⓐ 3000mm
- Ⓑ 1250mm
- Ⓒ 1040mm
- Ⓓ $\phi 25/30/35$
- Ⓔ $\phi 22mm$
- Ⓕ 1200mm
- Ⓖ 7Kg
- Ⓗ 2.4Kg



旋转式斜臂两用灯架

2-in-1 Use Rotatable Light Stand

Photographic Accessories
摄影附件

37

M-3旋转式斜臂灯架

Rotatable stand

#1.09.051302

- Ⓐ 5000mm
- Ⓑ 1400mm
- Ⓒ 1210mm
- Ⓓ $\phi 20/25/30/35/40$
- Ⓔ $\phi 25mm$
- Ⓕ 1200mm
- Ⓖ 10Kg
- Ⓗ 4.3Kg
- Ⓘ 1220~2210mm



M-II旋转式斜臂灯架

Rotatable stand

#1.09.051303-1

- Ⓐ 4000mm
- Ⓑ 1350mm
- Ⓒ 1180mm
- Ⓓ $\phi 21/25/30/35$
- Ⓔ $\phi 22mm$
- Ⓕ 1030mm
- Ⓖ 8Kg
- Ⓗ 4.3Kg
- Ⓘ 1140~2115mm



DBJ-1中号灯架

Boom Light Stand

#1.09.061101

- Ⓐ 1500mm
- Ⓑ 850mm
- Ⓒ 1100mm
- Ⓓ 1250~2180mm
- Ⓓ $\phi 30/35mm$
- Ⓔ $\phi 25mm$
- Ⓕ 7Kg
- Ⓖ 9Kg
- Ⓕ 900mm



JB16-2003枪把灯架

Handle Light Stand

#1.09.051201

- Ⓐ 2200mm
- Ⓑ 1080mm
- Ⓒ $\phi 35$
- Ⓓ 1060mm
- Ⓔ 20x40mm
- Ⓖ 15kg
- Ⓗ 8.12Kg



CK魔术腿灯架

CK C-stand

Photographic Accessories
摄影附件

38

CK-1 可拆式脚架 Steel Light Stand

#1.09.051101

- ① 3200mm
- ② 1475mm
- ③ 1475mm
- ④ $\phi 25/30/35$
- ⑤ $\phi 30mm$
- ⑥ 1020mm
- ⑦ 20Kg
- ⑧ 9Kg
- ⑨ 1270mm



CK-1/3 Grip Head 圆饼转接头

#1.09.051104



CK-3 可调式脚架 Steel Light Stand

#1.09.051102

- ① 3200mm
- ② 1475mm
- ③ 1475mm
- ④ $\phi 25/30/35$
- ⑤ $\phi 30mm$
- ⑥ 1080mm
- ⑦ 20Kg
- ⑧ 9Kg
- ⑨ 1270mm



CK-2 魔术脚影视灯架 Steel Light Stand

#1.09.051107

- ① 3190mm
- ② 1445mm
- ③ 1445mm
- ④ $\phi 25/30/35$
- ⑤ $\phi 25mm$
- ⑥ 1040mm
- ⑦ 20Kg
- ⑧ 8.7Kg
- ⑨ 1270mm



CK-2 Grip Head 方头圆饼夹

#1.09.051109



CK-90 魔术腿低灯架 Steel Light Stand

#1.09.051111

- ① 1600mm
- ② 900mm
- ③ 900mm
- ④ $\phi 25/30/35$
- ⑤ $\phi 30mm$
- ⑥ 940mm
- ⑦ 20Kg
- ⑧ 5.5Kg



CK-90 中心伸缩杆 Center expansion rod

#1.09.051112

- ① 1440mm
- ② 725mm
- ③ 725mm
- ④ $\phi 25/30/35$
- ⑤ 20Kg



K-4 两用钢管灯架

2-in-1 Use steel tube light stand

#1.09.051305

- ① 3160mm
- ② 1380mm
- ③ 1380mm
- ④ $\phi 25/30/35$
- ⑤ $\phi 25mm$
- ⑥ 1080mm
- ⑦ 20Kg
- ⑧ 6Kg
- ⑨ 1130mm



重型钢管影视灯架

Heavy Steel Light Stand

Photographic Accessories
摄影附件

39

JF-238A 中型影视灯架
Steel Light Stand

#1.09041506

- Ⓐ 2380mm
- Ⓑ 1310mm
- Ⓒ 1310mm
- Ⓓ $\phi 35/30$
- Ⓔ 20x20mm
- Ⓕ 15Kg
- Ⓖ 7.7Kg



JB-290A 专业影视灯架
Steel Light Stand

#1.09.041508

- Ⓐ 2900mm
- Ⓑ 1325mm
- Ⓒ 1100mm
- Ⓓ $\phi 25/30/35$
- Ⓔ 20x20mm
- Ⓕ 1050mm
- Ⓖ 15Kg
- Ⓖ 7Kg



MF-3000F 专业影视灯架
Steel Light Stand

#1.09.041504

- Ⓐ 3100mm
- Ⓑ 1400mm
- Ⓒ 1400mm
- Ⓓ $\phi 30/35/40$
- Ⓔ 25x25mm
- Ⓕ 1240mm
- Ⓖ 20Kg
- Ⓖ 8Kg



JB-4200 大型影视灯架
Steel Light Stand

#1.09.041505

- Ⓐ 4600mm
- Ⓑ 1510mm
- Ⓒ 1400mm
- Ⓓ $\phi 30/35/42/48$
- Ⓔ 25x25mm
- Ⓕ 1600mm
- Ⓖ 20Kg
- Ⓖ 16.3Kg



M-6 两用钢管灯架
2-in-1 Use steel tube light stand

#1.09.051304

- Ⓐ 4080mm
- Ⓑ 1490mm
- Ⓒ 1580mm
- Ⓓ $\phi 25/30/35/40/45$
- Ⓔ 25x25mm
- Ⓕ 1200mm
- Ⓖ 20Kg
- Ⓖ 18Kg
- Ⓖ 1170-1970mm



M-8 旋转式重型不锈钢影视灯架
Rotatable multifunctional stainless Steel Light Stand

#1.09.051306

- Ⓐ 5320mm
- Ⓑ 1680mm
- Ⓒ 1720mm
- Ⓓ $\phi 25/30/35/40/45$
- Ⓔ 25x25mm
- Ⓕ 1440mm
- Ⓖ 30Kg
- Ⓖ 18.75Kg
- Ⓖ 1390-2400mm



平衡顶灯架/重型相机升降架

Balance Overhead Light Stand/Heavy Camera Stand

Photographic Accessories
摄影附件

40

BM-300 重型影视摇臂顶灯架 Boom Steel Light Stand

#1.09.061402


- ① 3100mm
- ② 1310mm
- ③ $\phi 35/40/45$
- ④ 25x25mm
- ⑤ 1500mm
- ⑥ 30Kg
- ⑦ 25.6Kg
- ⑧ 1560~2400mm
- ⑨ $\phi 25/30$ mm



BM-300 钢制手摇斜臂杆 Rail boom steel stand

#1.09.061403

- ① 1560mm
- ② 1560~2400mm
- ③ $\phi 25/30$ mm
- ④ 18Kg
- ⑤ 6.2Kg



适用灯架:

MF-3000F / JB-4200影视灯架
BM-300顶灯架 / BM-395摇臂灯架

BM-395重型手摇升降影视灯架 Hand Lifting Steel Studio Stand

#1.09.061404

- ① 4050mm
- ② 1625mm
- ③ $\phi 40/50/60$
- ④ $\phi 30 \times 30$ mm
- ⑤ 1450mm
- ⑥ 50Kg
- ⑦ 34Kg



JB-200重型相机升降架 Camera stand

#1.09.071101

- ① 2000mm
- ② 400mm
- ③ 10Kg
- ④ 900mm



JB-250重型相机升降架 Camera stand

#1.09.071102

- ① 2500mm
- ② 400mm
- ③ 12Kg
- ④ 1500mm



背景灯架/横臂杆

Background Stand/Cross Arm Stand

Photographic Accessories
摄影附件

41

DDJ-70两用背景灯架

Background Stand

#1.09.011201

- ⌀ 700mm
- ⌀ 210mm
- ⌀ 22.5/26
- 40x20mm
- 600mm
- 10Kg
- 3.08Kg



BL-70X130挂壁横臂灯架

Wall-hung Stand

#1.09.081206

- ⌀ 1300mm
- ⌀ 790mm
- ⌀ 35/30mm
- 5Kg



底座尺寸(Stand base size):300x139mm

调节角度(Adjusting angle):上下170°(From up to down) 左右160°(From left to right)

DDJ-20地灯架

Floor Stand

#1.09.011101

- ⌀ 170mm
- 40x20mm
- 400mm
- 10Kg
- 1.94Kg



L-600F两用灯架

Background Stand

#1.09.011301

- ⌀ 650mm
- ⌀ 100mm
- ⌀ 19/22
- 600mm
- 5Kg
- 1.05Kg



L-600D吸顶灯架

Top Stand

#1.09.021101

- ⌀ 550mm
- ⌀ 360mm
- ⌀ 19/22
- 80x120mm
- 3Kg
- 0.65Kg



RBJ-130反光板支架

Reflector board stand

#1.09.081204

- 800~1300mm
- ⌀ 22mm



L-210 中型斜臂横杆

Rail boom arm

#1.09.081102

- ⌀ 840mm
- 840~2150mm
- ⌀ 21/25/30mm
- 4Kg
- 2.32Kg



HD-230 手持外拍支架 Monopod

#1.09.031303

- ⌀ 2300mm
- ⌀ 775mm
- ⌀ 740mm
- ⌀ 19/22/26/29.5
- 4Kg
- 1.06Kg



B-190 小型臂杆

Rail boom arm

#1.09.081103

- ⌀ 750mm
- 750~1350mm
- ⌀ 19/22mm
- 3Kg
- 0.8Kg



适用灯架:

EQ-200 / JB-220




L-195背景窗帘横臂杆

Background curtain crossarm bar

#1.09.081101

- ⌀ 795~1950mm
- ⌀ 20/25/30mm
- 3Kg
- 0.96Kg



JB-004 影视多灯头支架

Multiple Mount Light Stand

#1.09.041507

适用灯架:
MF-3000F
JB-4200影视灯架
BM-300顶灯架
BM-395摇臂灯架

圆饼夹/脚轮/平衡沙袋

Pie Clippers/Wheel/Balancing Sandbags

Photographic Accessories
摄影附件

42

JB11-036 ϕ 22mm 脚轮 Wheel

#1.09.091101

适配灯架:

JB-300 / M-1/M-2 / JB-2600FP

JB-3000FP / MZ-2400FP/MZ-3000FP

JB11-036A ϕ 25mm 脚轮 Wheel

#1.09.091102

适配灯架:

MZ-3800FP / MZ-4800FP

M-3旋转式灯架 / DBJ-1中号顶灯架



JB11-036B

25x25mm 带脚刹万向脚轮 Wheel

#1.09.091103

适配灯架: MF-3000F重型影视灯架



平衡沙袋 Balance sandbag

#1.09.091302



JB11-036C ϕ 30mm 魔术腿脚轮

#1.09.091104

适配灯架: CK-1 / CK-3 / K-4



JB11-032A 沙袋 Sandbag

#1.09.091301



JB11-038A 元饼多功能夹

Multifunctional folder grip

#1.09.091202



JB11-033B 元饼多功能夹

Multifunctional grip

#1.09.091201



JB11-015(1/8-5/8)转接头

Adapter

#1.09.091402

适用灯架:

CK-1/CK-2/CK90魔术腿底座低角度拍摄



JB11-001(1/4-3/8)转接头

Adapter

#1.09.091401



JB11-063A

带热靴大力夹

Hot shoe clamp

#3.09.011202



JB11-060

影室灯大力夹

Multifunctional clamp

#3.09.011201



JB11-095B

C型影视灯头夹

C-type york clamp

#1.09.091203



S-30延长杆

Extension bar

#1.09.091403



JB-专业拍摄台

Photographic Table



JB-60x130
Photographic table
#3.11.041201
60x130cm



QH-Y100
Photographic table
#3.11.041203
100x240cm



JB-200*100
Photographic table
#3.11.041204
100x220cm

反光伞/柔光伞/太阳伞

Reflective Umbrella/Soft Umbrella/Sun Umbrella

Photographic Accessories
摄影附件

43



S-32-33 " S-32-40 " 柔光伞
White Umbrella
#3.10.011101 #3.10.011102
φ100cm



S-34-40 " 本白反光伞
White Umbrella
#3.10.021402
φ100cm



S-38-40 " 黑银反光伞
Black/Silver Umbrella
#3.10.021201
φ100cm



100cm 柔光太阳伞
Transparent Umbrella
#3.10.041102
φ100cm



100cm 本白太阳伞
White Umbrella
#3.10.041103
φ100cm



100cm 黑银太阳伞
Black/Silver Umbrella
#3.10.041101
φ100cm

150cm 柔光太阳伞
Transparent Umbrella
#3.10.041502
φ150cm

150cm 本白太阳伞
White Umbrella
#3.10.041503
φ150cm



φ105 深口伞柔光布
Deep Umbrella Diffuser
#3.10.041902
φ105cm



φ105 本白深口反光伞
Transparent Deep Umbrella
#3.10.041701
φ105cm




60x120cm U型反光板
Reflector Board
#3.11.021301
60x120cm

φ130 深口伞柔光布
Deep Umbrella Diffuser
#3.10.041903
φ130cm

φ130 本白深口反光伞
Transparent Deep Umbrella
#3.10.041801
φ130cm

双面反光板 2-in-1 Reflector board



φ56/φ80/φ110 双面反光板
2-in-1 Reflector Board
#3.11.021101 #3.11.021102
#3.11.021103
φ56cm/φ80cm/φ110cm



62x92cm 双面反光板
2-in-1 Reflector Board
#3.11.021201
62x92cm

5合1反光板 5-in-1 Reflector board



φ80/φ110 五合一反光板
5-in-1 Reflector Board
#3.11.011102 #3.11.011104
φ80cm/φ110cm



92x122cm/102x153cm
五合一反光板
5-in-1 Reflector Board
#3.11.011202 #3.11.011203
92x122cm/102x153cm

1.5x2M 双色抠图板

2-in-1 Collapsible background board

黑白双色
Black/white 2-in-1
#3.11.011204

蓝绿双色
Blue/green 2-in-1
#3.11.011205



涤纶吸光背景布

Matt background cloth



尺寸 Dimensions: 1.5x2m 2x3m 3x6m
#3.12.0323XX #3.12.0321XX #3.12.0322XX

涤纶吸光背景布手感细腻顺滑，高密度，不易透光，光照更均匀，色彩鲜艳且经久不褪色，手感光滑。摄影视频两用。

Matt background cloth feel delicate smooth, high density, not easy to light, more uniform light, bright color and durable, smooth feel. Photography and video.

横杆背景架/电动升降架/天花路轨

Background stand/Electric lifting frame/Ceiling rail

Photographic Accessories
摄影附件

44

4轴双排电动背景架
4-Axis Double Row Electric Background Stand
#3.12.011502



6轴双排电动背景架
6-Axis Double Row Electric Background Stand
#3.12.011503



天花路轨 Ceiling Rail

路轨标配规格 Rail Standard Size 3m×4m
#3.13.021218



天花路轨 (每米)
#3.13.021101

吊臂 Pantograph
伸缩长度 Height 43~200cm
承重Max loaded 5kg
#3.13.021201

双层滑轮
Double wheel
#3.13.021204

电线滑轮
Wire wheel
#3.13.021205


尾塞
End cap
#3.13.021213

安装板
Install board
#3.13.021212



保险绳
Safe rope
#3.13.021209

横杆伸缩背景架 Background stand

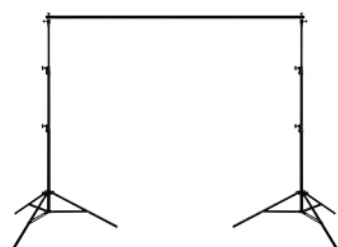

JB10-3000横杆背景架
#1.09.081201
横杆 Rail: 1725~3000mm
高度 Heigh: 3000mm

JB11-3200FPG横杆背景架
#1.09.081202
横杆 Rail: 800mm×4=3200mm
高度 Heigh: 2850mm

JB12-3200FPG横杆背景架
#1.09.081203
横杆 Rail: 800mm×4=3200mm
高度 Heigh: 3000mm

PVC/硫酸纸支架
PVC/ sulphate paper holder



可选尺寸 Available size
90×200cm #1.09.081205



硫酸纸 (张)
Sulphate paper
1189×889mm
#3.12.032001



硫酸纸 (筒)
Sulphate paper
1840×120mm
#3.12.032003

BS-300伸缩背景杆 Background telescopic rod

#1.09.081104

横杆长度 Rail | 1.25m ~ 3m



通用接口适用各种类型灯架, 三节快速伸缩长短轻松调节
Universal adapter, Speedy stretching & shrinking in three sections



ST300不锈钢背景横杆
φ48×3m #1.09.081107

ST300不锈钢背景横杆 (带灯头支架)
φ48×3m #1.09.081108



手拉升降套轴
Hand operated lifting shaft
#3.13.081101



双钩支架
Bouble Bracket
#3.13.081103



三钩支架
Triple Bracket
#3.13.081104

直播相机万向云台/万向魔术手

MK-9 Ball Head Mount/Magic Hand

Photographic Accessories
摄影附件

45



MK-9直播相机云台
Camera ball head mount
H:60mm ϕ 35mm
#3.09.011303



AQ-20小型球型相机云台
AQ-20 Ball Head Mount
H:50mm ϕ 28mm
#3.09.011302



M12万向魔术手
M12 magic arm
H:300mm
#3.09.011111



A-4球型热靴小云台
A-4 Ball Head Mount
H:55mm
#3.09.011301



1/4-1/4灯棒连接件
1/4' to 1/4' male connector
H:30mm
#3.09.011110

套装箱包/灯架袋

Kit Bag/Light Stand Bag



L-106专业套装箱
Pro Kit Bag
106(L)x32(W)x30(H)cm
#1.12.031503



L-92准专业套装箱
Sub-pro Kit Bag
92(L)x30(W)x30(H)cm
#1.12.031504

L-72便携套装箱
Kit Bag #1.12.031512
72(L)x22(W)x26(H)cm



FE22426灯架袋
Light Stand Bag #1.12.011201
117cm



HD-610pro套装包
Case Bag
37.5(L)x27.5(W)x17(H)cm
#1.12.031507



L-80灯架袋
Light Stand Bag #1.12.011101
80cm


产品知识 Product specification knowledge

原理普及

闪光持续时间 (Flash duration) :

闪光持续时间代表闪光灯闪光光速的快慢，他们之间的规律为 $t_{0.1}$ 约等于 $t_{0.5}$ 的两到三倍。

The flash duration represents the light speed of flash. Normally, $T_{0.1}$ equals about three times of $T_{0.5}$.

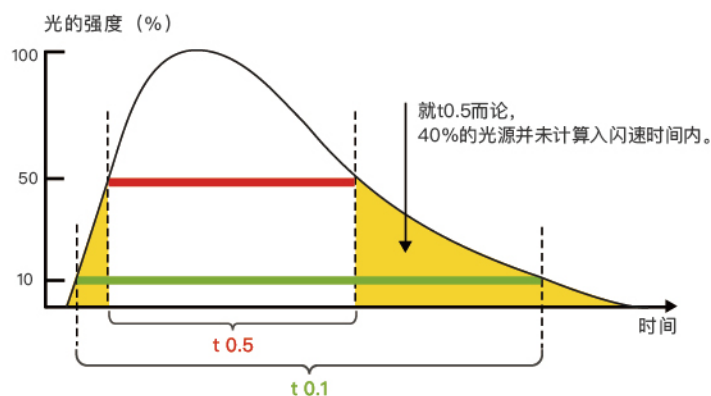

于整个拍摄过程中， $t_{0.5}$ 并不计算整个闪光时间：闪光时间再 $t_{0.5}$ 前后会出现漏光现象，可导致影像模糊。

闪光持续时间越快，瞬间凝固和捕捉运动物体的能力就越强。穿透力、细腻度、层次感更好。(在标准的闪光同步速度下)

The faster the flash duration, the greater the ability to solidify and capture moving objects in an instant. Better penetration, fineness and layering. (At standard flash sync speed)


高速闪光同步HSS (High-speed sync) :

HSS 就是用极高速的脉冲激发闪光，其原理是在快门还未开启的时候，闪光灯已经开始闪光并且发出持续脉冲；快门关闭之后，闪光灯才停止持续脉冲闪光。作用就是保证快门从开启到关闭闪光灯一直在发出持续脉冲，确保闪光光线一定能进入快门中。HSS 高速闪光同步模式能同步高达 1/8000 秒的快门速度。

HSS is the use of extremely high speed pulse to stimulate the flash. The principle is that flash starts to flash and emit continuous pulse, before camera's shutter is opened, and after the shutter is closed, the flash stops continuously pulsed. The function is to ensure that flash's continuous pulse covers the whole range from the shutter's opening to closing. The HSS (High-speed Flash Sync mode) synchronizes shutter speeds up to 1/8000 second.

HSS 的用途主要有两点：一是用来瞬间定格，用于抓拍运动物体，或者在动态中拍摄。二是室外（强光下）拍摄可以用大光圈来虚化背景，调节景深，缩小光比，压暗天空。

There are two main uses of HSS. First, it is used for instant freeze, to capture moving objects, or shooting in the dynamic. Second, in outdoor (strong light) shooting, a large aperture can be used to blur the background, adjust the depth of field, reduce the light ratio, and dim the sky.

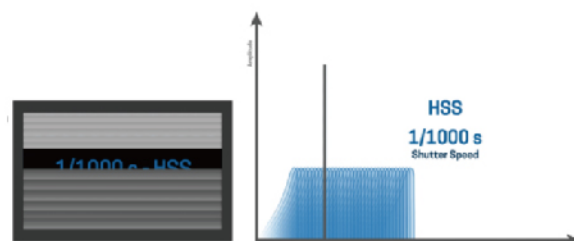

TTL模式 (TTL mode) :

TTL 功能是一种自动测光闪光系统，原理是：通过射入镜头中的光线照射到相机测光系统中获得反馈，来确定一个能够正常曝光的闪光能量数值。是一种全自动的测光闪光模式。

TTL function is an automatic metering flash power system. The principle is that flash output power calculates based on the feedback of camera's metering system by the pre-flash of the light. It is a fully automatic metering flash mode.

FREEZE定格模式 (Freeze mode) :

使用 FREEZE (FRE) 定格模式可以得到比标准闪光模式更高的闪光持续时间，最高可以达到几万分之一秒的闪光持续时间，可以更容易定格精彩瞬间。缺点是色温偏移范围比较大，需要进行白平衡的调整，金贝 MSNPRO 系列高速闪光灯最高闪光持续时间高达 1/56000s 。

Under FREEZE (FRE) mode, flash duration of the light is much higher than under standard flash mode. It can be up to tens of thousands in a second. It's much easier to capture wonderful moments. The disadvantage is that the color temperature would be relatively larger, so camera's white balance needs to be adjusted. The flash duration of Jinbei MSNPRO commercial studio light can be up to 1/56000s.