

JINBEI



LED

影视灯/直播灯/摄影灯

Video Light/ Live Light/ Photographic Light

与您共创
美好影像世界

Create Fantastic Imaging

2023



上海金贝摄影器材实业有限公司

Shanghai Jinbei Photographic Equipments Co., LTD.

上海市长宁区定西路788号7楼H座 (200052)

7H Block, No.788 DingXi Road, 200052 Shanghai, P.R.China

Tel: +86-21-61169322

Fax: +86-21-61169286

scb@goldenshell.com.cn

<https://www.jinbei-sh.cn/>


随着金贝研发技术不断升级更新，产品参数会相应发生变化，内容仅供参考

品牌故事

BRAND STORY

上海金贝摄影器材实业有限公司创立于1995年，专注摄影、摄像光源行业近三十年。是一家集产品研发、设计、制造、销售、服务于一体的综合性专业器材企业。总部位于中国上海，业务遍及全球各个国家和地区。金贝品牌以稳定、可靠的产品品质，切合市场需求的产品，坚持匠心精神的企业文化，创造出一代又一代性能卓越、技术领先的专业光源产品及附件，成为摄影、视频、直播行业中最具影响力的品牌之一。

Shanghai Jinbei Photographic Equipment Industrial Co., Ltd. was founded in 1995, specializing in photography and videography light source industry for nearly 30 years. Jinbei is a comprehensive professional equipment enterprise integrating product R&D, design, manufacturing, sales and service. Headquartered in Shanghai, China, the company has developed the business in various countries and regions around the world. Jinbei brand created generations of professional light source products and accessories with excellent performance and leading technology with stable and reliable product quality, products with market-demands, and enterprise culture of ingenuity. Jinbei has become one of the most influential brands in the photography, video and live streaming industries.

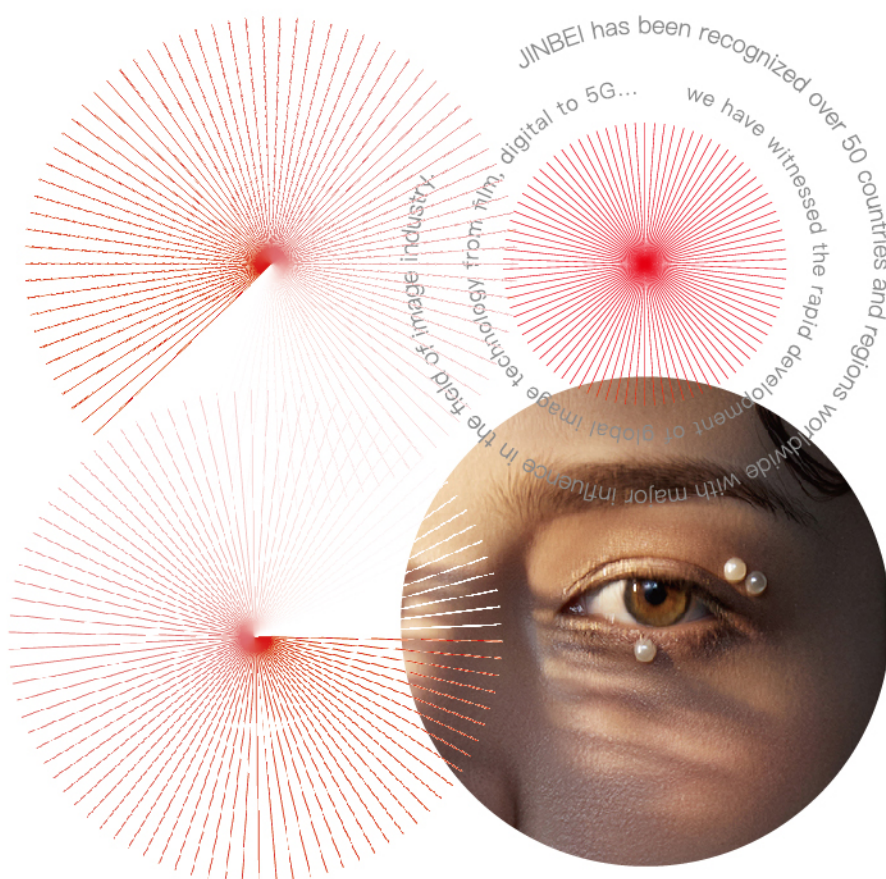



作为闪光灯领域的先驱者，金贝摄影光源拥有丰富的产品线，包括影室闪光灯、外拍闪光灯、机顶闪光灯及专业塑光附件。结合多年沉淀的技术优势，金贝产品在闪光持续时间、回电速度、新能源锂电池等重点技术领域持续创新突破。金贝始终追求高品质的影像画质，在凝固动态瞬间，画质锐度等方面满足摄影师的专业需求。

作为 COB 点光源常亮灯的先行者，金贝不断研发出可调色温区间大、显色性高、RGB 色谱全的高品质 LED 产品，并融合了人性化的 APP 灯光控制系统。操作便捷、性能稳定、色彩精准的金贝影视光源产品助力了摄像和直播领域的兴起及发展。

金贝拥有雄厚的研发技术团队，大型生产基地，先进的生产设备，科学的管理体系，保证产品的性能与质量。金贝人将继续响应市场需求，发挥自身研发、品牌、企业精神等优势，将前沿科研成果应用于摄影、摄像、直播等光源产品领域，与您共创美好的影像世界。

As a pioneer in the field of flash, Jinbei's flash and strobe has a rich product line, including studio flash, outdoor flash, speedlite and professional modifier accessories. Combined with the technical advantages of years, Jinbei products continue to innovate and make breakthroughs in key technical fields such as flash duration, recycling time, and new energy lithium batteries. Jinbei always pursues high quality image quality, and meets the demands of photographers in terms of freezing dynamic moments and sharpness of image quality.

As the forerunner of COB constant light source, Jinbei has continuously developed high-quality LED products with large tunable color temperature range, high color rendering, and full RGB color spectrum, combining humanized APP lighting control system. With convenient operation, stable performance and accurate color, Jinbei LED light source products helped the rise and development in the field of videography and live streaming.

Jinbei has a strong R&D technical team, large production base, advanced production equipment, scientific management system to ensure the performance and quality of products. Jinbei team will continue to respond to market demand, give full play to research and development, brand, enterprise spirit and other advantages. By applying cutting-edge scientific research results to photography, videography, live-streaming and other light source products, Jinbei creates fantastic imaging with you.

目录

CONTENTS



持续光源

Continuous Light Source

- | | | |
|---|---|--|
| 06 EF-600PRO/600BI 专业影视灯
EF-600PRO/600BI Video Light | 12 EF-80/80BI 双色温影视灯
EF-80/EF-80BI LED Video Light | 19 EFT-8CRGB 迷你全彩灯棒
EFT-8C RGB Mini Light Tube |
| 07 EFII-300/EF-300BI 专业影视灯
EFII-300 / EF-300BI Video Light | 13 LX-100 直播摄影灯
LX-100 LED light | 20 EFT361/EFT551 全彩便携棒灯
EFT361/EFT551 Light Tube |
| 08 EL-300/300BI 双色温影视灯
EL-300/300BL LED Video Light | 14 EFD-60M/B 便携摄影摄像灯
EFD-60M/60BI Portable Video Light | 21 EFT220BI/RGB 双色温LED/RGB 全彩棒灯
EFT-220 Bicolor LED Light Tube/RGB LED Light Tube |
| 09 EF-150PRO/220 专业影视灯
EF-150PRO/220 Video Light | 15 EFC-150RGB 全彩影视灯
EFC-150 RGB Video Light | 22 EFT860RGB 全彩多功能影视棒灯
EFT860 LED Light Tube |
| 10 EF-160BI/220BI 双色温影视灯
EF-160BI/220 LED Video Light | 16 P6(RGB/PRO/BI) 迷你全彩魔方灯
P6(RGB/PRO/BI) Mini Pocket Light | 23 EFR-48/LR-480II/EFR-36 环形直播灯
EFR-48/LR-480II/EFR-36 LED Ring Light |
| 11 EF-120/120BI 双色温影视灯
EF-120/EF-120BI LED Video Light | 18 EF-P11 RGB 全彩口袋灯
EF-P11 RGB Pocket Light | 24 EFP-12 双色温影视平板灯
EFP-12 Color LED Panel Light |



摄影附件

Photographic Accessories

- | | | | | | |
|----|---|----|---|----|--|
| 25 | EFP-50BI双色温LED平板灯
EFP-50 BiColor LED Panel light | 30 | 金贝标准三爪卡口反光罩
Jinbei Standard Mount Reflector | 40 | 手机支架
Mobile Phone Stents |
| 26 | EFP-400BI双色温影视柔光灯
EFP-400 BiColor LED Panel light | 31 | EF-ZF3(20°)/(40°)调焦聚光筒
EF-ZF3 Fresnel Spot Snoot | 41 | 专业摄影影视灯架系列
Professional Photography Light Stand Series |
| 27 | EFP-80BI/P-80RGB全彩平板灯
EFP-80 Color LED Panel light | 32 | EF-ZF6 菲涅尔变焦聚光筒
EF-ZF6 Fresnel Spot Snoot | 49 | 横杆背景架/电动升降架/天花路轨
Background Stand/Electric Lifting Frame/Ceiling Rail |
| 29 | JINBEI APP操作指南
Operation Guide | 33 | 柔光箱/柔光球
Softbox/Quick Ball Softbox | 50 | 套装箱包/灯架袋
Bag/Stand Bag |
| | | 39 | 专业旗板/柔光屏
Professional Frame Scrim Diffuser
Folding Frame Scrim Diffuser | | |



持续光源

Continuous
light
source

EF-600PRO/600BI 专业影视灯

EF-600PRO/600BI Video Light

Continuous light source
持续光源

06



适配EF-RC遥控器
EF-RC remote controller

规格参数 Parameters

型号 Type / 编码 Code	EF-600PRO / 1.05.031123			EF-600BI / 1.05.031311	
输入功率 Input power	/输出功率 Output power			600W / 720W	
EF-600PRO	100%照度 Lux	1m	100%照度 Lux	1m	3m
	裸灯 Bare light	>23500Lux	EF变焦罩60°焦段 Zoom 60° reflector	>198000Lux	>16500Lux
			EF变焦罩30°焦段 Zoom 30° reflector	>260000Lux	>28500Lux
EF-600BI (100%照度 Lux / 1m)					
裸灯 Bare light: 2700K>9100Lux / 4200K>20100Lux / 5500K>16500Lux / 6500K>12700Lux					
100%照度 Lux	2700K	4200K	5500K	6500K	
EF变焦罩60°焦段 Zoom 60° reflector	>73800Lux(1m)	>170000Lux(1m)	>124000Lux(1m)	>106000Lux(1m)	
	>6300Lux(3m)	>14200Lux(3m)	>10500Lux(3m)	>8900Lux(3m)	
EF变焦罩30°焦段 Zoom 30° reflector	>142000Lux(1m)	>250000Lux(1m)	>240000Lux(1m)	>199000Lux(1m)	
	>11900Lux(3m)	>26800Lux(3m)	>19600Lux(3m)	>16800Lux(3m)	
调光范围 Output range	0-100%(EF-600PRO:1% / EF-600BI:1%输出精度 Output accuracy)/GN1-9				
色温 Color temperature	EF-600PRO: 5500K±150K / EF-600BI: 2700K-6500K				
显色指数 CRI / TLCI	Ra>96 / TLCI>98 / TM-30 Rf (色保真度) = 92 / TM-30 Rg(色域饱和度)=102				
光效模式 Light effect modes					
预设光效+自定义光效 Lighting effects + custom lighting effects					
火焰 Fire / 呼吸 Pulse / 电视 TV / 坏灯泡 Fault bulb / 狗仔队 Paparazzi / 远近光灯 Headlight					
雷电 Storm / 紧急求救 SOS / 警示灯 Warning					
自定义光效闪烁频率 Custom light effect frequency: 1-9					
金贝2.4GHz无线系统 ≥100米			选配EF-RC LED遥控器		
JINBEI wireless system ≥100m			Compatible with JINBEI EF-RC remote control		
32个频道 CH: 00-31			16个组别 GR: A/B/C/D/E/F/G/H/I/J/L/O/P/Q/S/U		
控制协议 Control protocol			内置DMX 512组 Built-in DMX 512 control		
内置蓝牙模块(5.0版) Built-in bluetooth			APP遥控距离 Range>45米 Meter		
静音风机 Silent fan ≤ 30dB			支持风机关闭全静音模式 Support fan off mute mode		
注: 关闭散热风机, 亮度自动降至原亮度的30%					
Note: turn off the fan, and the brightness will automatically drop to 30% of the original brightness.					
输入电压 Sync voltage	100-240V AC 50/60Hz 7.5A	DC输入 Input	48V DC 10A (Max 480W)		
固件升级 Firmware upgrade	支持OTA固件升级 Support OTA firmware upgrade				
尺寸 Dimensions(LxWxH)	灯头 Lamp head: 335*220*370mm / 电箱 Power box: 185*107*330mm				
重量 Weight	灯头 Lamp head: 4.65Kg / 电箱 Power box: 3.3Kg				



600W
>23500Lux

Ra>96

高显指
High CRI



9种光效
9 Light effect



专业静音风机
Ultra silent fan



高效散热
High efficient cooling



交直流两用
AC / DC use

产品特点 Features

EF-600PRO/BI 双色温拥有 600W 大功率照度输出, 具有专业的混光技术, 采用显色性 IES: TM-30-18 标准, 显色指数高色彩真实, 搭载先进主控芯片, 采用千分之一级精确调光, 亮度变化自然顺滑。支持无风机静音拍摄模式, 采用智能温控散热技术, 支持户外移动电源。可以手机 APP/2.4G 无线多重遥控。适用微电影短视频、影视棚、商业摄影、专业直播等, 是商业拍摄团队优选光源产品, 满足不同拍摄场景专业需求。

EF-600PRO/BI has 600W high-power output, with professional light mixing technology. By using color rendering IES: TM-30-18 standard, it has high CRI. It equips with advanced master chip, and uses one-thousandth of the precise dimming, brightness changes naturally smooth. Supported fan free silent shooting mode, adopts intelligent temperature control and heat protection technology, and supports outdoor mobile power supply. Mobile APP/2.4G wireless multiple remote control. It is suitable for film shooting, film studio, commercial photography, professional live broadcast, etc., and is the preferred light source product for commercial shooting teams to meet the professional needs of different shooting scenes.

标准配件 Standard accessories



电源箱
Power box



EF变焦灯罩
Zoom reflector



锁紧管夹
Locking clip



保险绳
Safety rope



灯头保护罩
Lamp cap



3米灯头连接线
3m DC cable



4.5米电源连接线
4.5m AC power cable



套装箱
Case bag

EFII-300/EF-300BI 专业影视灯

EFII-300 / EF-300BI Video Light

Continuous light source
持续光源

07



适配EF-RC遥控器
EF-RC remote controller

规格参数 Parameters

型号 Type / 编码 Code	EFII-300/1.05.031120	EF-300BI/1.05.031307
输出功率 Output power	300W	300W
显色指数 CRI	Ra>97 / TLCI>98	
100%照度 Lux (距离 Range: 1m)	裸灯 Bare light>12900Lux EF标准罩 Reflectors>135000Lux	裸灯 Bare light>11900Lux EF标准罩 Reflectors>131000Lux
调光范围 Power variation	0%~100%	
色温 Color temperature	5500K±150K	2700K-6500K
预设5种光效 Preset 5 light effects 9档光效频率 9 light effect frequency	电视 / 坏灯泡 / 烟花 / 雷电 / 闪光 TV / Fault bulb/Firework / Storm/ Flash	
金贝2.4GHz无线系统 JINBEI wireless system 遥控距离 Range >100m	适配EF-RC LED遥控器 Compatible with EF-RC LED remote controller	
频道 Channel	32个频道 Channel, CH: 00-31	
组别 Group	16个组别 Group, GR: A/B/C/D/E/F/G/H/I/J/L/O/P/Q/S/U	
内置蓝牙 Built in Bluetooth	手机APP遥控距离 Remote control distance of mobile app >15m	
静音风机 Silent fan	30dB	
电源 Operating	AC 100-240V 50/60Hz	
电池输入 Battery input	选配EF-VM电池盒安装2节VLB14.8V 220WH锂电池 2pcs 14.8V 220WH batteries with EF VM battery adapter are recommend	
尺寸 Dimensions	315(L)X225(W)X350(H)	315(L)X225(W)X350(H)
重量 Weight	3.5Kg	3.5Kg



冷暖色温可调
2700-6500K (EF-300BI)



9种创意光效
9 Light effect



交直流两用
AC / DC use



300W LED



专业静音风机
Ultra silent fan



0-100%无级调光
0-100% Adjustment

产品特点 Features

EFII-300/300BI 双色温影视摄影灯采用专业 COB LED 技术, 光线高亮, 光照均匀。显色指数高, 色彩还原逼真。高效静音散热, 强劲热导流宽域散热系统。支持无风机静音模式, 三重遥控, 多种特效模式, 支持手机 app/2.4GHz 无线 /DMX 智能调光, 金贝标准卡口(宝荣卡口)设计, 可选用多种专业附件系统营造丰富的光影效果。满足高清直播间、视频、微电影片场、演播室静音录音, 人像摄影, 广告拍摄等需求。

EFII-300/300BI LED light adopts professional COB light source. The light is bright and uniform. High CRI reflects true color performance. Efficient and super silent fan equips with heat protection with heat dissipation system. Support no fan silent mode, triple remote controls, a variety of light effects mode, support mobile app/2.4GHz wireless /DMX intelligent dimming, Jinbei standard mount design supports a variety of professional light-shape accessories system to create a rich light and shadow effect. Meet the HD studio, video, filming, studio silent recording, portrait photography, advertising shooting and other needs.

标准配件 Standard accessories



灯头保护罩
Lamp cap



EF-LED强力反光罩
Reflector

电源适配器
Power cord

选购附件 Optional



EF-ZF3 调焦聚光筒20°
Focusing condenser
1.08.041306



EF-VM V卡电池盒
Battery adapter
1.06.048001

EL-300/300BI 双色温影视灯

EL-300/300BL LED Video Light

Continuous light source
持续光源

08



规格参数 Parameters

型号 Type / 编码 Code		EL-300 / 1.05.031701		EL-300BI / 1.05.031751	
输入功率 Input power		360W		360W	
输出功率 Output power		300W		300W	
		100%照度 Lux		1m 3m	
EL-300	裸灯 Bare light		>12900Lux		>1780Lux
	EF-LED强力罩 Reflector		>135000Lux		>10700Lux
EL-300BI(100%照度 Lux)		2700K	4500K	5500K	6500K
裸灯 Bare light	1m	>6400Lux	>11700Lux	>10100Lux	>8560Lux
	3m	>870Lux	>1650Lux	>1450Lux	>1200Lux
EF-LED强力罩 Reflector	1m	>71500Lux	>129000Lux	>111000Lux	>95000Lux
	3m	>5500Lux	>10500Lux	>8990Lux	>7600Lux
调光范围 Output range		0~100%(输出精度 Output accuracy: 1%)			
色温 Color temperature		EL-300: 5500K±150K / EL-300BI: 2700K-6500K			
显色指数 CRI / TLCI		Ra>97 / TLCI>98 / TM-30 Rf (色保真度) = 92 / TM-30 Rg (色域饱和度)=102			
预设光效 Lighting effects					
恒照度输出 Constant brightness (仅Only EL-300BI) / 火焰 Fire / 呼吸 Pulse / 电视 TV / 坏灯泡 Fault bulb					
狗仔队 Paparazzi / 远近光灯 Headlight / 雷电 Storm / 紧急求救 SOS / 警示灯 Warning					
金贝2.4GHz无线系统 ≥100米		选配EF-RC LED遥控器			
JINBEI wireless system ≥100m		Compatible with JINBEI EF-RC remote control			
32个频道 CH: 00-31		16个组别 GR: A/B/C/D/E/F/G/H/I/J/L/O/P/Q/S/U			
内置蓝牙模块(5.0版) Built-in bluetooth		APP遥控距离 Range>45米 Meter			
静音风机 Silent fan ≤ 30dB		支持风机关闭全静音模式 Support fan off mute mode			
注: 关闭散热风机, 亮度自动降至原亮度的30%					
Note: turn off the fan, and the brightness will automatically drop to 30% of the original brightness.					
输入电压 Sync voltage		AC 100-240V 50/60Hz			
固件升级 Firmware upgrade		支持OTA固件升级 Support OTA firmware upgrade			
尺寸 Dimensions		345(L)*215(W)*325(H)mm			
重量 Weight		EL-300: 3.65Kg / EL-300BI: 3.68Kg			



EL-300 > 135000Lux
EL-300BI > 111000Lux

Ra>97

高显指
High CRI



10种光效
10 Light effect



交直流两用
AC / DC use



手机APP调节
APP control



冷暖色温可调
2700-6500K

产品特点 Features

EL-300/300BI 双色温影视摄影灯采用专业 COB LED 技术, 外加耐高温隔热防护玻璃高清通透, 高显指 Ra>97, 双色温 2700K ~ 6500K 调节, 色彩饱和度高, 美颜靓丽。强劲导热流宽域系统高效散热, 功率大亮度高。支持无风机静音模式, 双重遥控, 多种特效模式, 支持手机 app/2.4GHz 无线 / 智能调光, 金贝标准卡口 (宝荣卡口) 设计, 可选用多种专业附件系统营造丰富的光影效果。满足高清直播间、视频、演播室静音录音, 人像摄影, 广告拍摄等专业使用要求。

EL-300/300BI LED light adopts professional COB light source with protective glass. High CRI > 97. Adjustable color temperature 2700K ~ 6500K. Efficient and super silent fan equips with heat protection to reach high power and high brightness. Support no fan silent mode, dual remote control, a variety of light effects mode, support mobile app/2.4GHz wireless/intelligent dimming, Jinbei standard mount design supports a variety of professional light-shape accessories system to create a rich light and shadow effect. Meet the HD studio, video, filming, studio silent recording, portrait photography, advertising shooting and other needs.

选购附件 Optional accessories



KE-90
深口柔光箱/格栅
Deep softbox/Grid
#1.07.051120
#1.07.051205



KE-35X140
格栅柔光箱
Grids pro softbox
1.07.051113



φ65球型柔光罩
Quick ball softbox
1.08.021103



EF-ZF3 聚光筒40°
Focusing condenser
1.08.041309

EF-150PRO/220 专业影视灯

EF-150PRO/220 Video Light

Continuous light source
持续光源

09



规格参数 Parameters

型号 Type / 编码 Code	EF-150Pro / 1.05.031121	EF-220 / 1.05.031122
输出功率 Output power	160W	220W
显色指数 CRI	Ra>97 / TLCI>98	
100%照度 Lux (距离 Range: 1m)	裸灯 Naked lamp > 7200Lux EF标准罩 Reflectors > 72800Lux	裸灯 Naked lamp > 8800Lux EF标准罩 Reflectors > 88000Lux
调光范围 Power variation	0%~100%	
色温 Color temperature	5500K±200K	
预设9种光效 Preset 9 light effects	电视 / 坏灯泡 / 烟花 / 雷电(1、2、3) / 闪光(1、2、3) TV / Fault bulb/Firework / Storm/ Flash	
金贝2.4GHz无线系统 JINBEI wireless system 遥控距离 Range > 100m	适配EF-RC LED遥控器 Compatible with EF-RC LED remote controller	
频道 Channel 组别 Group	32个频道 Channel, CH: 00~31 16个组别 Group, GR: A/B/C/D/E/F/G/H/I/J/L/O/P/Q/S/U	
内置蓝牙 Built in Bluetooth	手机APP遥控距离 Remote control distance of mobile app > 45m	
静音风机 Silent fan	30dB	
电源 Operating	AC 100~240V 50/60Hz	
尺寸 Dimensions	265(L)X135(W)X230(H)	280(L)X135(W)X230(H)
重量 Weight	2.1Kg	2.2Kg



150PRO > 58000Lux
220W > 85000Lux

Ra>97

高显指
High CRI



9种光效
9 Light effect



专业静音风机
Ultra silent fan



高效散热
High efficient cooling

产品特点 Features

EF-150Pro/220 影视摄影灯, 采用专业 COB LED 点光源技术, 光线均匀扩散层次感丰富, 肤色细腻光泽, 光照自然。高显指 Ra>97, 标准色温 5500K, 色彩还原饱和度高。热导流宽域系统高效散热, 满足高强度使用功率大亮度高。内置 9 种预设场景, 双重遥控, 支持手机 app/2.4GHz 无线 / 智能调光, 金贝标准卡口 (宝荣卡口) 设计, 可选用多种专业附件系统营造丰富的光影效果。高清直播、视频、摄影等一灯多用, 创意满满所见即所得。

EF-150Pro/220 video light, using professional COB LED light source technology to create light evenly diffused layer rich, skin color delicate luster, natural light. High CRI > 97. Standard color temperature 5500K. Efficient and super silent fan equips with heat protection to reach high power and high brightness. Built-in 9 preset light effects, dual remote control, support mobile app/2.4GHz wireless/intelligent dimming, Jinbei standard mount design supports a variety of professional light-shape accessories system to create a rich light and shadow effect. Meet the HD studio, video, filming, studio silent recording, portrait photography, advertising shooting and other needs.

选购附件 Optional accessories



KE-90深口柔光箱
Deep Quick Open softbox
1.07.051120



KE-70X100专业柔光箱
Professional softbox
1.07.051116



φ100球型柔光罩
Quick ball softbox
1.08.021106



ZF6变焦聚光筒
Focusing condenser
1.08.041308

EF-160BI/220BI 双色温影视灯

EF-160BI/220 LED Video Light

Continuous light source

持续光源

10



规格参数 Parameters

型号 Type / 编码 Code		EF-160BI / 1.05.031303		EF-220BI / 1.05.031310	
输出功率 Output power		160W		220W	
显色指数 CRI		Ra>97 / TLCI>98			
EF-160BI (100%照度 Lux)	2700K	4500K	5500K	6500K	
裸灯 Bare light/1m	>3700Lux	>6500Lux	>5300Lux	>4700Lux	
EFled强力罩 Reflector/1m	>37500Lux	>65500Lux	>53600Lux	>47500Lux	
EF-220BI (100%照度 Lux)	2700K	4500K	5500K	6500K	
裸灯 Bare light/1m	>4800Lux	>8200Lux	>7200Lux	>6200Lux	
EFled强力罩 Reflector/1m	>40800Lux	>68000Lux	>60000Lux	>52000Lux	
调光范围 Power variation				0%~100%	
色温 Color temperature				2700K-6500K	
预设10种光效 Preset 10 light effects		恒照度输出模式 / 电视 / 坏灯泡 / 烟花 / 雷电(1、2、3) / 闪光(1、2、3) Constant brightness mode / TV / Fault bulb/Firework / Storm/ Flash			
金贝2.4GHz无线系统 JINBEI wireless system 遥控距离 Range >100m			适配EF-RC LED遥控器 Compatible with EF-RC LED remote controller		
频道 Channel 组别 Group		32个频道 Channel, CH: 00-31 16个组别 Group, GR: A/B/C/D/E/F/G/H/I/J/L/O/P/Q/S/U			
内置蓝牙 Built in Bluetooth		手机APP遥控距离 Remote control distance of mobile app >30m			
静音风机 Silent fan: 30dB 注: 关闭散热风机, 亮度自动降至原亮度30% Note:Turn off the cooling fan and the brightness will be automatically reduced to 30% of the original brightness.				支持风机关闭全静音模式	
电源 Operating				AC 100-240V 50/60Hz	
尺寸 Dimensions		265(L)X135(W)X230(H)		313(L)X135(W)X230(H)	
重量 Weight		2.2Kg		2.5Kg	



160BI > 65500Lux
220BI > 68000Lux

Ra>97

高显指
High CRI



10种光效
10 Light effect



2700K~6500K广域色温
Constant colour temperature



专业静音风机
Ultra silent fan



交直流两用
AC/DC use

直播布光案例图 Live lighting case



EF-120/120BI 双色温影视灯

EF-120/EF-120BI LED Video Light

Continuous light source
持续光源

11



EF-120 > 31800Lux
EF-120BI > 28200Lux

Ra > 96

高显指
High CRI



9种光效
9 Light effect



交直流两用
AC / DC use



冷暖色温可调
2700-6500K



手机APP调节
APP control

规格参数 Parameters

型号 Type/编码 Code	EF-120/1.05.031125	EF-120BI/1.05.031314
输入功率 Input power	144W	
输出功率 Output power	120W	
光照度 Lux (1m裸灯 Naked lamp)	2700K:裸灯 Bare light > 4670Lux / 标准Reflector > 22900Lux 4500K:裸灯 Bare light > 5280Lux / 标准Reflector > 26700Lux 5500K:裸灯 Bare light > 5550Lux / 标准Reflector > 28200Lux 6500K:裸灯 Bare light > 5720Lux / 标准Reflector > 29200Lux	
调光范围 Output range	0~100%(输出精度 Output accuracy: 1%)	
色温 Color temperature	5500K±100K	2700K~6500K
显色指数 CRI / TLCI	Ra > 96 / TLCI > 97	
预设光效 Lighting effects	"FX1" 电视 / "FX2" 坏灯泡 / "FX3" 雷电 / "FX4" 火焰 / "FX5" 呼吸 "FX6" 狗仔队 / "FX7" 远近光灯 / "FX8" SOS / "FX9" 警示灯 "FX1" TV / "FX2" bad bulb / "FX3" lightning / "FX4" fire / "FX5" breathing "FX6" paparazzi / "FX7" high and low light / "FX8" SOS / "FX9" warning light	
内置蓝牙模块(5.0版) Built-in bluetooth	APP遥控距离 Range > 45米 Meter	
静音风机 Silent fan ≤ 30dB	OTA固件升级 OTA firmware upgrade	支持 Support
电源 Power	输入 Input: AC 100-240V 90W 50/60Hz 输出 Output: DC 24V 4A(EF80)/5.5A(EF120)	
适配电池盒/电池 Adaptive battery box / battery	EF-120 V卡电池盒 V bayonet battery box / 14.8V 220WH锂电池x1 全光续航 endurance > 100min (输出功率自动降至100W The output power is reduced to 100W)	
重量 Weight	0.94Kg	
尺寸 Dimensions	208(L) x 122(W) x 165(H)mm	

产品特点 Features

EF-120/120BI 双色温摄影灯，交直流两用 120W 输出功率，单 / 双色温可选，显指高色温准，静音高效散热。内置9种创意光效，手机 app 全功能调控。金贝标准卡口（宝荣卡口）设计，可选用多种专业附件系统营造丰富的光影效果。广泛适用于各种直播带货、视频拍摄、移动摄影补光，一手掌控，随走随拍。

EF-120/120BI video light, with AC/DC 120W output power. Single or Bi color temperature optional, high color temperature precision, quiet and efficient heat dissipation. Built-in 9 kinds of creative light effects, mobile app full function control. J Jinbei standard mount design supports a variety of professional light-shape accessories system to create a rich light and shadow effect. Widely used in all kinds of live broadcasting, video shooting, mobile photography fill light, one hand control, as you go.

标准配件 Standard accessories



标准反光罩 Reflector 灯头保护罩 Lamp cap 保险绳 Safety rope Φ16柔光布 Diffuser cloth 电源适配器 Power adapter

选购附件 Optional



EF-80/80BI 双色温影视灯

EF-80/EF-80BI LED Video Light

Continuous light source
持续光源

12



规格参数 Parameters

型号 Type/编码 Code	EF-80/1.05.031124	EF-80BI/1.05.031313
输入功率Input power	96W	
输出功率Output power	80W	
光照度 Lux (1m裸灯 Naked lamp)	2700K:裸灯 Bare light>3500Lux /标罩Reflector>18600Lux 4500K:裸灯 Bare light>3960Lux /标罩Reflector>21400Lux 5500K:裸灯 Bare light>4150Lux /标罩Reflector>22500Lux 6500K:裸灯 Bare light>4300Lux /标罩Reflector>23200Lux	
调光范围 Output range	0~100%(输出精度 Output accuracy: 1%)	
色温 Color temperature	5500K±100K	2700K-6500K
显色指数 CRI / TLCI	Ra>96/ TLCI>97	
预设光效 Lighting effects	"FX1"电视 / "FX2"坏灯泡 / "FX3"雷电 / "FX4"火焰 / "FX5"呼吸 "FX6"狗仔队 / "FX7"远近光灯 / "FX8"SOS / "FX9"警示灯 "FX1" TV / "FX2" bad bulb / "FX3" lightning / "FX4" fire / "FX5" breathing "FX6" paparazzi / "FX7" high and low light / "FX8" SOS / "FX9" warning light	
内置蓝牙模块(5.0版) Built-in bluetooth	APP遥控距离 Range>45米 Meter	
静音风机 Silent fan ≤30dB	OTA固件升级 OTA firmware upgrade	支持 Support
电源 Power	输入Input: AC 100-240V 90W 50/60Hz	输出Output: DC 24V 4A(EF80)/5.5A(EF120)
适配电池盒/电池 Adaptive battery box / battery	EF-80/EF-80BI F970手柄电池盒 Handle battery box / NP-F970锂电池x2 全光续航endurance>80min (输出功率自动降至60W The output power is reduced to 60W)	
重量 Weight	0.94Kg	
尺寸 Dimensions	208(L) x 122(W) x 165(H)mm	



EF-80>25500Lux
EF-80BI>22500Lux

Ra>96

高显指
High CRI



9种光效
9 Light effect



交直流两用
AC / DC use



冷暖色温可调
2700-6500K



手机APP调节
APP control

移动补光案例图 Moving lighting case



>80分钟
全光续航

>180分钟
半光续航

选购附件 Optional accessories



φ56球彤柔光罩
φ56 quick softball
#1.08.021110



F970手柄电池盒
Battery adapter
1.06.048004



F970 LED灯锂电池
Battery
1.06.040601



EQ-220摄影灯架
Steel stand
1.09.031504



EF80/120便携套装包
Carry bag
1.12.031514

LX-100直播摄影灯

LX-100 LED Video Light

Continuous light source
持续光源

13



规格参数 Parameters

型号 Type	LX-100
编码 Code	1.05.031117
功率 Power	100W
显色指数 Ra	Ra>96/TLCI>98
光照度 (1m)	裸灯>4300Lux EF强力罩>40000Lux
内置蓝牙模块 Built-in Bluetooth	APP遥控距离 range>15m
预设9种光效 9 light effect	电视/坏灯泡/雷电/火焰/呼吸/狗仔队/远近光/SOS/警示灯 TV/ Fault bulb/ Storm/ Fire/ Pluse/ Paparazzi/ Headlight/ Warning
调光范围 Power variation	0~100%
色温 Color temperature	5500K±200K
电源 Operating	AC 100~240V 50/60Hz 3A Fuse
尺寸 Dimensions(LxWxH)	240X120X205mm
重量 Weight	1.25Kg



100W LED
>40000Lux

Ra>96

高显指
High CRI



9种光效
9 Light effect



标准色温
Standard temperature



高效散热
High efficient cooling



专业静音风机
Ultra silent fan

直播案例图 Live case



选购附件 Optional accessories



EF-LED强力反光罩
EF-LED reflector
1.08.011204



EF聚光筒
EF sport snoot
#1.08.041302



DM-60x90 柔光箱
Softbox
#1.07.021107



φ56球形柔光罩
φ56 quick softball
#1.08.021110

EFD-60M/BI 便携摄影摄像灯

EFD-60M/60BI Portable Video Light

Continuous light source
持续光源

14



手柄电池盒套装 (另购)

Ra>97

高显指
High CRI



10种光效
10 Light effect



专业静音风机
Ultra silent fan



高效散热
High efficient cooling



交直流两用
AC / DC use



轻量化
Light weight



智能遥控
APP control

规格参数 Parameters

型号 Type	EFD-60M	EFD-60BI
编码 Code	1.05.031114	1.05.031115
功率 Power	60W	60W
显色指数 Ra	Ra>97/TLCL>98	Ra>97/TLCL>98
光照度 (1m) 裸灯>2800Lux / 标配反光罩>21000Lux	裸灯>2600Lux / 标配反光罩>17500Lux	
内置蓝牙模块 Built-in Bluetooth	APP遥控距离 range>15m	
预设9种光效 9 light effect	电视/坏灯泡/雷电/火焰/呼吸/狗仔队/远近光/SOS/警示灯 TV/ Fault bulb/ Storm/ Fire/ Pluse/ Paparazzi/ Headlight/ Warning	
调光范围 Power variation	0~100%	
色温 Color temperature	5500K±200K	2700~6500K
电源 Operating	AC 100~240V 50/60Hz 2.5A Fuse	
尺寸 Dimensions(LxWxH)	160(L)X122(W)X81(H)mm	
重量 Weight	660g	

产品特点 Features

EF-60M/60BI 可调色温 LED 摄影灯体积小巧(0.66kg), 标配专业反光灯罩光照度 >17500Lux, 高亮便携, 随走随拍, 满足视频、直播、摄影、摄像、新闻采访等多种场景应用。搭配 970 锂电池两节全光续航时间 >80 分钟, 选配卡口转接环 (3.09.011102) 可选择不同的专业附件满足户外补光、人像视频拍摄创作。

EF-60M/60BI LED video light with compact weight (0.66kg). By using the reflector in the package, the luminance can reach over 17500Lux. This high-light and portable light can meet the use of on location shooting, video shooting, live broadcast, photography, news interview and other scene applications. With 2pcs of F970 battery, it can reach over 80 minutes at full power. Optional choice of Bowens mount adapter (3.09.011102) can be used to match different light-shape accessories.

标准配件 Standard accessories



EFD-60反光罩
Reflector



灯头保护罩
Lamp cap



电源适配器
Power adapter



适配器挂袋
Adapter bag



便携套装箱
Portable suit box



EFD-60变焦聚光筒
Zoom focus Snoot
1.08.041304



HD-200转接环
Transfer bracket
#3.09.011102



HD-65柔光箱
Softbox
1.07.011308

选购附件 Optional

EFC-150 RGB全彩影视灯

EFC-150 RGB Video Light

Continuous light source
持续光源

15



适配EFC-150RGB遥控器
EFC-150RGB remote controller



HSI色彩模式
Color mode



CCT色温模式
2700~7500K



19种光效
19 Light effect



机身防水
Waterproof



LED调焦灯头
Zoom LED



专业静音风机
Ultra silent fan



交直流两用
AC / DC use



双重遥控
2.4GHz/手机APP


产品特点 Features

EFC-150RGB 可变焦 LED 影视灯采用 RGBWW 灯珠技术, 全彩模式 CCT 双色温模式, FX19 种视频光效, HSI 色彩模式, 36000 种色彩, 交直流两用, 灯头可调焦光线聚扩。丰富的特效功能, 模拟真实环境光效, 视频直播摄影动漫创作尽显幻彩流光, 使画面体现迷人的光影结构。

EFC-150RGB zoom LED light adopts RGBWW lamp technology. HSI and CCT mode, FX19 kinds of light effect, HSI color mode, 36,000 kinds of colors, AC and DC dual use. The lamp head can be adjusted for zoom focus. Rich special effects function simulates the real environment light effect. The creation of magic color streamer can meet the use of on location shooting, video shooting, live broadcast, photography and other scene applications.

规格参数 Parameters

型号 Type	EFC-150
编码 Code	1.05.031308
输出功率 Output power	150W
显色指数 Ra	Ra>97/TLCI>98
100% 照度 Lux 裸灯 Bare light	>5000Lux
距离 1m EF强力罩 reflector	>52500Lux
RGB色域 HSI	0~359
内置蓝牙模块 Built-in Bluetooth	支持OTA固件升级
19种预设光效	9档光效频率
19 preset light effect	9 light effect frequency
调光范围 Power variation	0%~100%
色温 Color temperature	2700K~7500K
金贝2.4GHz无线系统	适配EFC-150RGB LED遥控器
JINBEI wireless system	Compatible with EFC-150RGB remote controller
遥控距离 Range	>100m(EFC-150RGB遥控器remote control)
频道 CH	32个频道, CH: 00~31
组别 GR	16个组别, GR: A/B/C/D/E/F/G/H/I/J/L/O/P/Q/S/U
电源 Operating	AC 100~240V 50/60Hz
尺寸 Dimensions(LxWxH)	335(L)x225(W)x350(H)
重量 Weight	3.5Kg

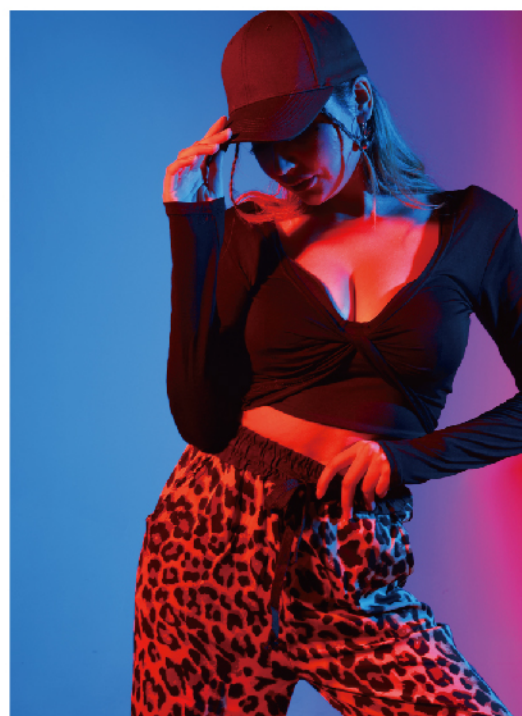

P6(RGB/PRO/BI) 迷你全彩魔方灯

P6(RGB/PRO/BI) Mini Pocket Light

Continuous light source
持续光源

16

RGB/PRO 全彩版

BI 双色温版

6W高亮柔光 | RA>96 | 2000mAh锂电池

27种光效预设，多灯场景拍摄



可调色温
2700K-7500K



27种
创意光效



0-100%
无级调光



TLCI≥98
色彩还原准确



磁力吸附
巧妙布光



四面冷靴
创意拼接



内置锂电
稳定续航



Type-C
充电接口



规格参数 Parameters

型号 (Type) / 编码 (Code)	P6 BI / 1.05.031406	P6 RGB / 1.05.031407	P6 PRO/1.05.031408
功率 (Power)	6W	6W	6W
显示屏 (Display screen)	无	0.91寸OLED屏	0.96寸TFT彩屏
光源 (Light source)	72颗(pcs)CCT贴片LED(chip)	40颗(pcs)CCT贴片LED(chip)/20颗(pcs)RGB贴片LED(chip)	
光照度 (Luminous Lux) (0.5m)	CCT色温模式(Color temperature model): 2700K>420Lux / 5500K>500Lux / 5600K>500Lux	CCT色温模式(Color temperature model): 2700K>320Lux / 5500K>425Lux / 7500K>380Lux RGB全彩模式(RGB mode): 红色 (R) >100Lux / 绿色 (G) >135Lux / 蓝色 (B) >38Lux	
调光范围 (Output range)	0~100% (调光精度Dimming accuracy 1%)	0~100% (调光精度Dimming accuracy 1%)	
色温 (Color temperature) / 显色指数 CRI	2700K-5600K / Ra>95	2700K-7500K / Ra>96	2700K-7500K / Ra>95
RGB 全彩模式 (Full color mode)	无	HUE 色相 (Color matching) : 360°调色 INT 彩灯亮度 (Color brightness) : 0~100%	
内置27种光效模式	无	电视/TV 火焰/Fire 烟火/fireworks 坏灯泡/Fault bulb 呼吸/Pulse 烟花/Firework 狗仔队/Paparazzi 雷电1/Storm 1 雷电2/Storm2 雷电3/Storm3 闪光灯1/Flash1 闪光灯2/Flash2 闪光灯3/Flash3 远光灯/Headlight 派对F/ Party Fast 派对S /Party Slow “R”红色频闪/Red multi “B”蓝色频闪/Blue multi 紧急求救/SOS 警示灯/Warning 消防车/Fire engine 警灯/Police “G”绿色频闪/Green multi “RGB” 彩色频闪/RGB multi 颜色循环/Color cycle 救护车 Ambulance 色温循环/ Color temperature cycle	
内置蓝牙 手机APP调节	无	无	有
电池容量 (Battery volume)	3.7V 2000mAh锂电池 (Lithium)	3.7V 2000mAh锂电池 (Lithium)	
续航时间 (Endurance time) (全功率 Full power)	>90分钟 (Minutes)	>90分钟 (Minutes)	
充电接口 (Charging port) / 电源输入 (Input voltage)	Type-C / 5V 1A	Type-C / 5V 1A	
扩展 (Extend)	不带磁性	背面磁铁吸附 (Magnet)	
尺寸 (Dimensions)/重量 (Weight)	66(L)x66(W)x30(H)mm/100g	66(L)x66(W)x30(H)mm/100g	

标准配件 Standard accessories

P6-BI *1
P6-RGB *1
P6-PRO *1
冷靴支架 *1
Cold shoe bracket
Type-C 数据线 *1
Type-C cable
冷靴拼接支架 *1
Cold shoe connector



选购附件 Optional

PF-1补光灯手机夹
PF-1 Phone clamp
#3.09.011206



L-22带球台迷你台架
Desk tripod with ball mount
#3.09.011403



EQ-3双头冷靴手机夹
Phone clamp with 2 cold-shoe
#3.09.011204



EQ-3手机云台支架套装
Mobile Phone Tripod Set
#1.09.031502-1



EF-P11 RGB全彩口袋灯

EF-P11 RGB Pocket Light

Continuous light source
持续光源

18



HSI色彩模式
Color mode



19种光效
19 Light effect

Ra>96

高显指
High CRI



0~100%无级调光
0~100% adjustment



CCT色温模式
2700-10000K



磁吸设计
Magnet design

360°全彩随心调

全彩36000种强大色库·颠覆单一·创造更多精彩

HUE

0~359°全彩调节

SAT

0~100%饱和度

INT

0~100%亮度



红色(R)>320Lux | 绿色(G)>550Lux | 蓝色(B)>140Lux

规格参数 Parameters

型号 Type	EF-P11
编码 Code	1.05.031607
功率 Power	10W
色温 Color temperature / 显色指数 Ra	2700~10000K / Ra>96

光照度 Luminous Lux 0.5m

CCT色温模式 Color temperature model:

2700k>1200Lux/5500k>1500Lux/10000k>1500Lux

RGB全彩模式 RGB mode:红色(R)>320Lux/绿色(G)>550Lux/蓝色(B)>140Lux

HSI全彩模式 Full color mode

HUE色相 Color matching:360°调色

SAT色彩饱和度 Color saturation:0~100%

INT亮度 Brightness:0~100%

电池容量 Battery volumn 3.7V 4000mAh 14.8Wh锂电池 Lithium

续航时间 Endurance time(全功率 Full power) > 90分钟 Minutes

调光范围 Power variation 0%~100%

充电接口 Charging port /电源输入 Input voltage Type-C 5V/ 2A

尺寸 Dimensions(LxWxH) 154(L)X79(W)X15(H)mm/260g

重量 Weight 260g

产品特点 Features

EF-P11 全彩 RGB 口袋补光灯，全金属机身，散热性好，带磁吸设计耐用性强，体积小巧便于携带，19种创意光效，可调色温 2700K ~ 10000K，内置锂电池续航时间>90分钟。适用于视频、直播、人像静物等多种创意场景拍摄。

EF-P11 RGB light with all metal shell and high heat dissipation. Small size with magnetic design for easy to carry. 19 creative light effects and adjustable color temperature 2700K ~ 10000K, built-in lithium battery life > 90 minutes. Suitable for video, live broadcast, portrait and other creative scene shooting.

标准配件 Standard accessories



EF-P11



1/4冷靴底座
Cold shoe adapter



Type-C数据线
Type-C cable



绒布袋
Pocket

EFT-8C RGB迷你全彩灯棒

EFT-8C RGB Mini Light Tube

Continuous light source

持续光源

19



HSI色彩模式
Color mode



20种光效
Light effect



0~100%无级调光
0~100% Adjustment



手机APP遥控
APP Control

规格参数 Parameters

型号 Type	EFT-8C
编码 Code	1.05.031606
功率 Power	8W
显色指数 Ra	Ra>96/TLCI>98
光照度 (1m)	800Lux
灯珠数量 LED quantity	176颗pcs
色温 Color temperature	2000~10000K
预设光效 light effect	20种预设光效 Present light effect 6种自定义光效 Individual light effect
内置蓝牙模块 Built-in Bluetooth	APP遥控距离 range>15m
调光范围 Power variation	1~100%
DC电源 Operating	DC 3.7V
电池 Battery	2节3.7V 3000mAh 18650电池, 续航>60min
尺寸 Dimensions(LxWxH)	288(L)x45(W)x39(H)mm
重量 Weight	285g



标准配件 Standard accessories



EFT-8C*1



引磁片*2
Iron chip



Type-C数据线*1
Type-C cable



绒布袋*1
Pocket

EFT361/EFT551 全彩便携棒灯

EFT361/EFT551 Light Tube

Continuous light source
持续光源
20



交直流两用

AC / DC use



26种光效

Light Effect



0~100%无级调光

0-100% Adjustment



手机APP调节

APP Control

规格参数 Parameters

型号 Type/编码 Code	EFT-551—1.05.031611(灰Grey)/1.05.031614(金Golden)
型号 Type/编码 Code	EFT-361—1.05.031612(灰Grey)/1.05.031613(金Golden)
功率 Power	24W
显色指数 Ra	Ra>96/TLCI>98
光源 Light source	
EFT-551—288颗LED灯珠 Lamp beads	
EFT-361—240颗LED灯珠 Lamp beads/72颗RGB贴片灯 Patch lamp	
光照度 Luminous Lux (0.5m)	
EFT-551—2700K>2000Lux/5500K>2200Lux/7500K>2200Lux	
EFT-361—2700K>1800Lux/5500K>2000Lux/7500K>2000Lux	
EFT-361—红色 R >250Lux/绿色 G>480Lux/蓝 B>120Lux/黄 Y>400Lux	
光效模式 Light effect modes	EFT-551: 9种/EFT-361: 26种
内置蓝牙模块 Built-in Bluetooth	APP遥控距离 range>30m
调光范围 Power variation	0~100%
色温 Color temperature	EFT-551: 2700K-7500K/EFT-361: 2000K-7500K
DC电源 Operating	DC 7.5V/3.2A
尺寸 Dimensions(LxWxH)	605(L)Xφ51.5mm
重量 Weight	620g (不含挡光板 Without barn door)

产品特点 Features

EFT-551 双色温手持棒灯可调色温 2700K ~ 7500K, 24W 输出功率, 亮度高, 全金属机身可选配 26650/5000mAh 通用锂电池设计, 续航时间可达 100 分钟, 可拆卸更换备用电池, 无需担忧续航时间。AC/DC 双重供电室内外两用。内置蓝牙, 手机 App 控制模式。

EFT-361RGB 全彩棒灯 HSI 全彩模式 (36000 种色彩可调), CCT 双色温模式, 26 种创意光效。标配可拆卸挡光板精准控光, 炫彩变色, 渲染氛围。外拍便携补光创意光绘。

适用于人像视频、直播、Vlog、二次元拍摄等各种场景创意随心。

EFT-551 Bi-color LED light tube can be adjusted from 2700K to 7500K, 24W output power, high brightness, all metal shell. Optional of 26650/5000mAh lithium battery design, with battery life up to 100 minutes. With removable replacement spare battery, no need to worry about the battery life. AC/DC dual power supply for indoor and outdoor use. Built-in Bluetooth for App control.

EFT-361RGB full color LED light tube, with HSI full color mode (36,000 colors can be adjusted), CCT Bi-color temperature mode, 26 creative light effects. Standard removable barn door can precise control light. Colorful light selection for rendering atmosphere. Portable use of on location shooting can fill light or creative light painting.

It is suitable for portrait video, live broadcast, Vlog, and other scenes.

选购附件 Optional accessories



26650锂电池 3.7V/5000MAH
26650/3.7/5500mah battery (2pcs)
1.06.350116



26650/18650锂电池充电器
Battery charger (2 slot)
1.06.040761



MK-9直播相机云台
Camera ball head mount
3.09.011303



M11-05转接支架
M11-05 Bracket
3.09.011112

EFT220BI/RGB 双色温LED/RGB全彩棒灯

EFT-220 Bicolor LED Light Tube/RGB LED Light Tube

Continuous light source
持续光源

21



RGB全彩模式
仅EFT-220RGB




CCT色温模式
2700~7500K



>1700Lux
14W全光

Ra>96

高显指
High CRI

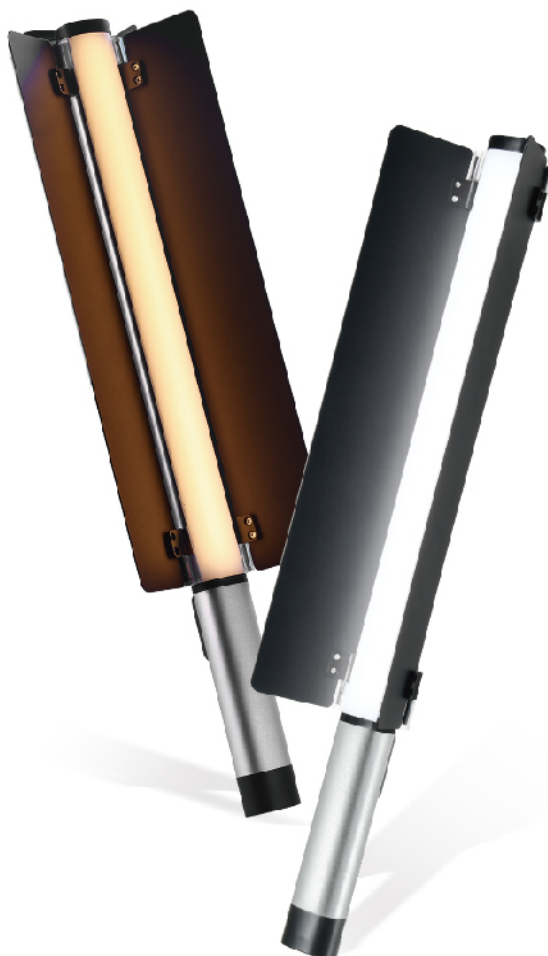

规格参数 Parameters

型号 Type / 编码 Code	EFT-220BI / 1.05.031615	EFT-200RGB / 1.05.031617
输出功率 Output power	16W	14W
显色指数 CRI	Ra>96 / TLCI>98	
光照度 Luminous Lux (0.5m)	EFT-220BI:2700K>1500Lux/5500K>1700Lux/7500K>1750Lux EFT-220RGB:2700K>1500Lux/5500K>1700Lux/7500K>1750Lux	
调光范围 Power variation	0~100% / 数值显示 Digital display 0.0~10(EFT-220BI) / 000~100(EFT-220RGB)	
色温 Color temperature	2700K-7500K	
预设光效 Preset lighting effects		
EFT-220BI 内置10种预设光效 Built-in 10 preset lighting effects		
恒照度输出(Constant brightness)/火焰(Fire)/呼吸(Pulse)/电视(TV)/坏灯泡(Fault bulb)		
狗仔队(Paparazzi)/远近光灯(Headlight)/雷电(Storm)/紧急求救(SOS)/ 警示灯(Warning)		
EFT-220RGB 内置21种预设光效 Built-in 21 preset lighting effects		
恒照度输出(Constant brightness)/火焰(Fire)/呼吸(Pulse)/电视(TV)/坏灯泡(Fault bulb)		
远近光灯(Headlight)/雷电(Storm)/狗仔队(Paparazzi)/紧急求救(SOS)/警示灯(Warning)		
警灯(Police)/消防车(Fire engine)/救护车(Ambulance)/烟花(Fire work)/派对“快”(Party“Fast”)		
派对“慢”(Party“Slow”)/“R”红色频闪(Red multi)/“G”绿色频闪(Green multi)		
“B”蓝色频闪(Blue multi)/“RGB”彩色频闪(Warning)/色温循环(Color temperature cycle)		
RGB全彩模式 RGB mode (仅Only EFT-220RGB)	0~359	
无线遥控 Wireless remote control(仅Only EFT-220RGB)	内置蓝牙模块 Built-in bluetooth	
供电模式 Power supply modes		
内置18650 7.4V 3000mAh锂电池供电 18650 7.4V 3000mAh lithium batteries for power supply		
充电接口 Charging interface: USB Type-C(5V DC 2A)/充电时间 Charging time: 约2小时 About 2 hours		
全光续航时间(5500K)>80分钟 Endurance time(5500K) > 80 minutes		
扩展 Extend	1/4'通用螺口 Adapter screw x 2	
尺寸 Dimensions(mm)	EFT-220BI: 575(L) x 40(W) x 33(H) / EFT-220RGB: 587(L) x 40(W) x 33(H)	
重量 Weight	560g(不含挡板 Without barn door)	



EFT860 RGB全彩多功能影视棒灯

EFT860 LED Light Tube

Continuous light source
持续光源

22



选购附件 Optional



EFT860格栅柔光箱

Softbox Grids

#1.07.061302

EFT860 RGB 全彩多功能影视棒灯金属外壳内置静音散热风机，轻松单手操控，80W 大功率输出，2000K ~ 7500K CCT 模式均衡双色温显指 > 96，可拆卸式遥控器精准控制亮度和色彩。搭配 320 颗 RGB 灯珠设计具有像素流动渐变特效可快速控光，光影氛围动态感强。配置球形锁紧支架、挡光板、控光随心可搭配锂电池手柄满足移动补光，特适用于人像发丝补光、色彩轮廓光、直播、静物拍摄、视频、VLOG 创意等专业拍摄视频需求。

EFT860 RGB LED light tube with metal shell and silent cooling fan, one-hand control, 80W high-power output, 2000K ~ 7500K CCT mode, CRI > 96, removable remote controller for accurate brightness and color control. 320 RGB light beads and pixel light effect can quickly control the light for dynamic sense of light and shadow atmosphere. Equipped with ball-head bracket and barndoor, optional with lithium battery handle, to meet move filling light, especially suitable for portrait, hair filling light, live broadcasting, still life shooting, video, VLOG and other professional shooting video needs.

规格参数 Parameters

型号 Type/ 编码 Code	EFT860 RGB / 1.05.031622
功率 power	80W(AC) / 60W(DC)
显示屏 Display	0.96"寸
光源 Light source	180颗(pcs)CCT贴片LED(chip) / 320颗(pcs)RGB贴片LED(chip)
光照度 CCT Luminous Lux(0.5m)	2700K > 6000LX / 5500K > 6500LX / 7500K > 6500LX
光照度 HSI Luminous Lux(0.5m)	红色(R) > 150LX / 绿色(green) > 600LX / 蓝色(blue) > 160LX
调光范围 Output range	0~100%
色温CCT Color temperature / 显色指数 CRI	2000K~7500K / Ra > 95
颜色范围 Color Range	色调 (HUE) : 0~360° / 亮度 (INT): 0~100% / 饱和度 (SAT): 0~100%
像素模式 Pixel mode	4位像素 Bit
光效 Light effect	1) 19种预设(Preset) 电视TV/坏灯泡Fault bulb/雷电Storm/火焰Fire/呼吸Pulse/狗仔队Paparazzi/远光灯Headlight/ 紧急求救SOS/警示灯Warning/消防车Fire engine/警灯Police/救护车Ambulance/烟花Fire work/ 派对Party/派对S Party/R 红色频闪Red multi/G 绿色频闪Green multi/B 蓝色频闪Blue multi/ RGB彩色频闪RGB multi 2) 6种自定义(Ind.) CCT循环(LoopCCT)/RGB循环(LoopRGB)/CCT频闪(FlashCCT)/RGB频闪(FlashRGB)/ CCT呼吸(PulseCCT)/RGB呼吸(PulseRGB) 3) 6种像素模式(Pixel mode) 滚动(Roll)/颜色渐变(Fade RGB)/色温渐变(Fade CCT)/跳跃(Leap)/彩虹(Rainbow)/行车(Drive)
无线通讯 Wireless communication	蓝牙 (Bluetooth)
供电模式 Power supply mode	适配器供电 (Adapter power supply): Type-C, 20V 5A (PD) 电池供电 (Battery model): NF970 X 2 续航时间 (Endurance time) > 60分钟 (Minutes)
标配附件 Accessory	遥控器(Remote control)/挡光板(barndoor)/球头吊臂(Ball head arm)
散热方式 Heat Dissipation	4风机 (Fan*4)
外壳材质 Shell material	铝合金 (Aluminum)
尺寸 (Dimensions)/重量 (Weight)	大约60(L)cm/1500g
灯体 (body)	60(L)x5(W)x5(H)cm/930g
挡光板(barndoor)	60(L)cm/430g
手柄电池盒(Handle battery box)	6(L)x3.5(W)x17.3(H)cm/135g

EFR-48/LR-480II/EFR-36 环形直播灯

EFR-48/LR-480II/EFR-36 LED Ring Light

Continuous light source
持续光源

23



规格参数 Parameters

型号 Type	EFR-48	LR-480II	EFR-36
编码 Code	1.05.031610	1.05.031620	1.05.031609
灯珠数量 LED chip	264颗 Pcs	264颗 Pcs	288颗 Pcs
输出功率 Output power	48W	48W	36W
照度 Luminous flux (0.5m)	>3000Lux	>3000Lux	>2200Lux
色温 Color temperature	2700K-7500K		
显色指数 CRI	Ra>97	Ra>97	Ra>97
调光范围 Output range	0%~100%	0%~100%	10%~100%
照射角度 Beam angle	120°		
输入电压 Sync voltage	AC 195-245V 50/60Hz		
输出电压 output voltage	DC 12-18V/5A		
适配电池盒 Battery adapter	F970手柄电池盒 Battery adapter		
锂电池 Battery	NP-F970锂电池 Lithium battery(9.WX.350088)x2		
续航 Capacity	5500K全光 Full power>90分钟 min		
USB接口 Port	USB-A x 2 / 5V 1.0A		
灯头外径 Head outer diameter	455mm (18英寸)	410mm (16英寸)	
尺寸 Dimensions	550(L)x455(W)x60(H)	500(L)x410(W)x63.5(H)	
重量 Weight	1350g	920g	

Ra>97



高显指
High CRI

T区高光美颜
Stereoscopic feeling beauty

0~100%无级调光
0-100% Adjustment



产品特点 Features

EFR36/EFR48/LR-480II 环形补光灯高清靓肤美颜，T 区高光柔光不刺眼，打造眼神光，创造柔和舒适的环境氛围，眼神灵动，轮廓立体。高显色，冷暖双色温可调。双 USB 接口，手机实时供电，搭配锂电池实现户外实景直播。小产品静物拍摄、美妆造型、直播布光、抖音自拍等必备美颜神器。

EFR36/EFR48/LR-480II ring light. For HD skin beauty, especially T zone bright and soft light. Creating nice eye light to shape more outline. High CRI and color temperature adjustable. Dual USB slot for mobile phone charging. With lithium battery to achieve outdoor live broadcast. Small products shooting, beauty modeling, live broadcast, Tiktok selfie and other essential beauty artifact.

EFP-12 双色温影视平板灯

EFP-12 Color LED Panel Light

Continuous light source
持续光源

24



高亮度
High brightness



0~100%无级调光
0-100% Adjustment



可调色温
2700~7500K



轻巧便携
Light and portable



柔和不刺眼
Soft and not harsh

规格参数 Parameters

型号 Type / 编码 Code	P12BI / 1.05.031409
功率 power	12W
显示屏 Display	LED 段码屏 22x11mm
光源 Light source(0.5m)	116颗(pcs)CCT贴片LED(chip)
光照度 Luminous Lux(0.5m)	2700K>800Lux / 5500K>950Lux / 7500K>950Lux
调光范围 Output range	0%~100%(调光精度Dimming accuracy 1%)
色温 Color temperature / 显色指数 CRI	2700K-7500K / Ra>95
光效模式 Light effect mode	内置9种预设光效 Built-in 9 preset lighting effects 电视(TV) / 坏灯泡(Fault bulb) / 雷电(Storm) / 火焰(Fire) / 呼吸(Pulse) 狗仔队(Paparazzi) / 远近灯光(Headlight) / 紧急呼救(SOS) / 警示灯(Warning)
电池容量 Battery volumn	7.4V 3000mAh锂电池(Lithium)
续航时间(Endurance time)	(全功率 Full power)>120分钟 (Minutes)
充电接口 Charging port / 电源输入 Input voltage	Type-C / 5V 2A
外壳材质 Shell material	塑料 Plastics
尺寸 Dimensions(mm)	176(L)X120(W)X23.5(H)
重量 Weight	560g

产品特点 Features

P12 双色温影视平板灯 12W 功率，环绕式发光，非灯珠直射光效均匀、柔和，亮度高达 950Lux，冷暖光随意变换，2700k-7500K 宽幅自由调节色温。3000mAh 大容量锂电池强劲续航。Type-c 快充可边充边用，液晶全功能显示亮度调节精确到 1%。广泛适用于单反相机补光、摄像、视频、婚庆拍摄、美食、珠宝拍摄夜景补光等。轻薄便携适用各种场景需求。

P12 LED panel light with Bi-color and 12W. Surrounding light output to create more soft light. Brightness is up to 950Lux, while 2700k-7500K wide adjustable color temperature. 3000mAh capacity lithium battery supports long battery life. Type-c supports lighting while charging. Built with LCD display. Brightness adjustment is accurate to 1%. It is widely used for fill light, or video, wedding shooting, food, jewelry shooting night scene fill light.



EFP-50BI 双色温LED平板灯

EFP-50 BiColor LED Panel light

Continuous light source
持续光源

25



Ra>97

高显指
High CRI



交直流两用
AC / DC use



恒定输出功率
Constant Output



无线遥控
Wireless Control



宽幅色温
2700~7500K



低噪音
Ultra Silent

规格参数 Parameters

型号 Type	EFP-50BI
编码 Code	1.05.031505
功率 Power	50W
显色指数 Ra	Ra>97
光照度 (1m)	6000Lux
内置蓝牙模块 Built-in Bluetooth	APP遥控距离 range>15m
灯珠数量 LED quantity	702颗pcs
调光范围 Power variation	1%~100%
色温 Color temperature	2700K~7500K
金贝2.4GHz无线系统 JINBEI wireless system	适配EF-RC/ EF-RGB LED遥控器 support EF-RC/ EF-RGB remote control
静音风机 Ultra silent cooling fan	<30dB
频道 CH	16个频道, CH: 00~15
组别 GR	10个组别, GR: A/B/C/D/E/F/G/H/I/J
电源 Operating	DC 15V/4A
尺寸 Dimensions(LxWxH)	320(L)x270(W)x55(H)mm
重量 Weight	1.35Kg (不含电池)

产品特点 Features

EFP-50BI LED 双色温视频摄像灯, 50W 功率高亮度布光, 702 颗高显指灯珠均匀分布, 光线扩散广, 光照柔和均匀, 1% ~ 100% 无极调光, 明暗细节精细。2700 ~ 7500k 宽幅色温调节无需更换色片。可选配锂电池室内外两用, 拍摄无后顾之忧。可满足直播灯光、视频摄像、抖音短视频、新闻采访、人像静物摄影、户外补光等多种拍摄场景需求。

EFP-50BI Bi-color LED panel with 50W power for high brightness lighting. 702pcs high CRI lamp beads uniform distribution, wide light diffusion, soft and uniform light, 1% ~ 100% dimming. 2700 ~ 7500k wide color temperature adjustment. Optional using of lithium battery can meet dual use for indoor and outdoor shooting. It's suitable for live broadcasting, video shooting, Tiktok video, news interview, portrait photography, outdoor lighting and other shooting scenes.



EFP-400BI 双色温影视柔光灯

EFP-400 BiColor LED Panel light

Continuous light source
持续光源

26



Ra ≥ 96

高显指
High CRI



交直流两用
AC / DC use



恒定输出功率
Constant Output



无线遥控
Wireless Control



双色温
2700~6000K



低噪音
Ultra Silent

规格参数 Parameters

型号 Type	EFP-400BI
编码 Code	1.05.031504-1
功率 Power	400W
显色指数 Ra	Ra ≥ 96 / TLCL > 98
光照度 (1m)	> 7000Lux
内置蓝牙模块 Built-in Bluetooth	APP遥控距离 range > 15m
LED贴片 LED quantity	3200颗 pcs
调光范围 Power variation	10%~100%
色温 Color temperature	2700K~6000K ± 100K
金贝 2.4GHz 无线系统 JINBEI wireless system	适配 EF-RC / EF-RGB LED 遥控器 support EF-RC / EF-RGB remote control
静音风机 Ultra quiet cooling fan	< 30dB
频道 CH	32个频道, CH: 00~31
组别 GR	16个组别, GR: A/B/C/D/E/F/G/H/I/J/L/O/P/Q/S/U
电源 Operating	95~245V
尺寸 Dimensions (LxWxH)	800(L) x 520(W) x 110(H) mm
重量 Weight	11Kg

产品特点 Features

EFP-400BI LED 双色温视频摄像灯采用航空铝材坚韧耐热，机身 360 度旋转，灵活性多样布光。400W 大功率在 2700 ~ 6000k 色温调节范围内光线平稳恒定、无频闪，色彩还原真实，饱和度高。全功能无线遥控调节。搭配锂电池拍摄省心。适用于专业影视广告、新闻演播室、直播采访、网络授课、婚礼现场及大场景拍摄等多种应用场景。

EFP-400BI Bi-color LED panel with aviation aluminum shell and high heat dissipation. Rotated 360 degrees is flexible for different use condition. 400W high power with 2700 ~ 6000k color temperature adjustment creates stable and constant light, no stabs, true color restoration, high saturation. Full function wireless remote control adjustment. With lithium battery, shooting is easy. It is suitable for professional film and television advertising, news studio, live interview, network teaching, wedding scene and large scene shooting and other application scenarios.



3200颗专业型LED贴片
高亮度/散热快/无频闪

400W 功率 ——— 3200 颗LED ——— 7000Lux 光照度 ——— > 98 TLCI

直播带货

Live Broadcasting



视频拍摄 新闻采访

Video Shoot News Interview



P-80BI/P-80RGB 平板灯

P-80 Color LED Panel light

Continuous light source
持续光源

28




规格参数 Parameters

型号 Type / 编码 Code	P80BI / 1.05.031411	P80RGB / 1.05.031412
功率 power	80W	
显示屏 Display	LCD 段码屏	2.4寸 彩屏
光源 Light source	P80BI 720颗(pcs)CCT贴片LED(chip) P80RGB 720颗(pcs)CCT贴片LED(chip) / 180颗(pcs)RGB贴片LED(chip)	
光照度 CCT Luminous Lux (0.5m)	裸测(Naked measurement) 2700K>33000Lux/5500K>36000Lux/7500K>36000Lux 加柔光板(Soft diffuser) 2700K>14000Lux/5500K>15000Lux/7500K>15000Lux	
光照度 HSI Luminous Lux (1.0m)	加柔光板(Soft diffuser) 红色(R)>800Lux / 绿色(Green)>1400Lux / 蓝色(Blue)>250Lux 黄色(Yellow)>400Lux / 青色(Cyan)>500Lux / 品红(Magenta)>240Lux	
调光范围 Power variation	0~100%	
色温CCT Color temperature	2700K~7500K	2000K~7500K 色温补偿 Color temperature compensation G/m:±/-1.0
RGB全彩模式 RGB mode (仅Only P80RGB)	0~359	
预设光效 Preset lighting effects	P80BI 内置9种预设光效 Built-in 9 preset lighting effects 电视(TV)/坏灯泡(Fault bulb)/烟花(Fire work)/雷电1、2、3(Storm)/闪光1、2、3(Flash) P80RGB 内置20种预设光效 Built-in 20 preset lighting effects 雷电(Storm)/呼吸(Pulse)/电视(TV)/坏灯泡(Fault bulb)/火焰(Fire)/狗仔队(Paparazzi) 远近光灯(Headlight)/紧急求救(SOS)/消防车(Fire engine)/警示灯(Warning) / 警灯(Police) 救护车(Ambulance)/烟花(Fire work)/派对“快”(Party“Fast”)/派对“慢”(Party“Slow”) “R”红色频闪(Red multi)/“G”绿色频闪(Green multi)/“B”蓝色频闪(Blue multi) “RGB”彩色频闪(Warning)/色温循环(Color temperature cycle) 6种自定义 Ind. CCT循环(Cycle)/HUE循环(Cycle)/CCT频闪(Multi)/HUE频闪(Multi)/CCT呼吸(Pulse)/HUE呼吸(Pulse)	
无线通讯 Wireless communication	2.4G / 蓝牙 Bluetooth	
供电模式 Power supply modes	适配器供电(Adapter power supply):DC 24V 4A 电池供电(Battery model):NF970X2 续航时间(Endurance time)>60分钟 Minutes	
外壳材质 Shell material	铝合金 Aluminum alloy	
尺寸 Dimensions(mm) / 重量 Weight	435(L) x 357(W) x 58(H) / 3335g	

P80BI 双色温摄影补光灯, P80RGB 全彩影视补光灯全铝合金外壳, 采用菲涅尔反射透镜大幅提升照度和扩光度使光线硬柔适中。80w 高功率选用超静音导热风机提供散热减少拍摄现场噪音干扰。LED 操控屏内置无线遥控系统和蓝牙 APP, 2700 ~ 7500K 可调宽域冷暖色温, 输出精度 0 ~ 100%。专业 RGB 全彩调节色温色相还原标准, 色饱和度和优质的显色指数提供创意摄影视频, 炫彩光效。适用于直播补光、人像摄影、创意影视、新闻演播室等多种应用场景。

P80BI Bi-color LED panel and P80RGB full-color LED panel are all used aluminum alloy shell. By using Fresnel lens to greatly improve the illumination. 80w high power use of ultra-quiet cooling fan to improve heat dissipation and reduce the noise interference of the shooting scene. LED control screen, built-in wireless remote control system and Bluetooth for APP control, 2700 ~ 7500K adjustable wide range of color temperature, output accuracy 0 ~ 100%. Professional RGB full color adjustment system include HSI and CCT, color saturation and high quality color rendering index to provide creative photography video, dazzling light effect. It is suitable for live broadcasting, portrait photography, creative film and television, news studio and other application scenarios.

选购附件 Optional



P80格棚柔光箱
Softbox Grids
#1.07.061301



S-30延长杆
Extension bar
#1.09.091403





利用手机和灯光自带的蓝牙功能，可实现人机互动、无线遥控。通过 Jinbei APP 可对金贝自带蓝牙功能的引闪器、LED 影视灯进行无线控制及多灯联动，实时调整灯光参数、自定义光效，适配影棚拍摄、直播间布光、片场工作流的便捷操控需求。

Link the device with Bluetooth function to match Jinbei App for wireless remote control. Jinbei App supports the link between triggers and LED lights which built-in Bluetooth, and supports multiple lights working together by setting lights output, effects, etc. It's convenient to use in live broadcasting, studio shooting, filming shooting scenarios.



Android

手机浏览器扫描二维码
下载并安装金贝APP。
Download and install
JINBEI APP via scan
QR code



iPhone

在苹果应用商店搜索
“jinbei”下载并安装
金贝APP。
Search for “jinbei”
in Apple's app
store download and
install the JINBEI
APP



CCT

CCT模式支持宽广色温范围调节，匹配不同的冷暖氛围需求。
CCT mode supports wide range of color temperature control to create cold or warm shooting atmosphere.



HSI

HSI通过对色相 (H)、饱和度 (S)、亮度 (I) 进行精确调整。
Support HUE, SAT, INT accurate control



FX

FX光效可根据场景需求，选择多种光效模式模拟拍摄场景。
FX light effects can simulate different scenarios



群组
Group

可根据灯光设备新建群组，更加快捷管理、调节各组别灯光。
Create different groups for fast light set-up control



编程
Program

可以通过编程功能完成光与光之间的互动与串联，形成一套光的表演。
Program function to create a set of light's move to match the demand of video record



存储
Save

存储当前整个群组中设备的亮度、色温。
Save the light set-up data, including CCT, brightness, etc.



扫码
Scan

扫他人分享的二维码，可直接同步所有设备的参数设置。
Scan the QR code from others and sync the light set-up data, including CCT, brightness, etc.



导入
Input

导入之前已经存储的整个群组中设备的亮度、色温
Input the saved light set-up data, including CCT, brightness, etc.



分享
Share

创建分享向二维码，分享当前整个群组中设备的亮度、色温设置。
Share the light set-up data to others, including CCT, brightness, etc.

金贝APP连接闪光灯（引闪器flash）

1、首先正常使用引闪器连接闪光灯，当需要更加快捷调节引闪器参数时；可以将引闪器蓝牙功能打开——例如Q7II长按“C.Fn”进入菜单，设置蓝牙开启“ON”。

Switch on Bluetooth in the trigger. For example of Q7II, long press C.FN button and find Bluetooth function to switch on.

2、打开金贝APP，选择闪光灯模式

Open Jinbei App and select Flash mode

3、点击选择对应的引闪器型号即连接成功，跳转引闪器设置界面；即可大屏操控闪光灯。

Click the Bluetooth icon the open the device list and select the trigger's name.

金贝APP连接影视灯（常亮灯）

1、开启影视灯蓝牙图标


Turn on Bluetooth on light

2、打开手机蓝牙功能，点击进去金贝APP，选择影视灯，需要让影视灯发射信号源，APP即可自动搜索附近的灯光进入连接状态。

Click “+” icon in LED mode to appear the searching list, and find the LED light needed to be linked.

3、灯光设备区就会显示搜索到的灯光设备型号，可以自定义名称、开启关闭、删除等。点击型号名称可以直接进入调节窗口，调节CCT、HSI、FX参数。

After link, device can be renamed, deleted. Click the name of LED lights to go into the menu for detailed settings.

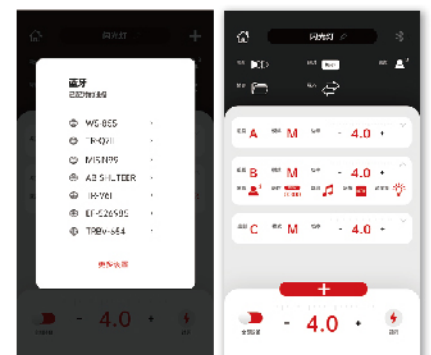

金贝标准三爪卡口反光罩

Jinbei Standard Mount Reflector

Photographic Accessories
摄影附件

30



EF-LED强力反光罩
EF-LED Power reflector
φ18cm H:14cm
60°照射角度 Beam
#1.08.011204



M9专业反光罩
Professional reflector
φ24cm H:19.5cm
70°照射角度 Beam
#1.08.011202



MII-束光筒 (两个口径蜂窝网)
Conical snoot
φ8cm φ6.2cm H:25cm
#1.08.041102



金贝标准卡口
Jinbei Standard Mount

束光筒简称猪嘴，锥形约束光线缩小照射范围，加蜂窝网格产生平行光使光型明暗反差强，更好的拍摄人物、静物产品局部形状的轮廓。光线质感强适用于人像发丝光，低调人像局部用光。产品拍摄明暗质感表现力强，阴影清晰，细节锐度高。

The conical snoot creates more concentrate light. With the honey comb, light orientation improved an enhanced light ratio and make it perfect for outlining the portrait, still light or more. It can be used to highlight the hair, or specific zones with it for more contrast, light and shade ratio and sharpness.

大直径深口设计送光远，强度高，光照均匀，反光罩内进行多次交叉反射，光线均匀且层次丰富，增强立体感，27mm 导光槽，精准控光光线饱和度高，轮廓清晰。适配旗板、柔光屏、硫酸纸、挡光板、蜂窝网。

With its 24cm parameter and 19cm depth design, this reflector transmits the long-range, high-intensity and even light. After multiple cross-reflecting inside the reflector, the light is even, rich in texture and enhances the vividness of the scene. With the 27mm light guide, it can precisely control the light orientation. It can also work with diffuser flag, diffuser board, diffuser papers and honey comb that make it perfect for commercial portrait, art photography, still life or other professional applications.

选配 Optional:

M-9专业反光罩蜂窝网
Honey comb



M-9四页挡板套装
Reflector barndoor
#1.08.031603



10° 蜂窝网
1.08.031604



30° 蜂窝网
1.08.031602



60° 蜂窝网
1.08.031601



EF-30°~60°变焦反光罩
Zoom reflector
φ24cm H:29.7cm
30°~60°照射角度 Beam
#1.08.011205



一罩两用，双重变焦、浅口 + 深口送光距离可控。光照角度广、高亮、送光距离远，光比反差大，立体感强。采用弧面反射高亮鳞甲纹设计，光线反射均匀。25mm 导光槽精准控光，轮廓清晰。适用于 EF 系列影视灯，可选配旗板、柔光屏满足摄影、直播、视频、微电影布光专业需求。

The zoom reflector is designed to satisfy your multiple needs. It transmits the long-range, high-intensity and even light. After multiple cross-reflecting inside the reflector, the light is even, rich in texture and enhances the vividness of the scene. With the 27mm light guide, it can precisely control the light orientation. It is compatible with EF series LED studio lights and can also work with diffuser flag and diffuser board that makes it perfect for photography, live streaming, video shooting, movies or other professional applications.

EF-ZF3(20°)/(40°)调焦聚光筒

EF-ZF3 Fresnel Spot Snoot

Photographic Accessories
摄影附件

31



规格参数 Parameters


型号 Type	EF-ZF3调焦聚光筒(20°)	EF-ZF3调焦聚光筒(40°)
编码 Code	1.08.041306	1.08.041309
前镜片 Front lens	φ81mm	φ81mm
尺寸 Dimensions(mm)	110X325X195	110X325X195
重量 Weight	2Kg	2Kg



20°/40°专业成像调焦镜头

适配灯型 Support models

金贝300W功率以下EF影视灯(含300W)
金贝影室闪光灯(仅限使用led造型灯的闪光灯使用)

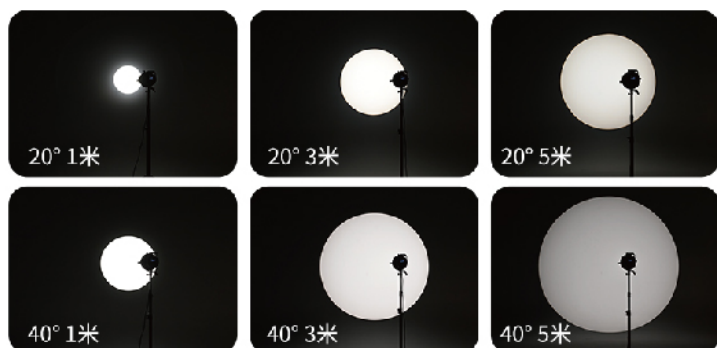

标准配件 Standard accessories



造型片夹
Gobo holder

金属造型片*16
Gobo*16

色片夹
Gel holder

色纸*5
Gels*5

便携包
Carry bag

百变光效 · 创意造型

Variable light effect · Creative modeling

EF-ZF6 菲涅尔变焦聚光筒

EF-ZF6 Fresnel Spot Snoot

Photographic Accessories
摄影附件

32



20°



30°



45°



28500Lux



25500Lux



18800Lux

EFII-300影视灯2米距离

ZF6 菲涅尔变焦聚光筒采用 152mm 菲涅尔透镜约 11 倍裸灯照度精准控光, 20° ~ 45° 后置变焦调节焦距不影响控光, 可获得理想的虚实光源。可灵活搭配四页挡光板、四色色片玩转各类创意光影。广泛适用背景特效、人物、产品拍摄塑造轮廓光、发丝光造型, 满足专业摄影创作光影虚实艺术效果。

ZF6 Fresnel Spot Snoot adopts 152mm Fresnel lens to create about 11 times brightness than naked light. 20° ~ 45° rear zoom adjusts focal length can obtain the ideal virtual and solid light source. It can be flexibly matched with four-leaf barn door and color gels to play various creative light and shadow. Widely used in background special effects, characters, product shooting, shaping light, hair light, to meet the professional photography creation of light and shadow art effect.

规格参数 Parameters

型号 Type	EF-ZF6菲涅尔变焦聚光筒 ZF6 fresnel spot snoot
编码 Code	1.08.041308
透镜尺寸	152mm(6英寸)菲涅尔透镜
变焦角度 Angle	20°~45°
变焦形式 Zoom structure	后变焦 (透镜不旋转) Back shell zoom (No rotate lens)
卡口 Mount	金贝标准卡口 Jinbei Standard Mount
尺寸 Dimensions(mm)	145(L)Xφ182mm
重量 Weight	1.7Kg

标准配件 Standard accessories



ZF-6菲涅尔变焦聚光筒
ZF6 Fresnel Spot Snoot



四页挡光板
4-leaf Barn door



四色色片
4 color gels



色片固定环
Gel holder



收纳便携包
Carry bag



M系列 普及型柔光箱

M Softbox

Photographic Accessories
摄影附件

33

柔光箱的作用是将点光源转变为面光源，使光质柔和，容易控制光线照射位置，明暗过渡有层次产生立体感。柔光箱不同的尺寸大小决定了光照范围通过距离来控制光的软硬程度。通常八角柔光箱作主光和顶光，方形柔光箱作辅光和底光，长条柔光箱作轮廓光。


The role of the soft box is to transform the point light source into a surface light source, so that the light quality is soft, it is easy to control the position of the light irradiation, and the transition of light and dark has a three-dimensional sense. The different sizes of the soft box determine the light range through the distance to control the soft and hard degree of light. Usually the octagonal soft box is the main light and top light, the square soft box is the auxiliary light and the bottom light, and the long soft box is the outline light.



柔光箱 softbox

尺寸 Dimensions: 60x60/60x90/70x100/80x120/70x140cm

M-60x60 #1.07.031101	M-60x90 #1.07.031102
M-70x100 #1.07.031103	M-80x120 #1.07.031105
M-70x140 #1.07.031106	

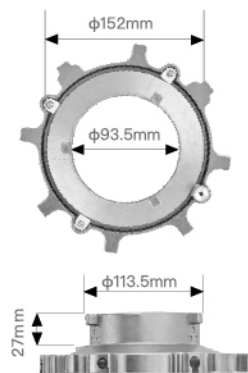

八角柔光箱 Octagonal softbox

尺寸 Dimensions: $\phi 95/\phi 120/\phi 140$ cm

M-950 #1.07.031107	M-1200 #1.07.031109	M-1400 #1.07.031108
--------------------	---------------------	---------------------



弧形骨架设计

Curved frame design

专业的弧形骨架设计，光线均匀、柔和、色彩饱和度高、光质细腻。Professional curved skeleton design, uniform light, soft, high color saturation, delicate light quality.



橘皮压花反光面料

Orange peel embossed reflective fabric

反光均匀保证光线在内部交叉反射达到均匀的出光效果。银色面料涂层不掉落。

Uniform reflection ensures that the light is cross-reflected in the interior to achieve a uniform light effect. Silver fabric coating does not drop.



双层柔光布


Double soft cloth

内层柔光布形成二次反射，使柔光箱光照均匀，中心于四角的光比小于 0.5 级光圈。

The inner layer of soft light cloth forms a secondary reflection, so that the light of the soft light box is uniform, and the light ratio in the center of the four corners is less than 0.5 aperture.

DM系列 柔光箱

DM Softbox

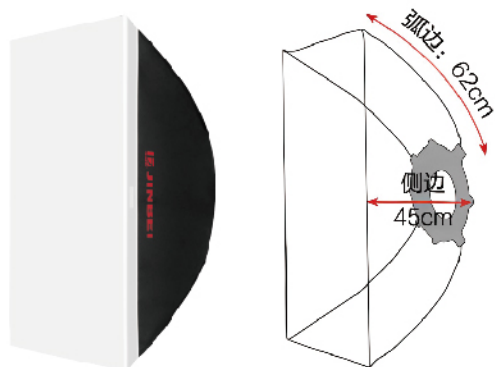


DM-60x90 柔光箱 Softbox

#1.07.021107 60x90cm



DM-90 八角柔光箱 Octagonal softbox

#1.07.021106 $\phi 90$ cm

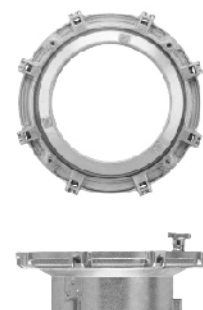


KE90/120 快装深抛柔光箱/格栅

KE90/120 Softbox/Grid

#1.07.051120 / #1.07.051205

#1.07.051121 / #1.07.051206

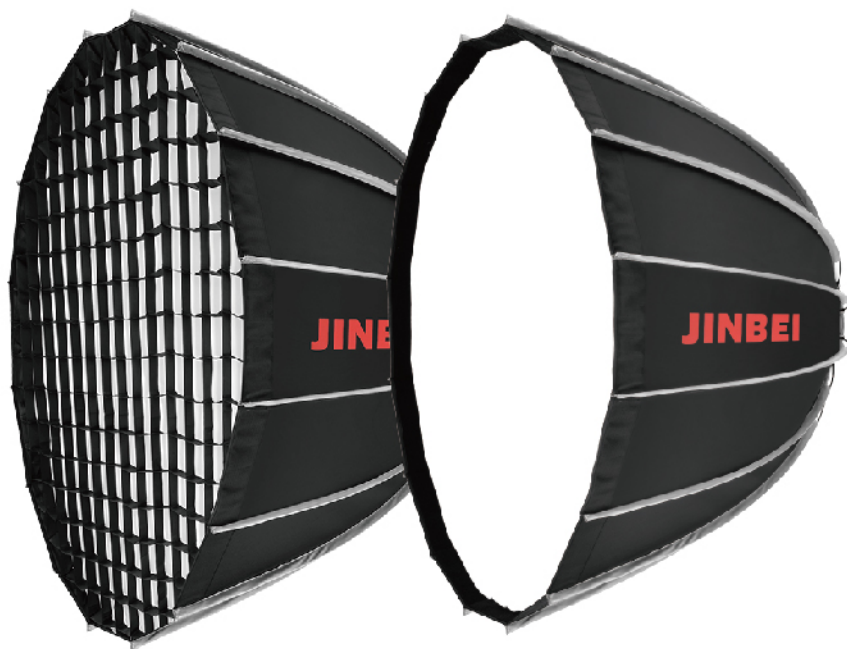

深口抛物线柔光箱采用抛物线设计深度大，光线交叉密度均匀层次感丰富，定向控光，明暗清晰，送光距离远。格栅具有约束光线、平行送光，光线隔离更清晰使立体感更强。KE 专业柔光箱采用快装卡盘设计，选用专业反光布和柔光面料，装拆收合更便捷。满足人像摄影、直播视频专业要求。

Deep polishing soft box adopts parabola design depth, light cross density uniform layer sense rich, directional light control, clear light and dark, long light sending distance. The grille has a constraint light, parallel light transmission, clearer light isolation and stronger three-dimensional sense. KE professional soft box adopts quick loading chuck design, selection of professional reflective cloth and soft fabric, assembly and disassembly more convenient. Meet the professional requirements of portrait photography and live video.



一拉一压 快速装卸 Pull and pressure fast loading and unloading


标准配件 Standard accessories

柔光箱*1
Soft Box

套装包*1
Kit Bag

内层柔光布*1
Inner Soft Cloth

外层柔光布*1
Outer Soft Cloth

格栅 (另购)
Grid (purchased separately)

金贝标准卡口
Jinbei Standard Mount

KE系列 深口柔光箱-盘杆一体快速安装

KE Deep Quick Open Softbox


Photographic Accessories
摄影附件

35



KE-60x90
专业柔光箱/柔光箱格栅
Softbox/Grid
#1.07.051115 #1.07.051201
尺寸 Dimensions: 60x90cm

KE-70x100
专业柔光箱/柔光箱格栅
Softbox/Grid
#1.07.051116 #1.07.051202
70x100cm

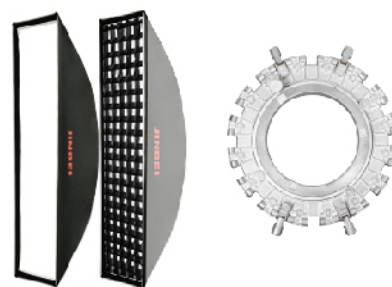


KE-25x100
专业格栅柔光箱
Softbox with Grid
#1.07.051112
25x100cm

KE-35x140
专业格栅柔光箱
Softbox with Grid
#1.07.051113
35x140cm




KE-40x180
专业格栅柔光箱
Softbox with Grid
#1.07.051114
40x180cm

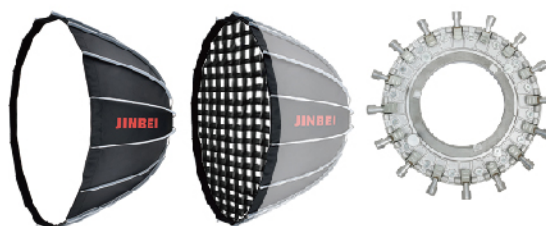


KE-90
深口柔光箱/柔光箱格栅
Softbox/Grid
#1.07.051120 #1.07.051205
尺寸 Dimensions: φ90cm

KE-120
深口柔光箱/柔光箱格栅
Softbox/Grid
#1.07.051121 #1.07.051206
φ120cm

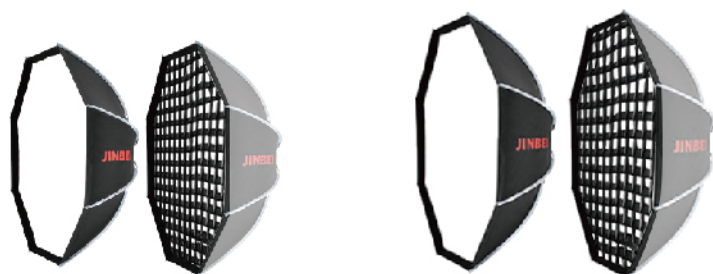

KE-100专业八角柔光箱/柔光箱格栅
Octagonal softbox/Grid
#1.07.051118 #1.07.051203
φ100cm

KE-120专业八角柔光箱/柔光箱格栅
Octagonal softbox/Grid
#1.07.051117 #1.07.051207
φ120cm

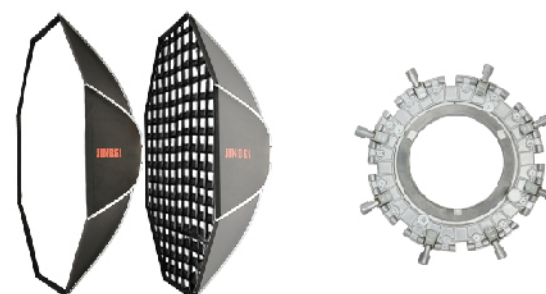

KE-150专业八角柔光箱/柔光箱格栅
Octagonal softbox/Grid
#1.07.051119 #1.07.051204
φ150cm

型号	高度	宽度	深度	弧边	收合高度
KE-60x90	90cm	60cm	47.5cm	65cm	72cm
KE-70x100	100cm	70cm	45.5cm	70cm	74cm
KE-25x100	100cm	25cm	40.5cm	55cm	58cm
KE-35x140	140cm	35cm	48cm	81cm	84cm
KE-40x180	180cm	40cm	58.5cm	100cm	90cm

型号	直径	深度	弧边	收合高度	导光槽
KE-90	φ90cm	62cm	70cm	76cm	5cm
KE-120	φ120cm	72cm	86cm	92cm	5cm
KE-100	φ100cm	47cm	60cm	65cm	5cm
KE-120	φ120cm	45cm	65cm	72cm	5cm
KE-150	φ150cm	56cm	82cm	90cm	5cm

φ56/65/85/100/120cm 柔光球

Quick ball softbox

Photographic Accessories
摄影附件


36




产品特点 Features

金贝球型柔光罩采用高密度专业柔光标准色温的面料，近似 360° 全方位照射无影效果，光柔且不刺眼，结合 LED/COB 点光源，光线照射中心点高光到边缘层次感丰富，光损小色彩饱和度高。灯笼造型设计一拉一按，安装拆卸易如反掌。适合直播、视频拍摄、人像摄影等补光产品及各类直播拍摄需求。

Jinbei quick ball softbox adopts high-density professional soft light standard color temperature fabric, approximately 360° all-round irradiation for shadowless effect. Light soft and not harsh, combined with LED/COB light source, light irradiation center highlight to edge layer rich, light loss small color saturation. Lantern design with a pull-press structure, easy to install and disassemble. Suitable for live broadcasting, video shooting, portrait photography and other fill light products and all kinds of live shooting needs.

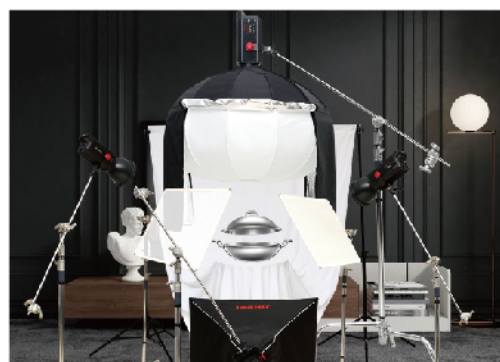

安装说明: Installation instructions



1. 将撑杆垂直放入柔光布中间的圆形底座中。
Place the keel vertically into the middle of the soft cloth.



2. 用手拉起柔光布不放，手掌按住柔光箱接环并向下压。
Pull up the soft light cloth by hand, press the soft light box mount with the palm and press down.



3. 支撑骨架底部的固定搭扣勾在中间的支撑杆定位槽中。
Hook the fixed buckle at the bottom of the supporting skeleton to the positioning slot of the supporting rod in the middle.

Hook the fixed buckle at the bottom of the supporting skeleton to the positioning slot of the supporting rod in the middle.



4. 用手指推压柔光布内的撑杆，使其与柔光布上的竖条经位线对齐。
Push the pole inside the soft cloth with fingers to align it with the vertical warp line on the soft cloth.

Push the pole inside the soft cloth with fingers to align it with the vertical warp line on the soft cloth.

65/85/105cm 深抛柔光箱


Deep Beauty Dish Softbox

Photographic Accessories
摄影附件

37

深口抛物线柔光箱采用抛物线设计深度大，光线交叉密度均匀层次感丰富，定向控光，明暗清晰，送光距离远。格栅具有约束光线、平行送光，光线隔离更清晰使立体感更强。KE专业柔光箱采用快装卡盘设计，选用专业反光布和柔光面料，装拆收合更便捷。满足人像摄影、直播视频专业要求。

Deep polishing soft box adopts parabola design depth, light cross density uniform layer sense rich, directional light control, clear light and dark, long light sending distance. The grille has a constraint light, parallel light transmission, clearer light isolation and stronger three-dimensional sense. KE professional soft box adopts quick loading chuck design, selection of professional reflective cloth and soft fabric, assembly and disassembly more convenient. Meet the professional requirements of portrait photography and live video.

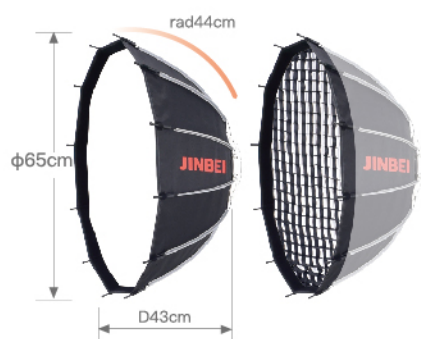

65CM深抛柔光箱/柔光箱格栅

Soft/Grid

#1.07.081131 #1.07.041226

φ65cm rad44cm D43cm




85CM深抛柔光箱/柔光箱格栅

Soft/Grid

#1.07.081132 #1.07.041227

φ85cm rad58cm D51cm

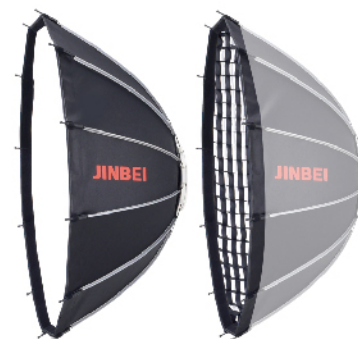

105CM深抛柔光箱/柔光箱格栅

Soft/Grid


#1.07.081130 #1.07.041228

φ105cm rad63.5cm D52cm



球型柔光罩

Quick Ball Softbox

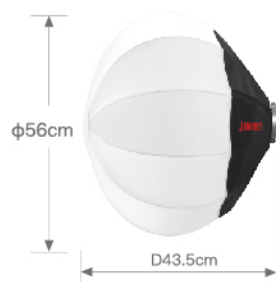

φ56球型柔光罩

Quick ball softbox

φ51cm D43.5cm

#1.08.021110

φ65球型柔光罩

Quick ball softbox

φ65cm D56cm

#1.08.021103

φ85球型柔光罩

Quick ball softbox

φ85cm D72cm

#1.08.021104



φ100球型柔光罩

Quick ball softbox

φ100cm D67cm

#1.08.021106

φ120球型柔光罩 (含遮光布)

Quick ball softbox

φ120cm D81.5cm

#1.08.021107

φ100柔光罩遮光布

Light control skirt for
100cm quick ball softbox

#1.08.051204



深口直反射 柔光箱

Deep Reflective Softbox

Photographic Accessories
摄影附件

38



φ90深口直反射柔光箱
(含格栅)

φ90cm Deep Reflective
Softbox (with Grid)
#1.07.081123
φ90cm



φ90深口直反射柔光箱
格栅

φ90cm Deep Reflective
Softbox Grid
φ90cm


深口直反射柔光箱具有直射柔光箱又有反射伞的作用，送光距离远，光效面积大，一般用于主光、填充光、平行及动态抓拍。

Deep reflection soft box has the function of direct soft box and reflective umbrella, the light sending distance is far, the light effect area is large, and it is generally used for main light, fill light, parallel and dynamic capturing.



φ120深口直反射柔光箱
(含格栅)

φ120cm Deep Reflective
Softbox (with Grid)
#1.07.081124
φ120cm



φ120深口直反射柔光箱
格栅

φ120cm Deep Reflective
Softbox Grid
φ120cm



φ90/φ120深口直反射柔光箱
——反射应用

Application

φ90cm/φ120cm
(选配深口柔光箱反射应用套件)
(Optional zoom focusing system)



φ140深口直反射柔光箱
(含格栅)

φ140cm Deep Reflective
Softbox (with Grid)
#1.07.081125
φ140cm



φ140深口直反射柔光箱
格栅

φ140cm Deep Reflective
Softbox Grid
φ140cm



φ140深口直反射柔光箱
——反射应用

Application

尺寸 Dimensions: φ140cm
(标配深口柔光箱反射应用套件)
(With zoom focusing system)



深口柔光箱反射应用套件


Zoom focusing system

#1.07.081127

TD-180 深口抛物线太阳伞

TD-180 Deep Parabolic Umbrella

#3.10.041402

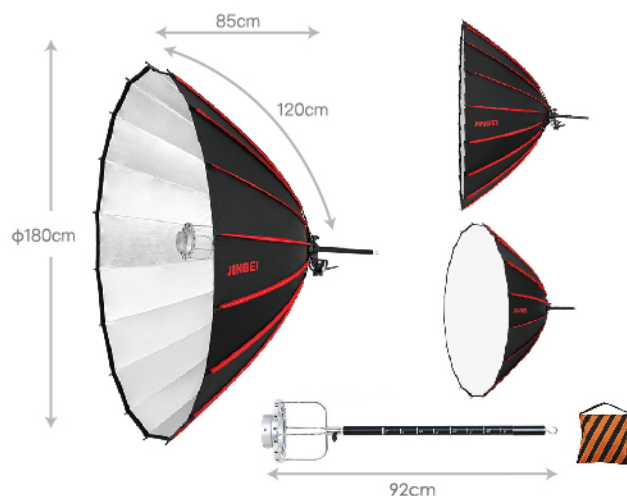



HD-15x21中型柔光屏
Folding frame scrim diffuser

#3.11.031401

尺寸 Dimensions: 150x210cm

适用灯架

Recommend for:

CK-1/CK-2/JF-238A灯架



HD-240 中型柔光屏/HD-300 大型柔光屏
Folding frame scrim diffuser

#3.11.031402 #3.11.031403

240x240cm / 300x300cm

适用灯架 Recommend for:

CK-1/CK-2/JF-238A

MF-3000F/JB-4200

M-8重型影视两用灯架



LH-75x90不锈钢旗板

Frame scrim diffuser

#3.11.031501 75x90cm

LH-75x90黑色旗板吸光布

Black cloth

#3.11.031506

推荐配置 Recommended:

CK-1/CK-2/JF-238A灯架

JB11-038A多功能圆饼夹

CK-2圆饼夹/CK横杠

旗板、柔光屏光线均匀柔和、光比大层次丰富、质感强。可选配吸光布，提升立体感。

灯与被摄物之间灵活调节距离，起到光线柔硬的作用。通常配合反光灯罩，灵活控光满足不同的人像产品拍摄专业要求。

Flag plate, soft light screen light is uniform and soft, light is rich in layers and strong texture. Optional light absorbing cloth, enhance the three-dimensional sense.

The distance between the lamp and the subject is flexibly adjusted to play the role of soft and hard light. Usually with reflective lampshade, flexible light control to meet the professional requirements of different portrait products.

手机支架

Mobile Phone Stents

Photographic Accessories
摄影附件

40



EQ-1单冷靴手机夹
Phone clamp with single cold-shoe
#3.09.011205



EQ-2旋转手机夹
Rotatable phone clamp (2022 version)
#3.09.011203-1



EQ-3双头冷靴手机夹
Phone clamp with 2 cold-shoe
#3.09.011204



PF-1补光灯手机夹
Phone clamp
#3.09.011206



L-22带球台迷你台架
Desk tripod with ball mount
#3.09.011403



MT-28迷你桌面三脚架
Extendable desk tripod
#3.09.011405

产品案例 Product case



H-13桌面直播翻拍支架

H-13 desk tripod

H:130mm #3.09.011404



DH-140小滑轮直播灯架

DH-140 ring light stand with wheel

H:1400mm #1.09.031308



DH-140小滑轮直播灯架
Light stand with wheel

#1.09.031308

- Ⓐ 1400mm
- Ⓑ 510mm
- Ⓒ 510mm
- Ⓓ $\phi 16/20/24/28$
- Ⓔ 680mm
- Ⓕ 3Kg
- Ⓖ 1.3Kg



L-2000A/2400A折叠铝灯架
Folding stand

#1.09.031301 #1.09.031302

- Ⓐ 2150mm
- Ⓑ 500mm
- Ⓒ 500mm
- Ⓓ $\phi 13/16/19/22/25$
- Ⓔ 640mm
- Ⓕ 3Kg
- Ⓖ 1.0Kg
- Ⓐ 2200mm
- Ⓑ 560mm
- Ⓒ 575mm
- Ⓓ $\phi 19/22/26/29.5$
- Ⓔ 760mm
- Ⓕ 4.5Kg
- Ⓖ 1.54Kg



EQ-3双头冷靴+摄影灯架套装
Double cold boots + stand set

EQ-3双头冷靴手机夹
#3.09.011204

EQ-190摄影灯架
#1.09.031501-1

EQ-3灯架袋
#1.12.011303



EQ-190摄影灯架
Steel stand

#1.09.031501-1

- Ⓐ 2000mm
- Ⓑ 730mm
- Ⓒ 705mm
- Ⓓ $\phi 19/22/25$
- Ⓔ 880mm
- Ⓕ 3.5Kg
- Ⓖ 0.9Kg



EQ-200便携摄影灯架
Aluminium stand

#1.09.031503

- Ⓐ 2100mm
- Ⓑ 820mm
- Ⓒ 690mm
- Ⓓ $\phi 16/19/22$
- Ⓔ 800mm
- Ⓕ 4Kg
- Ⓖ 1.25Kg



EQ-220便携摄影灯架
Aluminium stand

#1.09.031504

- Ⓐ 2200mm
- Ⓑ 890mm
- Ⓒ 780mm
- Ⓓ $\phi 19/22.5/25$
- Ⓔ 1020mm
- Ⓕ 4.5Kg
- Ⓖ 1.5Kg



EQ-250摄影灯架(钢管)
Steel stand

#1.09.031506

- Ⓐ 2500mm
- Ⓑ 1050mm
- Ⓒ 870mm
- Ⓓ $\phi 22/25/30$
- Ⓔ 1100mm
- Ⓕ 5Kg
- Ⓖ 1.95Kg



JB-280摄影灯架(钢管)
Steel stand

#1.09.041203

- Ⓐ 2800mm
- Ⓑ 1140mm
- Ⓒ 955mm
- Ⓓ $\phi 25/30/35$
- Ⓔ 1200mm
- Ⓕ 6Kg
- Ⓖ 2.3Kg



JB-300型铝灯架
Aluminium stand

#1.09.041301

- Ⓐ 3000mm
- Ⓑ 1200mm
- Ⓒ 1040mm
- Ⓓ $\phi 25/30/35$
- Ⓔ 1200mm
- Ⓕ 7Kg
- Ⓖ 2.3Kg



专业气垫铝灯架

Air Cushion Aluminum Light Stand

Photographic Accessories
摄影附件

42

MZ-2400专业气垫铝灯架 Air-cushion aluminium stand #1.09.041701

- Ⓐ 2400mm
- Ⓐ 1050mm
- Ⓜ 890mm
- ⊙ $\phi 20/25/30$
- ⊙ $\phi 22mm$
- Ⓜ 1040mm
- Ⓢ 6Kg
- Ⓢ 1.9Kg

MZ-3000专业气垫铝灯架 Air-cushion aluminium stand #1.09.041702

- Ⓐ 3000mm
- Ⓐ 1260mm
- Ⓜ 1045mm
- ⊙ $\phi 25/30/35$
- ⊙ $\phi 22mm$
- Ⓜ 1200mm
- Ⓢ 8Kg
- Ⓢ 2.7Kg

MZ-3800专业气垫铝灯架 Air-cushion aluminium stand #1.09.041703

- Ⓐ 3800mm
- Ⓐ 1285mm
- Ⓜ 1070mm
- ⊙ $\phi 25/30/35/40$
- ⊙ $\phi 25mm$
- Ⓜ 1200mm
- Ⓢ 10Kg
- Ⓢ 3.3 Kg

MZ-4800专业气垫铝灯架 Air-cushion aluminium stand #1.09.041704

- Ⓐ 4800mm
- Ⓐ 1360mm
- Ⓜ 1145mm
- ⊙ $\phi 20/25/30/35/40$
- ⊙ $\phi 25mm$
- Ⓜ $\phi 1200mm$
- Ⓢ 10Kg
- Ⓢ 3.6Kg



JB-2600FP气垫铝灯架 Aluminium stand #1.09.041401-1

- Ⓐ 2650mm
- Ⓐ 1060mm
- Ⓜ 910mm
- ⊙ $\phi 22.5/26/29.5$
- ⊙ $\phi 22mm$
- Ⓜ 1060mm
- Ⓢ 7Kg
- Ⓢ 1.9Kg



JB-3000FP气垫铝灯架 Aluminium stand #1.09.041402

- Ⓐ 3000mm
- Ⓐ 1250mm
- Ⓜ 1040mm
- ⊙ $\phi 25/30/35$
- ⊙ $\phi 22mm$
- Ⓜ 1200mm
- Ⓢ 7Kg
- Ⓢ 2.4Kg



旋转式斜臂两用灯架

2-in-1 Use Rotatable Light Stand

Photographic Accessories
摄影附件

43

M-3旋转式斜臂灯架

Rotatable stand

#1.09.051302

- Ⓐ 5000mm
- Ⓑ 1400mm
- Ⓒ 1210mm
- Ⓓ $\phi 20/25/30/35/40$
- Ⓔ $\phi 25\text{mm}$
- Ⓕ 1200mm
- Ⓖ 10Kg
- Ⓗ 4.3Kg
- Ⓖ 1220~2210mm



M-II旋转式斜臂灯架

Rotatable stand

#1.09.051303-1

- Ⓐ 4000mm
- Ⓑ 1350mm
- Ⓒ 1180mm
- Ⓓ $\phi 21/25/30/35$
- Ⓔ $\phi 22\text{mm}$
- Ⓕ 1030mm
- Ⓖ 8Kg
- Ⓗ 4.3Kg
- Ⓖ 1140~2115mm



DBJ-1中号灯架

Boom Light Stand

#1.09.061101

- Ⓐ 1500mm
- Ⓑ 850mm
- Ⓒ 1100mm
- Ⓓ 1250~2180mm
- Ⓓ $\phi 30/35\text{mm}$
- Ⓔ $\phi 25\text{mm}$
- Ⓖ 7Kg
- Ⓗ 9Kg
- Ⓕ 900mm



JB16-2003枪把灯架

Handle Light Stand

#1.09.051201

- Ⓐ 2200mm
- Ⓑ 1080mm
- Ⓓ $\phi 35$
- Ⓕ 1060mm
- Ⓔ 20x40mm
- Ⓖ 15kg
- Ⓗ 8.12Kg



JB16-001 枪把 Handle
#1.09.051202

CK魔术腿灯架

CK C-stand

Photographic Accessories
摄影附件

44

CK-1 可拆式脚架 Steel Light Stand

#1.09.051101

- ① 3200mm
- ② 1475mm
- ③ 1475mm
- ④ $\phi 25/30/35$
- ⑤ $\phi 30mm$
- ⑥ 1020mm
- ⑦ 20Kg
- ⑧ 9Kg
- ⑨ 1270mm



CK-1/3 Grip Head 圆饼转接头

#1.09.051104



CK-3 可调式脚架 Steel Light Stand

#1.09.051102

- ① 3200mm
- ② 1475mm
- ③ 1475mm
- ④ $\phi 25/30/35$
- ⑤ $\phi 30mm$
- ⑥ 1080mm
- ⑦ 20Kg
- ⑧ 9Kg
- ⑨ 1270mm



CK-2 魔术脚影视灯架 Steel Light Stand

#1.09.051107

- ① 3190mm
- ② 1445mm
- ③ 1445mm
- ④ $\phi 25/30/35$
- ⑤ $\phi 25mm$
- ⑥ 1040mm
- ⑦ 20Kg
- ⑧ 8.7Kg
- ⑨ 1270mm



CK-2 Grip Head 方头圆饼夹

#1.09.051109



CK-90 魔术腿低灯架 Steel Light Stand

#1.09.051111

- ① 1600mm
- ② 900mm
- ③ 900mm
- ④ $\phi 25/30/35$
- ⑤ $\phi 30mm$
- ⑥ 940mm
- ⑦ 20Kg
- ⑧ 5.5Kg



CK-90 中心伸缩杆 Center expansion rod

#1.09.051112

- ① 1440mm
- ② 725mm
- ③ 725mm
- ④ $\phi 25/30/35$
- ⑤ 20Kg



K-4 两用钢管灯架

2-in-1 Use steel tube light stand

#1.09.051305

- ① 3160mm
- ② 1380mm
- ③ 1380mm
- ④ $\phi 25/30/35$
- ⑤ $\phi 25mm$
- ⑥ 1080mm
- ⑦ 20Kg
- ⑧ 6Kg
- ⑨ 1130mm



重型钢管影视灯架

Heavy Steel Light Stand

Photographic Accessories
摄影附件

45

JF-238A 中型影视灯架
Steel Light Stand

#1.09041506

- Ⓐ 2380mm
- Ⓑ 1310mm
- Ⓒ 1310mm
- Ⓓ $\phi 35/30$
- Ⓔ 20x20mm
- Ⓕ 15Kg
- Ⓖ 7.7Kg



JB-290A 专业影视灯架
Steel Light Stand

#1.09.041508

- Ⓐ 2900mm
- Ⓑ 1325mm
- Ⓒ 1100mm
- Ⓓ $\phi 25/30/35$
- Ⓔ 20x20mm
- Ⓕ 1050mm
- Ⓖ 15Kg
- Ⓖ 7Kg



MF-3000F 专业影视灯架
Steel Light Stand

#1.09.041504

- Ⓐ 3100mm
- Ⓑ 1400mm
- Ⓒ 1400mm
- Ⓓ $\phi 30/35/40$
- Ⓔ 25x25mm
- Ⓕ 1240mm
- Ⓖ 20Kg
- Ⓖ 8Kg



JB-4200 大型影视灯架
Steel Light Stand

#1.09.041505

- Ⓐ 4600mm
- Ⓑ 1510mm
- Ⓒ 1400mm
- Ⓓ $\phi 30/35/42/48$
- Ⓔ 25x25mm
- Ⓕ 1600mm
- Ⓖ 20Kg
- Ⓖ 16.3Kg



M-6 两用钢管灯架
2-in-1 Use steel tube light stand

#1.09.051304

- Ⓐ 4080mm
- Ⓑ 1490mm
- Ⓒ 1580mm
- Ⓓ $\phi 25/30/35/40/45$
- Ⓔ 25x25mm
- Ⓕ 1200mm
- Ⓖ 20Kg
- Ⓖ 18Kg
- Ⓖ 1170-1970mm



M-8 旋转式重型不锈钢影视灯架
Rotatable multifunctional stainless Steel Light Stand

#1.09.051306

- Ⓐ 5320mm
- Ⓑ 1680mm
- Ⓒ 1720mm
- Ⓓ $\phi 25/30/35/40/45$
- Ⓔ 25x25mm
- Ⓕ 1440mm
- Ⓖ 30Kg
- Ⓖ 18.75Kg
- Ⓖ 1390-2400mm



平衡顶灯架/重型相机升降架

Balance Overhead Light Stand/Heavy Camera Stand

Photographic Accessories
摄影附件

46

BM-300 重型影视摇臂顶灯架 Boom Steel Light Stand

#1.09.061402


- ① 3100mm
- ② 1310mm
- ③ $\phi 35/40/45$
- ④ 25x25mm
- ⑤ 1500mm
- ⑥ 30Kg
- ⑦ 25.6Kg
- ⑧ 1560~2400mm
- ⑨ $\phi 25/30$ mm



BM-300 钢制手摇斜臂杆 Rail boom steel stand

#1.09.061403

- ① 1560mm
- ② 1560~2400mm
- ③ $\phi 25/30$ mm
- ④ 18Kg
- ⑤ 6.2Kg



适用灯架:

MF-3000F / JB-4200影视灯架
BM-300顶灯架 / BM-395摇臂灯架

BM-395重型手摇升降影视灯架 Hand Lifting Steel Studio Stand

#1.09.061404

- ① 4050mm
- ② 1625mm
- ③ $\phi 40/50/60$
- ④ $\phi 30 \times 30$ mm
- ⑤ 1450mm
- ⑥ 50Kg
- ⑦ 34Kg



JB-200重型相机升降架 Camera stand

#1.09.071101

- ① 2000mm
- ② 400mm
- ③ 10Kg
- ④ 900mm



JB-250重型相机升降架 Camera stand

#1.09.071102

- ① 2500mm
- ② 400mm
- ③ 12Kg
- ④ 1500mm



背景灯架/横臂杆

Background Stand/Cross Arm Stand

Photographic Accessories
摄影附件

47

DDJ-70两用背景灯架

Background Stand

#1.09.011201

- ⌀ 700mm
- ⌀ 210mm
- ⌀ 22.5/26
- 40x20mm
- 600mm
- 10Kg
- 3.08Kg



BL-70X130挂壁横臂灯架

Wall-hung Stand

#1.09.081206

- ⌀ 1300mm
- ⌀ 790mm
- ⌀ 35/30mm
- 5Kg



底座尺寸(Stand base size):300x139mm

调节角度(Adjusting angle):上下170°(From up to down) 左右160°(From left to right)

DDJ-20地灯架

Floor Stand

#1.09.011101

- ⌀ 170mm
- 40x20mm
- 400mm
- 10Kg
- 1.94Kg



L-600F两用灯架

Background Stand

#1.09.011301

- ⌀ 650mm
- ⌀ 100mm
- ⌀ 19/22
- 600mm
- 5Kg
- 1.05Kg



L-600D吸顶灯架

Top Stand

#1.09.021101

- ⌀ 550mm
- ⌀ 360mm
- ⌀ 19/22
- 80x120mm
- 3Kg
- 0.65Kg



RBJ-130反光板支架

Reflector board stand

#1.09.081204

- 800~1300mm
- ⌀ 22mm




L-210 中型斜臂横杆

Rail boom arm

#1.09.081102

- ⌀ 840mm
- 840~2150mm
- ⌀ 21/25/30mm
- 4Kg
- 2.32Kg



HD-230 手持外拍支架 Monopod

#1.09.031303

- ⌀ 2300mm
- ⌀ 775mm
- ⌀ 740mm
- ⌀ 19/22/26/29.5
- 4Kg
- 1.06Kg



B-190 小型臂杆

Rail boom arm

#1.09.081103

- ⌀ 750mm
- 750~1350mm
- ⌀ 19/22mm
- 3Kg
- 0.8Kg



L-195背景窗帘横臂杆

Background curtain crossarm bar

#1.09.081101

- ⌀ 795~1950mm
- ⌀ 20/25/30mm
- 3Kg
- 0.96Kg



JB-004 影视多灯头支架


Multiple Mount Light Stand

#1.09.041507



适用灯架:

- MF-3000F
- JB-4200影视灯架
- BM-300顶灯架
- BM-395摇臂灯架



圆饼夹/脚轮/平衡沙袋/背景布

Pie Clippers/Wheel/Balancing Sandbags/Background Cloth

JB11-036 ϕ 22mm 脚轮 Wheel

#1.09.091101

适配灯架:

JB-300 / M-1/M-2 / JB-2600FP

JB-3000FP / MZ-2400FP/MZ-3000FP

JB11-036A ϕ 25mm 脚轮 Wheel

#1.09.091102

适配灯架:

MZ-3800FP / MZ-4800FP

M-3旋转式灯架 / DBJ-1中号顶灯架



JB11-036B

25x25mm 带脚刹万向脚轮 Wheel

#1.09.091103

适配灯架: MF-3000F重型影视灯架



平衡沙袋

Balance sandbag

#1.09.091302



JB11-036C ϕ 30mm 魔术腿脚轮

#1.09.091104

适配灯架: CK-1 / CK-3 / K-4



JB11-032A 沙袋

Sandbag

#1.09.091301



JB11-038A 元饼多功能夹

Multifunctional folder grip

#1.09.091202



JB11-033B 元饼多功能夹

Multifunctional grip

#1.09.091201



JB11-015(1/8-5/8)转接头

Adapter

#1.09.091402

适用灯架:

CK-1/CK-2/CK90魔术腿底座低角度拍摄



JB11-001(1/4-3/8)转接头

Adapter

#1.09.091401



JB11-063A

带热靴大力夹

Hot shoe clamp

#3.09.011202



JB11-060

影室灯大力夹

Multifunctional clamp

#3.09.011201



JB11-095B

C型影视灯头夹

C-type york clamp

#1.09.091203



S-30延长杆

Extension bar

#1.09.091403



背景布/绿幕

Background cloth/Green screen



1.5x2M双色抠图板

2-in-1 Collapsible background board

黑白双色

Black/white 2-in-1

#3.11.011204

蓝绿双色

Blue/green 2-in-1

#3.11.011205



涤纶吸光背景布

Matt background cloth

尺寸 Dimensions: 1.5x2m 2x3m 3x6m

#3.12.0323XX #3.12.0321XX #3.12.0322XX

涤纶吸光背景布手感细腻顺滑, 高密度, 不易透光, 光照更均匀, 色彩鲜艳且经久不褪色, 手感光滑。摄影视频两用。

Matt background cloth feel delicate smooth, high density, not easy to light, more uniform light, bright color and durable, smooth feel. Photography and video.

横杆背景架/电动升降架/天花路轨

Background stand/Electric lifting frame/Ceiling rail

Photographic Accessories
摄影附件

49

4轴双排电动背景架
4-Axis Double Row Electric Background Stand
#3.12.011502



6轴双排电动背景架
6-Axis Double Row Electric Background Stand
#3.12.011503



天花路轨 Ceiling Rail

路轨标配规格 Rail Standard Size 3m×4m
#3.13.021218



天花路轨 (每米)
#3.13.021101

吊臂 Pantograph
伸缩长度 Height 43~200cm
承重Max loaded 5kg
#3.13.021201

双层滑轮
Double wheel
#3.13.021204

电线滑轮
Wire wheel
#3.13.021205


尾塞
End cap
#3.13.021213

安装板
Install board
#3.13.021212



保险绳
Safe rope
#3.13.021209

横杆伸缩背景架 Background stand

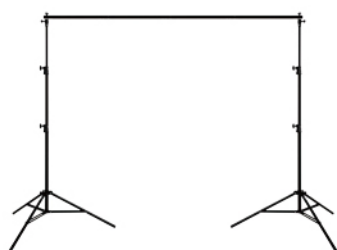

JB10-3000横杆背景架
#1.09.081201
横杆 Rail: 1725~3000mm
高度 Height: 3000mm

JB11-3200FPG横杆背景架
#1.09.081202
横杆 Rail: 800mmx4=3200mm
高度 Height: 2850mm

JB12-3200FPG横杆背景架
#1.09.081203
横杆 Rail: 800mmx4=3200mm
高度 Height: 3000mm

PVC/硫酸纸支架
PVC/ sulphate paper holder



可选尺寸 Available size
90x200cm #1.09.081205



硫酸纸 (张)
Sulphate paper
1189x889mm
#3.12.032001



硫酸纸 (筒)
Sulphate paper
1840x120mm
#3.12.032003

BS-300伸缩背景杆 Background telescopic rod

#1.09.081104

横杆长度 Rail | 1.25m ~ 3m



通用接口适用各种类型灯架, 三节快速伸缩长短轻松调节
Universal adapter, Speedy stretching & shrinking in three sections



ST300不锈钢背景横杆
φ48x3m #1.09.081107

ST300不锈钢背景横杆 (带灯头支架)
φ48x3m #1.09.081108



手拉升降套轴
Hand operated lifting shaft
#3.13.081101



双钩支架
Bouble Bracket
#3.13.081103



三钩支架
Triple Bracket
#3.13.081104

直播相机万向云台/万向魔术手

MK-9 Ball Head Mount/Magic Hand

Photographic Accessories
摄影附件

50



MK-9直播相机云台
Camera ball head mount
H:60mm ϕ 35mm
#3.09.011303



AQ-20小型球型相机云台
AQ-20 Ball Head Mount
H:50mm ϕ 28mm
#3.09.011302



M12万向魔术手
M12 magic arm
H:300mm
#3.09.011111



A-4球型热靴小云台
A-4 Ball Head Mount
H:55mm
#3.09.011301



1/4-1/4灯棒连接件
1/4' to 1/4' male connector
H:30mm
#3.09.011110

套装箱包/灯架袋

Kit Bag/Light Stand Bag

L-106专业套装箱
Pro Kit Bag
106(L)x32(W)x30(H)cm
#1.12.031503

L-80标准套装箱
Standard Kit Bag
80(L)x30(W)x30(H)cm
#1.12.031502



L-92准专业套装箱
Sub-pro Kit Bag
92(L)x30(W)x30(H)cm
#1.12.031504

L-71便携套装箱
Standard Kit Bag
71(L)x25(W)x25(H)cm
#1.12.031501



EF80/120便携套装箱
Standard Kit Bag
38(L)x24(W)x18(H)cm
#1.12.031514



L-72/L-82便携套装箱
Kit Bag
72(L)x22(W)x26(H)cm
82(L)x28(W)x30(H)cm
#1.12.031512 #1.12.031513



EFP50套装箱
Kit Bag
92(L)x8(W)x45(H)cm
#1.12.031506



FE22426灯架袋
Light Stand Bag
117cm
#1.12.011201



P80平板灯套装箱
Kit Bag
44(L)x6(W)x36(H)cm
#1.12.031515



L-80灯架袋
Light Stand Bag
80cm
#1.12.011101